

ARTICLE

Versatile and scalable synthesis of cyclic organic carbonates under organocatalytic continuous flow conditions

Received 00th January 20xx,
Accepted 00th January 20xx

Romarc G  rardy,^a Julien Estager,^b Patricia Luis,^c Damien P. Debecker,^d and Jean-Christophe M. Monbaliu^{*a}

DOI: 10.1039/x0xx00000x

The benchmark route for the preparation of cyclic organic carbonates starts from toxic, volatile and unstable epoxides. In this work, cyclic organic carbonates are prepared according to an alternative sustainable and intensified continuous flow conditions from the corresponding 1,2-diols. The process utilizes dimethyl carbonate (DMC) as low toxicity carbonation reagent and relies on the organocatalytic activity of widely available and cheap organic ammonium and phosphonium salts. Glycerol is selected as a model substrate for preliminary optimization with a library of homogeneous ammonium and phosphonium salts. The nature of the anion dramatically influences the catalytic activity, while the nature of the cation does not impact the reaction. Upon optimization, glycerol carbonate is obtained in 95% conversion and 79% selectivity within 3 min of residence time at 180   C (11 bar) with 3.5 mol% of tetrabutylammonium bromide as organocatalyst. A straightforward liquid-liquid extraction procedure enables both the purification of glycerol carbonate and the recycling of the homogeneous catalyst. The conditions are amenable to refined and crude biobased glycerol, although conversions are lower in the latter case. Control experiments suggest that water present in the crude samples induces significant hydrolysis of glycerol carbonate. The reaction conditions are then successfully applied on a wide diversity of substrates, affording the corresponding cyclic carbonates in overall good to excellent yields (20 examples, 45-95%). The substrate scope notably encompasses biobased starting materials such as glycerol ethers and erythritol-derived diols. In-line NMR is featured as a qualitative analytical tool for real-time reaction monitoring. The scalability of this carbonation procedure on glycerol is assessed in a commercial pilot-scale silicon carbide continuous flow reactor of 60 mL internal volume. Glycerol carbonate is obtained in 76% yield, corresponding to a productivity of 13.6 kg day⁻¹.

Introduction

Cyclic organic carbonates, or 1,3-dioxolan-2-ones (**1**), are biodegradable and non-toxic compounds with a low-vapor pressure. A broad range of industrial applications for cyclic organic carbonates have been reported, including their use as solvents, as electrolytes carriers in batteries, and as building blocks for the preparation of various chemicals and polymers.¹⁻⁶ Two main strategies are typically reported for their preparation: (a) the carbonation of 1,2-diols (**2**) and (b) the carboxylation of epoxides (**3**) (Figure 1). The latter is the benchmark route for the preparation of functionalized cyclic organic carbonate, and appears as the most sustainable since it directly utilizes CO₂ as a C₁ platform.^{7,8} However, epoxides are in general toxic, volatile and unstable.⁹ By contrast, 1,2-diols have a low toxicity profile, a low vapor pressure and are generally stable. Direct

carboxylation of 1,2-diols with CO₂ is currently not synthetically viable since it typically requires harsh conditions, elaborated catalysts and toxic additives to attain poor yields.^{10,11}

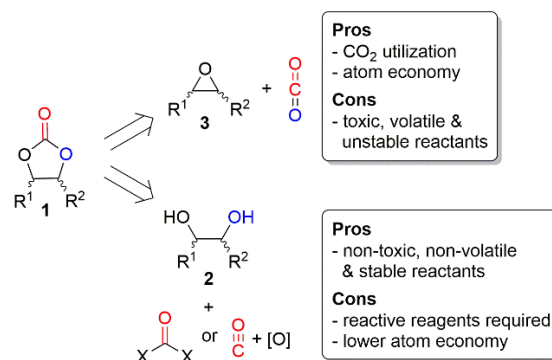


Fig. 1 Main strategies for the preparation of cyclic organic carbonates. R¹, R² = alkyl, aryl.

Reactive carbonation reagents are required to convert 1,2-diols into cyclic carbonates (Table 1); typical examples include enthalpy-activated reagents such as phosgene,¹² alkyl chloroformates¹³ and carbonyldiimidazole (CDI).¹⁴ The utilization of phosgene on the industrial scale raises safety concerns. Alkyl chloroformates and CDI are far less toxic, but are typically derived from phosgene, expensive

^a Center for Integrated Technology and Organic Synthesis, Research Unit MolSys, University of Li  ge, B-4000 Li  ge (Sart Tilman), Belgium.
E-mail: jc.monbaliu@uliege.be; http://www.citos.uliege.be




^b Certech, Rue Jules Bordet, Zone Industrielle C, B-7180 Seneffe, Belgium.

^c Materials & Process Engineering (IMMC-IMAP), UCLouvain, B-1348 Louvain-la-Neuve, Belgium.

^d Institute of Condensed Matter and Nanosciences, UCLouvain, B-1348 Louvain-la-Neuve, Belgium.

Electronic Supplementary Information (ESI) available: Characterization of compounds, details of the fluidic reactors and components, additional experimental data and procedures. See DOI: 10.1039/x0xx00000x

Table 1. Comparison of common reagents utilized for the carbonation of 1,2-diols.

Classification	Reagent	Pros	Cons	Ref
activated, phosgene- sourced	 phosgene	no catalyst required	extremely toxic	12
	 alkyl chloroformates		gaseous toxic	13
	 CDI		water- sensitive expensive	14
non activated	 + [O]	atom economy cheap and widely available	extremely toxic gaseous Pd catalyst + oxidant required	17,18
	 urea	CO ₂ - sourced cheap and widely available	corrosive and gaseous by- product (NH ₃) catalyst required solvent required for flow processing	19
activated, non phosgene- sourced	 diphenyl carbonate	widely available no catalyst required	toxic by- product (PhOH) solvent required for flow processing	20
	 dialkyl carbonates	widely available low toxicity by- products (ROH)	catalyst required	21- 24

CDI = carbonyldiimidazole. R = Me or Et.

and water-sensitive.^{15,16} Other reagents such as carbon monoxide in combination with an oxidant,^{17,18} urea,¹⁹ diphenyl carbonate,²⁰ and

dialkyl carbonates^{21–24} are reported as well; yet, these strategies suffer from some drawbacks (Table 1).




By contrast to higher carbonates, dimethyl and diethyl carbonates (DMC and DEC, respectively) have attracted considerable attention as a class of “green” solvents and reagents for organic transformations. DMC and DEC are widely available, non-toxic liquids, and they are not sourced from phosgene.^{25–27} The carbonation of 1,2-diols with DMC or DEC releases 2 molar equivalents of methanol or ethanol, respectively, *i.e.* non-corrosive by-products that can be easily recycled and utilized as solvents, reagents or fuels.

One of the most privileged substrates for carbonation with DMC/DEC is glycerol (**4a**)^{28–33} and the methodology was only scarcely extended to other functionalized 1,2-diol substrates.^{21–24} Numerous homogeneous and heterogeneous catalysts are described for the carbonation of glycerol with DMC/DEC,^{28–33} including organocatalysts. Organocatalysts have a bright forecast for the sustainable upgrading of biobased chemicals.³⁴ Typical organocatalysts described for the carbonation of **4a** with DMC/DEC include amines, amidines, guanidines, N-heterocyclic carbenes, phosphazenes, enzymes, organic salts and ionic liquids.^{21,28–33} However, one of the main drawbacks precluding the utilization of organocatalysts for the upgrading of low-cost, high-volume chemicals such as **4a**, is their elevated cost.

Despite the many assets of continuous flow processes for the manufacturing of commodity and fine chemicals,^{35,36} only a few reports described the continuous flow carbonation of **4a** with DMC/DEC (Table 2).^{21,37–42} De Souza and coworkers described a process involving 1.5 mol% of diazabicyclo(5.4.0)undec-7-ene (DBU) as catalyst, 3 equiv. of DMC and solvent-free conditions. Glycerol carbonate (**1a**) was obtained with 80% conversion and 82% selectivity within 8 min at 120 °C.³⁸ Selva *et al.* reported a catalyst-free procedure for **1a** under high pressure and temperature conditions (230–250 °C, 50 bar) and using methanol as a solvent. 10 equiv. of DMC and 15 min of residence within the reactor were necessary to reach conversion in the 78–94% range and 83–92% selectivity. The methodology was also successfully extended to ethylene and propylene glycol (**2b**, **2c**).⁴⁰ Baxendale and coworkers described a process using 3 wt% of tetraethylammonium pipercolinate and 3.5 equiv. of DMC for the synthesis of carbonate **1a**. Ethanol was used as the solvent and 30 min of residence at 140 °C was required to obtain **1a** with 90% conversion and 85% selectivity.⁴¹ Monbaliu and coworkers reported a solvent-free procedure utilizing 1 mol% of 2-*tert*-butyl-1,1,3,3-tetramethylguanidine and 3 equiv. of DMC. Glycerol carbonate (**1a**) was obtained within 2 min at 135 °C with 87% selectivity at 94% conversion. The methodology was also successfully extended to 8 other simple substrates upon minor adjustment of the conditions.²¹ However, these studies did not demonstrate the applicability of the method for the preparation of functionalized carbonates, and relied on expensive organocatalysts or extreme conditions.

Our involvement in scalable, intensified and organocatalyzed carbonation processes led us to consider cheap, widely available and low-toxicity⁴³ homogeneous organic salts from the ammonium and

Table 2. Homogeneous continuous flow processes from the prior Art for the carbonation of glycerol (**4a**) into glycerol carbonate (**1a**) with DMC.

	Solvent	DMC	Catalyst	Conditions	Conv. (%)	Selec. (%)	Scale-up	1,2-Diol substrate scope
De Souza (2015) ³⁸	neat	3 equiv.	 (1.5 mol%)	120 °C 8 min	80	82	none	none
Selva (2016) ⁴⁰	MeOH	10 equiv.	none	230-250 °C 15 min	78-94	83-92	none	3 substrates
Baxendale (2018) ⁴¹	EtOH	3.5 equiv.	 (3 wt%)	140 °C 30 min	90	85	2.1 kg day ⁻¹	none
Monbaliu (2019) ²¹	neat	3 equiv.	 (1 mol%)	135 °C 2 min	94	87	8.1 kg day ⁻¹	9 substrates
This work	neat	2.25 equiv.	NBu ₄ Br (3.5 mol%)	180 °C 3 min	95	79	13.6 kg day ⁻¹	20 substrates

phosphonium types. The related prior Art contains one patent filed in 1992, where the carbonation of glycerol was effected in batch at 120 °C in the presence of DMC and tetrabutylammonium bromide. Glycerol carbonate (**1a**) was obtained with 92% conversion and 92% selectivity after 6 h under these conditions. The methodology was also extended to ethylene (**2b**) and propylene (**2c**) glycol.⁴⁴ In 2014, Selva reported carbonate phosphonium salts as efficient catalysts for the carbonation of **2b** and **2c**, which was conducted in batch at 90 °C.⁴⁵

In this work, we report an efficient organocatalytic process for the preparation of cyclic organic carbonates. The procedure is unique since (a) it involves intensified continuous-flow conditions (*i.e.* solvent-free or highly concentrated media, short reaction times, low catalytic loadings and low excess of DMC), (b) it utilizes cheap, air-stable and benign organic salts of the ammonium and phosphonium-type as catalysts, and (c) it is extended to a wide range of functionalized diols (20 examples). A straightforward liquid-liquid extraction procedure for the isolation of glycerol carbonate and for the recycling of the homogeneous catalyst is proposed. Refined and crude biobased glycerol samples are evaluated as well, giving promising results. The process also features low-field in-line NMR analysis for qualitative real-time reaction monitoring, and scalability is assessed in a pilot-scale continuous flow reactor.

Experimental section

Chemicals. Ethanediol, 1,2-propanediol, 1,2,3-propanetriol, 3-methoxy-1,2-propanediol, 3-*tert*-butoxy-1,2-propanediol, 3-allyloxy-1,2-propanediol, 3-(*o*-tolylloxy)-1,2-propanediol, 3-(dimethylamino)-1,2-propanediol, 3-morpholino-1,2-propanediol, 1,2-butanediol, 2,3-butanediol, 3-butene-1,2-diol, 1,4-anhydroerythritol, *cis*-1,2-cyclohexanediol, *trans*-1,2-cyclohexanediol, 1,2-octanediol, tetramethylammonium bromide, tetraethylammonium bromide, tetrabutylammonium bromide, tetra-*n*-octylammonium bromide, tetramethylphosphonium bromide, tetrabutylphosphonium

bromide, tetraphenylphosphonium bromide, tetrabutylammonium chloride, tetrabutylammonium iodide, tetrabutylammonium acetate, tetrabutylammonium 2-hydroxybenzoate, tetrabutylammonium trifluoromethanesulfonate, tetrabutylammonium tetrafluoroborate, tetrabutylammonium hexafluorophosphate, dimethyl carbonate, 2,3-epoxy-1-propanol and dimethyl sulfoxide were obtained from commercial sources and used as received. Refined and crude biobased glycerol samples were provided by CargillTM and Valtris Champlor SAS. Methyl ((2-oxo-1,3-dioxolan-4-yl)methyl) carbonate, 3-propargyloxy-1,2-propanediol, 3-furfuryloxy-1,2-propanediol, 3,3'-(butane-1,4-diylbis(oxy))bis(propane-1,2-diol) and 3,3'-((furan-2,5-diylbis(methylene))bis(oxy))bis(propane-1,2-diol) were prepared following literature procedures (Supporting Information).

Experimental Setup (Microscale). Microfluidic continuous flow reactors consisted in stainless steel (SS) coils (1.58 mm o.d. x 500 µm i.d.) equipped with SS nuts, ferrules and unions (VALCO). In experiments involving crude glycerol, the reactor consisted in a SS coil (3 mm o.d. x 2.1 mm i.d.) equipped with reducing unions (1/8" to 1/16", Swagelok). The reactors were thermoregulated with a HeidolphTM MR Hei-Tec[®] oil bath equipped with a Pt-1000 temperature sensor. Sections of the reactors that were not subjected to high temperatures were constructed from PEEK or PFA tubings (1.58 mm o.d. x 750 µm i.d.) equipped with PEEK/ETFE connectors and ferrules (IDEX/Upchurch Scientific). Feed solutions were handled with high force Chemyx Fusion 6000 syringe pumps equipped with SS syringes and Dupont Kalrez O-rings or with Knauer Azura P 4.1S HPLC pumps. Downstream pressure was regulated using a dome-type back pressure regulator (Zaiput Flow Technologies BPR-10) connected to a nitrogen cylinder to set the working pressure (11 bar). In-line NMR reaction monitoring was carried out using a 43 MHz SpinsolveTM carbon NMR spectrometer from Magritek[®].

Experimental Setup (Pilot-scale). Mesofluidic experiments were carried out in a Corning® Advanced-Flow™ G1 SiC reactor featuring 6 fluidic modules (FM) connected in series (10 mL/FM). Feed and collection lines consisted of PFA tubing (1/4" o.d., 0.047 inch wall thickness) equipped with PFA or SS Swagelok connectors and ferrules. Feed solutions were handled with Corning dosing lines (HMP gear pumps). The reactor was thermoregulated with a LAUDA Integral XT 280 thermostat using LAUDA Therm 180 silicone oil. A temperature probe was positioned at a critical position along the thermofluid flow path for temperature monitoring. Downstream pressure was regulated using a dome-type back pressure regulator (Zaiput Flow Technologies BPR-1000) connected to a nitrogen cylinder to set the working pressure (11 bar).

Analytical methods. Conversion and yield were determined by gas chromatography coupled with flame ionization detection (GC/FID) using a Shimadzu GC-2014 gas chromatograph. Selectivity is defined as the ratio between the yield and the conversion. Where specified, yields were determined by high field ^1H NMR spectroscopy using mesitylene as the internal standard. Structural identity was confirmed by ^1H and ^{13}C NMR spectroscopy conducted on a high field (400 MHz) Bruker Avance spectrometer in CDCl_3 or $\text{d}_4\text{-MeOD}$ (Supporting Information). The chemical shifts are reported in ppm relative to TMS as the internal standard or to the solvent residual peak. GC conversions were determined using external calibration curves established with commercial standards of ethanediol, 1,2-propanediol, 1,2,3-propanetriol, 3-methoxy-1,2-propanediol, 1,2-butanediol, and 3-butene-1,2-diol. GC yields were determined using external calibration curves established with commercial standards of 1,3-dioxolan-2-one, 4-methyl-1,3-dioxolan-2-one, 4-hydroxymethyl-1,3-dioxolan-2-one, 4-methoxymethyl-1,3-dioxolan-2-one, 4-ethyl-1,3-dioxolan-2-one, 4-vinyl-1,3-dioxolan-2-one, 2,3-epoxy-1-propanol and a synthesized sample of methyl ((2-oxo-1,3-dioxolan-4-yl)methyl) carbonate. 4-Hexyl-1,3-dioxolan-2-one, 4-(*tert*-butoxymethyl)-1,3-dioxolan-2-one, 4-(allyloxy)methyl-1,3-dioxolan-2-one, 4-(prop-2-yn-1-yloxy)methyl-1,3-dioxolan-2-one, 4-((furan-2-ylmethoxy)methyl)-1,3-dioxolan-2-one, 4-((*o*-tolylloxy)methyl)-1,3-dioxolan-2-one, 4-((dimethylamino)methyl)-1,3-dioxolan-2-one, 4-(morpholinomethyl)-1,3-dioxolan-2-one, 4,5-dimethyl-1,3-dioxolan-2-one, *cis*-hexahydro-1,3-benzodioxol-2-one, 2-hydroxycyclohexyl methyl carbonate, tetrahydrofuro[3,4-*d*][1,3]dioxol-2-one, 4,4'-((butane-1,4-diylbis(oxy))bis(methylene))bis(1,3-dioxolan-2-one) and 4,4'-(((furan-2,5-diylbis(methylene))bis(oxy))bis(methylene))bis(1,3-dioxolan-2-one) yields were determined by ^1H NMR spectroscopy using mesitylene as the internal standard.

Typical run 1: microscale synthesis of glycerol carbonate (1a) from commercial glycerol. The syringe pump used to deliver the solution of glycerol (**4a**) containing 3.5 mol% of NBu_4Br was set to $67.2\ \mu\text{L min}^{-1}$ (1 equiv. of **4a**) and the syringe pump used to deliver neat DMC was set to $154\ \mu\text{L min}^{-1}$ (2.25 equiv). Both streams were mixed through a PEEK T-mixer, and the biphasic mixture entered a 1/16" o.d. SS coil (0.67 mL, 3 min of residence) heated at $180\ ^\circ\text{C}$. The outlet of the

reactor was connected to a dome-type back pressure regulator set at 11 bar (Figure 5). After equilibration, the reactor effluent was collected, diluted with EtOH, and analyzed by GC/FID (**4a** conv. = 95%, **1a** yield = 75%, see Figure 5).

Typical run 2: microscale synthesis of glycerol carbonate (1a) from crude biobased glycerol. Crude biobased glycerol was filtered prior to use. The syringe pump used to deliver the solution of crude biobased glycerol (**4a**) containing 3.5 mol% of NBu_4Br was set to $212\ \mu\text{L min}^{-1}$ (1 equiv. of **4a**) and the syringe pump used to deliver neat DMC was set to $411\ \mu\text{L min}^{-1}$ (2.25 equiv). Both streams were mixed through a PEEK T-mixer, and the biphasic mixture entered a 1/8" o.d. SS coil (1.87 mL, 3 min of residence) heated at $180\ ^\circ\text{C}$. The outlet of the reactor was connected to a dome-type back pressure regulator set at 11 bar. After equilibration, the reactor effluent was collected, diluted with EtOH, and analyzed by GC/FID (**4a** conv. = 30%, **1a** yield = 29%, see Table 5, entry 3).

Typical run 3: microscale synthesis of 4-((*o*-tolylloxy)methyl)-1,3-dioxolan-2-one (1l). The HPLC pump used to deliver the feed solution of mephesin (**2l**, 3 M) and NBu_4Br (0.105 M) in DMSO was set to $222\ \mu\text{L min}^{-1}$ (1 equiv. of **2l**). The HPLC pump used to deliver neat DMC was set to $168\ \mu\text{L min}^{-1}$ (3 equiv). Both streams were mixed through a PEEK T-mixer, and the mixture entered a 1/16" o.d. SS coil (1.17 mL, 3 min of residence) heated at $180\ ^\circ\text{C}$. The outlet of the reactor was connected to a dome-type back pressure regulator set at 11 bar (Figure 5). After equilibration, the reactor effluent was collected and analyzed by ^1H NMR with mesitylene as internal standard (**1l** yield = 86%, see Figure 5).

Typical run 4: pilot-scale synthesis of glycerol carbonate (1a). The pump used to deliver the preheated ($60\ ^\circ\text{C}$) feedstock solution of glycerol (**4a**) containing 3.5 mol% of NBu_4Br was set to $10.9\ \text{g min}^{-1}$ (1 equiv. of **4a**), and the pump used to deliver the feedstock solution of DMC was set to $21.4\ \text{g min}^{-1}$ (2.25 equiv.). Both streams came into contact in the first FM of the Corning® Advanced-Flow™ G1 SiC reactor operated at $180\ ^\circ\text{C}$, and further reacted in the 5 other FMs, also operated at $180\ ^\circ\text{C}$ (2 min residence time, 60 mL total internal volume, see Figure 7). The outlet of the reactor consisted in a 1/4" o.d. PFA cooling loop immersed in a water bath, and connected to a dome-type back pressure regulator set at 11 bar. After equilibration, the reactor effluent was collected, diluted with EtOH and analyzed by GC/FID (**4a** conv. = 95%, **1a** yield = 76%).

Results and discussion

Screening of organic salts as catalysts. The investigation began by screening different organic salts for the model carbonation of neat glycerol (**4a**) with DMC under continuous flow conditions. Several complex and expensive ionic liquids/organic salts are already described as efficient catalysts for this reaction in batch^{46–51} and flow.⁴¹ Only cheap and commercially available catalytic materials were considered in the present work (Table 3). Organic salts featuring a hydroxide anion are in general air-sensitive, and were thus not considered. For solubility reasons, the catalysts were

typically loaded within the glycerol feedstock solution. Neat DMC was handled as a separate feed since it forms a heterogeneous mixture with **4a**. Both liquid feeds were mixed through a T-mixer and reacted in a heated stainless-steel (SS) capillary coil (Figure 2). A back pressure regulator (BPR) was inserted downstream the SS coil to maintain the reactor under 11 bar of counterpressure. Quantitative analyses were carried out by off-line GC/FID analysis of the crude reactor effluent (Supporting Information, section 2.2). Under these conditions, glycerol carbonate (**1a**) was the major product, although the reaction mixture also contained minor side-products including glycidol (**3a**) and methyl ((2-oxo-1,3-dioxolan-4-yl)methyl) carbonate (**5a**). Although **5a** has no commercial application, **3a** is a high-value added building block, and several reports studied the upgrading of glycerol into glycidol using glycerol carbonate as reaction intermediate.^{47,52–54}

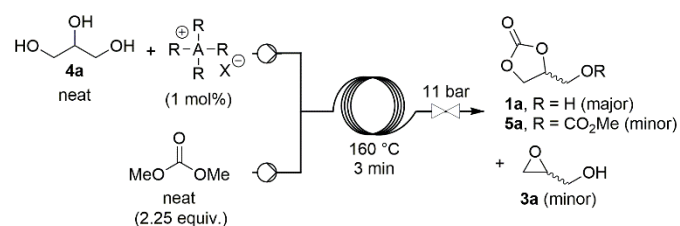


Fig. 2 Schematic continuous flow setup for the carbonation of glycerol (**4a**) with dimethyl carbonate.

Initial conditions involved a residence time of 3 min, a reactor temperature of 160 °C, 2.25 equiv. of DMC, and 1 mol% of organic salt catalyst. A control experiment without catalyst yielded a mere 5% glycerol conversion (Table 3, entry 1). Tetrabutylammonium bromide served as a reference catalyst,⁴⁴ and afforded glycerol carbonate (**1a**) with 63% conversion and 95% selectivity (entry 2). Within the ammonium bromides, short or long alkyl chains gave overall similar results in terms of conversion (56–63%) and selectivity (90–95%, entries 2–4). Tetraoctylammonium bromide was insoluble in both feeds and could not be assessed. Similarly, phosphonium bromides of various bulkiness gave glycerol conversion in the 58–59% range and a selectivity varying between 87 and 91% (entries 5–7).

The nature of the anion impacted significantly the catalytic activity. Changing the anion from bromide to chloride had only a minor effect on both conversion (59%) and selectivity (89%, entry 8). Tetrabutylammonium iodide and tetrabutylammonium 2-

Table 3. Evaluation of organic salts as catalysts for the conversion of glycerol (**4a**) into glycerol carbonate (**1a**).

Entry ^a	Catalyst	4a conv. (%) ^b	1a selec. (%) ^b
1	-	5	87
2	NBu ₄ Br	63	95
3	NMe ₄ Br	56	92
4	NEt ₄ Br	61	90
5	PMe ₄ Br	59	91
6	PBu ₄ Br	59	87
7	PPh ₄ Br	58	88
8	NBu ₄ Cl	59	89
9	NBu ₄ (OAc)	58	88
10 ^c	NBu ₄ (OTf)	0	-
11 ^c	NBu ₄ BF ₄	0	-
12 ^c	NBu ₄ PF ₆	5	99

^a Process conditions are described on Figure 2. ^b Conversion and yield were determined by GC/FID. ^c The catalyst is insoluble in glycerol and was dissolved in the DMC feedstock solution.

hydroxybenzoate were insoluble in both feeds and could not be assessed.

Tetrabutylammonium acetate [NBu₄(OAc)] gave results similar to that of NBu₄Br, with 58% conversion and 88% selectivity (entry 9). On the other hand, non-coordinating anions such as triflate (CF₃SO₃⁻, OTf), tetrafluoroborate (BF₄⁻) and hexafluorophosphate (PF₆⁻) were barely active as catalysts (entries 10–12). Similar observations were reported by Sairi *et al.* in relation with the catalytic efficiency of various ionic liquids for the conversion of **4a** into **1a** with DEC. Increasing the hydrogen-bonding ability of the anion improved the activity of the catalyst. For instance, the authors reported that 1-butyl-3-methylimidazolium tetrafluoroborate gave a mere <5% glycerol conversion, while 1-ethyl-3-methylimidazolium acetate gave 94% conversion under the same conditions (120 °C, 2 h, 0.5 mol% of catalyst, 2 equiv. of DEC).⁴⁸ Gu and coworkers reported that the catalytic activity of hydroxypropyl-tripentylammonium hydroxide and halides for the conversion of **4a** into **1a** increased with the basicity of the anion. The yield of **1a** as a function of the anion nature followed the order: OH⁻ (83%) > Cl⁻ (21%) = Br⁻ (21%) > I⁻ (11%), under identical reaction conditions (80 °C, 90 min, 0.9 mol% of catalyst, 2 equiv. of DMC).⁴⁹ Reports by Kelkar and Selva on the carbonation of alcohols with DMC catalyzed by ionic liquids suggested that both the nature of the anion and of the cation dictate the catalytic activity. A

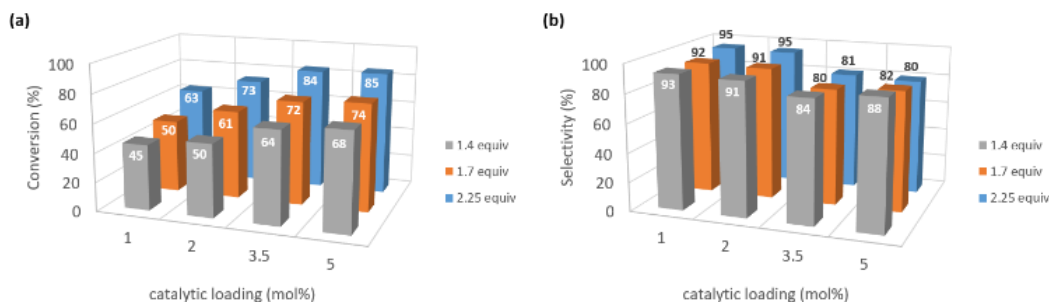


Fig. 3 Evolution of (a) glycerol conversion and (b) glycerol carbonate selectivity as a function of the NBu₄Br loading and the excess of dimethyl carbonate. Conditions: T = 160 °C, residence time = 3 min, P = 11 bar.

nucleophilic and electrophilic activation was proposed, where the anion and the cation activate the alcohol and carbonyl moieties, respectively.^{53,55} By contrast, Gu and coworkers showed by FTIR the absence of interaction between a propyl-tripentylammonium cation and the carbonyl moiety of DMC.⁴⁹ Among the organic salts evaluated in the present work, the nature of the anion dramatically influenced the catalytic activity, while the nature of the cation did not significantly influence the outcome of the reaction. The highest yield in **1a** (60%) was obtained with tetrabutylammonium bromide.

Process optimization. The parameters influencing the carbonation of glycerol (**4a**) with DMC were next evaluated. The optimization concerned the residence time, the temperature and the loading in NBu₄Br, using different molar ratio between DMC and **4a**.

Preliminary trials were carried out at 160 °C with a residence time of 3 min and an increasing DMC/**4a** ratio (1.4, 1.7 or 2.25). The effect of the catalytic loading (1, 2, 3.5 or 5 mol%) on the reaction was investigated. This parameter affected both conversion and selectivity (Figure 3). Increasing the molar amount of NBu₄Br in the glycerol feed from 1 to 5 mol% raised the conversion from 45 to 68% (with 1.4 equiv. of DMC), from 50 to 74% (with 1.7 equiv. of DMC), and from 63 to 85% (with 2.25 equiv. of DMC). Although having a positive impact on the conversion, the increase in NBu₄Br loading decreased the selectivity for glycerol carbonate (**1a**). It declined from 93 to 84% (with 1.4 equiv. of DMC), from 92 to 82% (with 1.7 equiv. of DMC), and from 95 to 80% (with 2.25 equiv. of DMC). The decrease in selectivity for **1a** indicates the increasing formation of other side-products. The formation of glycidol (**3a**) increased with larger catalytic loadings. Selectivity for **3a** evolved with the catalytic loading from 1.8 to 7.4% (with 1.4 equiv. of DMC), from 2.9 to 8.5% (with 1.7 equiv. of DMC), and from 1.1 to 7.8% (with 2.25 equiv. of DMC). A similar impact of the catalytic loading on the selectivity for **1a** and **3a** was observed by others using various ionic liquids as catalysts for the reaction between glycerol and DMC/DEC.^{47,48,52–54} The carbonation of glycerol with DMC/DEC toward **1a** and the decarboxylation of **1a** into glycidol are consecutive reactions that are both catalyzed by compounds with hydrogen bonding ability or basic sites. It is therefore expected that an increase in the catalytic loading leads to an increase in selectivity for side-product **3a**. The selectivity for methyl ((2-oxo-1,3-dioxolan-4-yl)methyl) carbonate (**5a**) remained low (in the 0.1–1.2% range), regardless of the conditions utilized. While slightly higher yields were obtained with a 5 mol% loading in NBu₄Br, 3.5 mol% gave a good balance between conversion, selectivity and cost-efficiency, and it was defined as the optimized value for further optimization.

Next, the influence of the residence time on the reaction was investigated (Supporting Information, section 2.3.1). An increase from 3 to 5 min merely improved the conversion of glycerol (**4a**), irrespective of the DMC/**4a** molar ratio. Similarly, the selectivity for **1a** was not affected by the residence time or the excess of DMC. The selectivity for glycidol (**3a**) decreased with the increase in residence time, which might be rationalized by degradation reactions of **3a**, such as oligomerization.⁵⁶ The selectivity for compound **5a** followed an opposite trend, slightly increasing with the residence time.²¹ A

residence time of 3 min was selected as the optimized value, giving the highest productivity for **1a** (0.78 mol day^{−1} with 2.25 equiv. of DMC).

The influence of the temperature (150–180 °C) was also evaluated (Supporting Information, section 2.3.2). Increasing the temperature improved the conversion of glycerol (**4a**), but had no significant effect on the selectivity for glycerol carbonate (**1a**) and for glycidol (**3a**).^{52,54} By contrast, the selectivity for side-product **5a** slightly increased with the temperature.²¹

To sum up this round of optimizations, the highest productivity for glycerol carbonate (95% conversion, 79% selectivity, 0.85 mol day^{−1}) was obtained at 180 °C within 3 min of residence time in the presence of 3.5 mol% of NBu₄Br and 2.25 equiv. of DMC.

Purification. Although glycerol carbonate can be purified by vacuum distillation, the low volatility of **1a** (b.p. = 145–148 °C at 0.2 mmHg⁴¹) makes the procedure energy-intensive. In our hands, vacuum distillation of a crude reactor effluent yielded only glycidol (**3a**) through NBu₄Br-catalyzed decarboxylation of **1a**.^{47,52–54} An alternative purification procedure was sought and a liquid-liquid extraction procedure was devised⁵⁷ to separate unconverted **4a**, side-products **3a** and **5a**, as well as NBu₄Br, from the target compound **1a**. A model solution containing the above-mentioned compounds was prepared, and several extraction solvents were screened (Table 4 and Supporting Information, section 2.4). Glycerol (**4a**) was quantitatively retained in the aqueous phase, irrespective of the organic solvent utilized. Only MIBK was able to extract a small fraction (11%) of **4a** from the aqueous phase (entry 1). By contrast, side-product **5a** was efficiently extracted (68–99.9%) by most solvents (entries 1–7, 9) but diethyl ether and toluene (40% and 50% extracted, entries 8 and 10, respectively). In general, oxygenated solvents such as *n*-propyl acetate, *n*-butyl acetate, diethyl ether and MTBE, were slightly more efficient for the extraction of glycerol carbonate (**1a**) and glycidol (**3a**) than that of NBu₄Br (entries 2–4, 8–9). Chlorinated solvents gave the most interesting results, as they were able to selectively extract NBu₄Br, while retaining most of **1a** in the aqueous phase (entries 5–7). Upon optimization of the extraction volumes, chloroform enabled extraction of 83% of tetrabutylammonium bromide, while retaining 80% of **1a** in the aqueous phase (entry 7).

Based on these results, we applied the methodology on a crude reactor effluent (Supporting Information, section 2.5). At first, excess DMC and by-product MeOH were removed under reduced pressure. Then, the crude was diluted with water and washed with CHCl₃ to remove side-product **5a** as well as NBu₄Br. The chloroform phase could be further processed to recycle the catalyst. The aqueous phase was then loaded with 1 wt% of NaCl, and glycerol carbonate was extracted with MIBK, enabling its separation from unconverted **4a**. Eventually, **1a** was obtained in 60% yield (based on glycerol) after removal of MIBK under reduced pressure. The target compound was contaminated with traces of **3a** (3.1 mol% with respect to **1a**), **4a** (2.7 mol% with respect to **1a**), **5a** (0.6 mol% with respect to **1a**) and NBu₄Br (1.9 mol% with respect to **1a**).

Table 4. Optimization of the purification of glycerol carbonate (**1a**) by liquid-liquid extraction

Entry ^a	Organic solvent	Aqueous phase ^b	Volume of organic solvent	Amount of compound extracted in the organic solvent (%)				
				1a	3a	4a	5a	NBu ₄ Br
1	MIBK	NaCl 1 wt%	3 x 5 mL	90	85	11	>99.9	98
2	AcOPr	H ₂ O	3 x 5 mL	79	76	0	95	59
3	AcOBu	H ₂ O	3 x 5 mL	47	- ^c	0	>99.9	16
4	AcOBu	NaCl 1 wt%	3 x 5 mL	60	- ^c	0	>99.9	28
5	CH ₂ Cl ₂	H ₂ O	3 x 5 mL	53	71	0	>99.9	98.7
6	CHCl ₃	H ₂ O	3 x 5 mL	34	42	0	>99.9	94
7	CHCl₃	H₂O	1 x 3 mL	20	43	0	81	83
8	Et ₂ O	H ₂ O	3 x 5 mL	15	37	0	40	8
9	MTBE	H ₂ O	3 x 5 mL	29	51	0	68	5
10	toluene	H ₂ O	3 x 5 mL	8	11	0	50	1.6

AcOBu = *n*-butyl acetate, AcOPr = *n*-propyl acetate, Et₂O = diethyl ether, MIBK = methyl isobutyl ketone, MTBE = methyl *tert*-butyl ether. ^a See Supporting Information, section 2.4 for the detailed procedure. ^b Volume = 1 mL. ^c Not determined.

Overall, our methodology not only enabled the purification of glycerol carbonate without vacuum distillation or column chromatography, but was also amenable to the partial recycling and purification of the homogeneous catalyst.

Extension to refined and crude biobased glycerol. Glycerol is a by-product from the soap, fatty acid and biodiesel industries, and there is a significant difference in price between crude and refined glycerol. In 2013-2014, prices of crude and refined glycerol were about 240 USD/ton and 900-965 USD/ton, respectively.³¹ Refined glycerol remains the privileged substrate in the primary literature, but there is a considerable economic interest in the direct upgrading of crude **4a**. In this context, we assessed our conditions on samples of refined and crude biobased glycerol (Table 5). As expected, the sample of refined biobased glycerol afforded conversion (96%) and selectivity (78%) similar to those of the commercial sample utilized for the process optimization (entries 1-2). Samples of crude **4a** containing

various amounts of water, methanol, salts and organic matter (Supporting Information, Tables S4 and S5) yielded the target compound **1a** with a significantly lower conversion (30 and 44%, entries 3 and 4). On the other hand, the selectivity for glycerol carbonate (**1a**) was excellent with the sample from Cargill (98%, entry 3) and good with the sample from Valtris Champlor SAS (71%, entry 4). In the latter case, the lower selectivity could not be ascribed to the formation of volatile side-products, since only **4a** and **1a** were detected by GC/FID.

Water is present in significant amounts in the crude samples of glycerol and most likely influences the reaction in a negative way. It probably (a) competes with the alcohol moieties of **4a** in binding with the anion of the catalyst, (b) hampers the mass transfer between glycerol and the dimethyl carbonate phase (especially in the presence of salts), and (c) hydrolyses glycerol carbonate (**1a**) back into glycerol (**4a**). A consequence of the hydrolysis of **1a** is the formation of CO₂ as a gaseous by-product, decreasing the residence time of the liquid phase within the reactor. An important evolution of gas was indeed released after the back pressure regulator. Methanol is present in low amounts in the samples of crude glycerol assessed and likely does not influence the equilibrium of the reaction significantly. The detrimental effect of water on the conversion of glycerol into glycerol carbonate was also reported by other authors.^{41,52,58,59} To evaluate the significance of **1a** hydrolysis on the outcome of the reaction, several control experiments were performed under the optimized conditions with glycerol carbonate as substrate in the presence of increasing amounts of water (Figure 4 and Table 6). Reacting **1a** with DMC in the absence of water yielded methyl ((2-oxo-1,3-dioxolan-4-yl)methyl) carbonate (**5a**) as the main product (21% yield, entry 1). Increasing the amount of water in the feedstock solution of **1a** from 2.5 to 10 wt% decreased the yield of **5a** from 12% to 0% (entries 2-4).

Table 5. Assessment of biobased glycerol samples for the preparation of glycerol carbonate (**1a**).

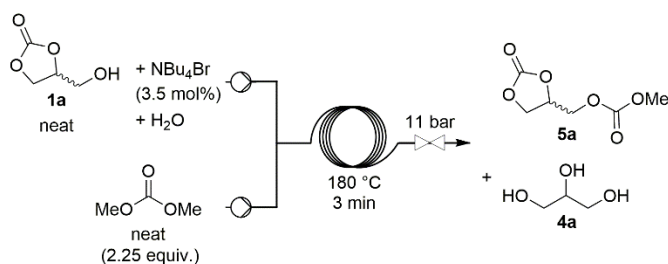
Entry ^a	Glycerol supplier	Glycerol grade (purity)	4a conv. (%) ^b	1a selec. (%) ^b
1	Honeywell	commercial	95	79
2	Cargill	refined		
		biobased (99.5%)	96	78
3	Cargill	crude biobased (85%)	30	98
4	Valtris Champlor SAS	crude biobased (84%)	44	71

^a Process conditions: temperature = 180 °C, residence time = 3 min, 3.5 mol% of NBu₄Br, 2.25 equiv. of DMC, P = 11 bar. ^b Conversion and yield were determined by GC/FID.

Table 6. Assessment of the stability of glycerol carbonate (**1a**) in the presence of dimethyl carbonate and increasing amounts of water.

Entry ^a	Water content (wt%) ^b	1a conv. (%) ^c	5a yield (%) ^c	4a yield (%) ^c
1	0	28	21	0
2	2.5	14	12	0
3	5	4.6	1.2	2.5
4	10	9	0	9
5	20	43	0	43

^a Process conditions are described on Figure 4. ^b Relative to glycerol carbonate. ^c Conversion and yield were determined by GC/FID.

**Fig. 4** Continuous flow setup for the assessment of the stability of glycerol carbonate (**1a**) in the presence of water.

By contrast, increasing the water content from 2.5 wt% to 20 wt% triggered the hydrolysis of **1a** into glycerol up to 43% (entries 2–5). These results suggest that the hydrolysis of **1a** significantly contributes to decreasing the conversion with crude glycerol. Overall, the process would require some reoptimization to attain high conversion of **4a**, but is viable for the upgrading of crude biobased glycerol.

Substrate scope. With the best conditions and catalyst in hand, the scope of the reaction was extended to a large variety of 1,2-diols (Supporting Information, Table S6). Simple 1,3-dioxolan-2-ones, such as propylene (**1c**) and 1,2-butylene (**1d**) carbonates, were obtained with unsatisfactory conversion of the starting material (77 and 79%, respectively). The process conditions were thus slightly adapted. Increasing the DMC/diol molar ratio from 2.25 to 3 gave excellent results on diol **2c** (conv. = 95%, selec. = 98%) and **2d** (conv. = 98%, selec. = 92%). These adapted conditions were next applied to a wide range of 1,2-diols **2b–t** (Figure 5). Liquid diols **2b–d**, **2f–k**, **2m–o** and **2r,s** were processed under neat conditions, while feed solutions of solid diols **2e**, **2l**, **2p**, **2q** and **2t** were prepared in DMSO (1–4 M) to ensure continuous operation.

Very high to excellent yields (82–93%) were obtained for the preparation of 1,3-dioxolan-2-ones of types **1b–e** with increasing carbon chain lengths. 3-Butene-1,2-diol (**2f**), which can be sourced from biobased erythritol,⁶⁰ was somehow less reactive and gave vinyl ethylene carbonate (**1f**) in 68% yield. A twofold increase in the residence time merely improved the yield (71%). The scope also encompassed a wide range of glycerol ethers **2g–l**, which have a promising forecast as versatile renewable building blocks.⁵⁶ Methyl

(**1g**, 91%), *tert*-butyl (**1h**, 86%), allyl (**1i**, 95%), propargyl (**1j**, 78%), furfuryl⁶¹ (**1k**, 85%) and *o*-tolyl (**1l**, 86%) ethers of glycerol carbonate were obtained in high to excellent yields. The preparation of furfuryl ether **1k** in high yield required a longer residence (9 min). Introduction of a dimethylamino or morpholino group vicinal of the 1,2-diol pattern did not alter its reactivity, and carbonates **1m** and **1n** were obtained in 82% and 92% yields, respectively. A previous report utilizing urea as carbonation reagent reported only 15% yield for carbonate **1m**,¹⁹ while another study described the synthesis of compound **1n** in 99% yield upon utilization of DMC as reagent.²⁴ 2,3-Butanediol (**2o**) was found less reactive than the parent 1,2-butanediol (**2d**) under these conditions, and 4,5-dimethyl-1,3-dioxolan-2-one (**1o**) was obtained in 45% yield.²¹ Further increase of the residence time to 6 min slightly increased the yield to 51%. The presence of two secondary alcohols that are not cycle-strained in a relative *cis*-configuration (see below) most likely accounted for the lower reactivity of diol **2o** toward DMC.⁵⁵ *cis*-Cyclohexanediol (**2p**) was converted into the target cyclic carbonate **1p** in good yield (73%). On the other hand, a control experiment on *trans*-cyclohexanediol (**2q**) yielded methyl carbonate **1q** as the main product in 46%, emphasizing that a relative *cis*-configuration is required for the reaction to proceed on cycle-strained diols. An analog observation was made by Beller *et al.* upon reacting *trans*-cyclopentanediol with urea, which yielded the corresponding carbamate as the main product.¹⁹ Biobased anhydroerythritol (**2r**), bearing also a vicinal diol in a relative *cis* configuration, was carbonated into the corresponding bicyclic 1,3-dioxolan-2-one **1r** in excellent 95% yield. Lastly, we considered the preparation of dicarbonate **1s** and **1t** that are potential biobased monomers for polyurethanes.^{3–5,8} Preliminary experiments (Supporting Information, Table S6) on diol **2s** evidenced that a residence time of 9 min was necessary to afford dicarbonate **1s** in good yield (73%). Applying the same conditions to **2t** yielded the hydroxymethylfurfural-derived dicarbonate **1t** in 69%.

In-line NMR monitoring. Real-time analysis for pollution prevention is one of the twelve principles of green chemistry.⁶² In-line NMR has recently emerged as a versatile tool for real-time analytical monitoring of continuous processes.^{21,63} In this context, a low-field in-line benchtop NMR spectrometer was inserted downstream the reactor, and the temperature of the reactor was progressively decreased from 180 to 100 °C. These control experiments were implemented to mimic a possible process failure, and thus evaluate the potential for real-time qualitative process monitoring. The spectra acquired during the carbonation of **2c** into propylene carbonate (**1c**) are depicted on Figure 6. The doublet at 0.8 ppm was used as a probe of the concentration in **2c**, while the doublet at 1.2 ppm and the multiplet at 3.7–4.8 ppm enabled the monitoring of carbonate **1c**. GC/FID was utilized as complementary tool to obtain quantitative results (Supporting Information, Table S6) and similar trends were observed. However, sample preparation and a prolonged analysis time were required for GC/FID, while in-line NMR analysis provided a real-time qualitative monitoring of the

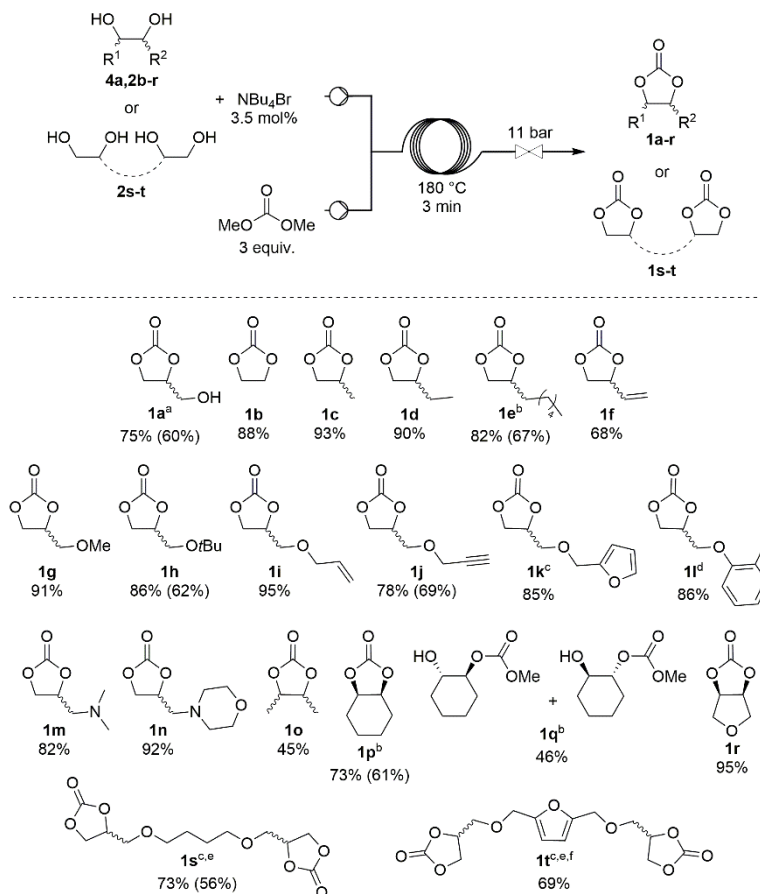


Fig. 5 Substrate scope for the carbonylation of 1,2-diols **4a,2b-t** toward cyclic carbonates **1a-t**. Unless otherwise specified, the diol + catalyst feedstock solution was pumped neat. Yields indicated were determined by GC/FID or by ¹H NMR with mesitylene as the internal standard (isolated yields are indicated in parenthesis). ^a 2.25 equiv. of DMC. ^b The diol was pumped as a 4 M solution in DMSO. ^c Residence time = 9 min. ^d **2l** was pumped as a 3 M solution in DMSO. ^e 3.5 mol% of NBu₄Br and 3 equiv. of DMC per 1,2-diol functional group. ^f **2t** was pumped as a 1 M solution in DMSO.

carbonylation procedure. This approach was also extended to the carbonylation of diols **2b** and **2d** (Supporting Information, Figures S8 and S9).

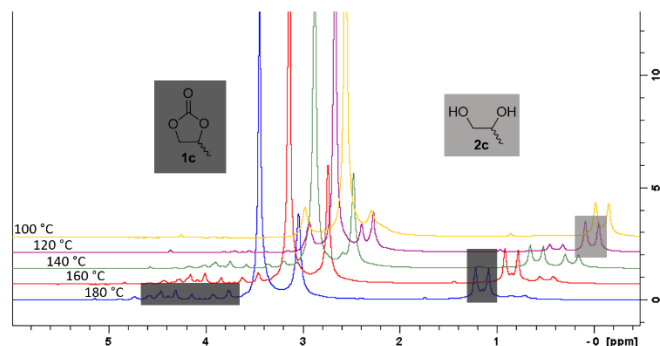


Fig. 6 Representative low-field in-line NMR spectra obtained during the carbonylation of **2c** into **1c** in the 100–180 °C range. The doublet at 0.8 ppm was used to monitor the variation of **2c** concentration (light grey). The doublet at 1.2 ppm and the multiplet at 3.7–4.8 ppm were used to monitor the variation of **1c** concentration (dark grey). Conditions: residence time = 3 min, P = 11 bar, 3.5 mol% of NBu₄Br, 3 equiv. of DMC.

Scale-up. The scalability of this procedure was assessed in a commercial pilot-scale continuous flow reactor (Corning® Advanced Flow™ G1 SiC reactor, Figure 7) of 60 mL internal volume. The

reactor featured 6 silicon carbide (SiC) fluidic modules (FMs) of 10 mL internal volume each, connected in series and integrated with heat exchangers. Glycerol (**4a**) was selected as the model substrate, since **1a** is the most industrially relevant target. The same process conditions as on the microscale (180 °C, 3 min, 3.5 mol% of NBu₄Br, 2.25 equiv. of DMC) were initially applied, and similar results (**4a** conversion = 98%, **1a** selectivity = 74%) were obtained, corresponding to a 9.0 kg day⁻¹ (76.4 mol day⁻¹) productivity in glycerol carbonate (**1a**). In order to further increase the productivity, the residence time was lowered to 2 min, and excellent results were obtained as well (**4a** conversion = 95%, **1a** selectivity = 80%). This data point corresponds to a daily productivity of 115 mol (13.6 kg) in carbonate **1a**, demonstrating the potential transposition to the industrial scale.

Conclusion

This work reports a robust and low-footprint continuous flow procedure for the carbonylation of various 1,2-diols toward 5-membered cyclic organic carbonates (1,3-dioxolan-2-ones). Dimethyl carbonate is utilized as a low-toxicity reagent, and tetrabutylammonium bromide as a cheap and widely available homogeneous catalyst. The conditions feature a low catalytic loading

(3.5 mol%), short reaction times (3–9 min) and solvent-free or highly concentrated media. The reaction conditions were optimized on the model synthesis of glycerol carbonate, affording the target compound in 79% selectivity with 95% conversion. Glycerol carbonate was purified and the homogeneous catalyst was partially recovered by a straightforward liquid-liquid extraction protocol. Refined and crude biobased glycerol were also evaluated as substrates, and promising results were obtained. Control experiments on glycerol carbonate suggested that hydrolysis of glycerol carbonate becomes significant when water is present in the medium at high level. By contrast to the prior Art, the methodology was extended to a wide palette of substrates (20 examples, broad molecular diversity) that were converted in overall good to excellent yields (45–95%). The efficiency of low-field in-line NMR for real-time analytical monitoring of the process was exemplified. The scalability of the procedure for the carbonation of glycerol was next documented in a pilot-scale continuous flow reactor of 60 mL internal volume, and similar results were obtained as on the microscale. The pilot-scale reactor yielded a daily productivity of 115 mol (13.6 kg) of glycerol carbonate.

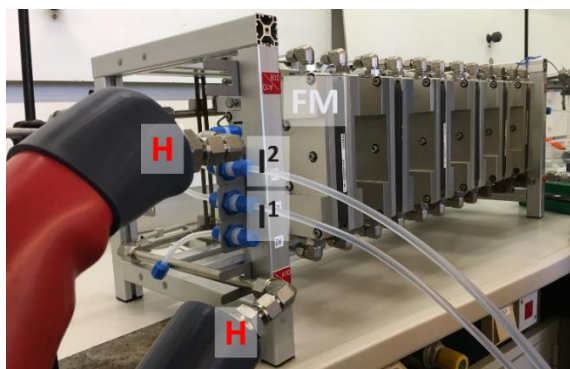


Fig. 7 Photograph of the Corning® Advanced Flow™ G1 SiC reactor. Key: H = inlet and outlet for the heat exchanging fluid; I¹ = inlet for DMC; I² = inlet for preheated glycerol and NBu₄Br; FM = fluidic module.

Conflicts of interest

There are no conflicts to declare.

Acknowledgements

This work was supported by the European Regional Development Fund (ERDF) and Wallonia within the framework of the program “Wallonie-2020.EU” (INTENSE4CHEM, project no. 699993–152208). The authors thank Thomas Toupay for the experimental support. Cargill and Valtris Champlor SAS are gratefully acknowledged for providing biobased glycerol samples.

Notes and references

- 1 J. H. Clements, *Ind. Eng. Chem. Res.*, 2003, **42**, 663–674.
- 2 B. Schäffner, F. Schäffner, S. P. Verevkin and A. Börner, *Chem. Rev.*, 2010, **110**, 4554–4581.
- 3 H. Blattmann, M. Fleischer, M. Bähr and R. Mülhaupt, *Macromol. Rapid Commun.*, 2014, **35**, 1238–1254.

- 4 L. Maisonneuve, O. Lamarzelle, E. Rix, E. Grau and H. Cramail, *Chem. Rev.*, 2015, **115**, 12407–12439.
- 5 J. Datta and M. Włoch, *Polym. Bull.*, 2016, **73**, 1459–1496.
- 6 W. Guo, J. E. Gómez, À. Cristòfol, J. Xie and A. W. Kleij, *Angew. Chem. Int. Ed.*, 2018, **57**, 13735–13747.
- 7 H. Büttner, L. Longwitz, J. Steinbauer, C. Wulf and T. Werner, *Top. Curr. Chem.*, 2017, **375**, 50.
- 8 F. De La Cruz-Martínez, J. Martínez, M. A. Gaona, J. Fernández-Baeza, L. F. Sánchez-Barba, A. M. Rodríguez, J. A. Castro-Osma, A. Otero and A. Lara-Sánchez, *ACS Sustain. Chem. Eng.*, 2018, **6**, 5322–5332.
- 9 G. Sienel, R. Rieth and K. T. Rowbottom, *Epoxides in Ullmann's Encyclopedia of Industrial Chemistry*, Wiley-VCH Verlag GmbH & Co. KGaA, Weinheim, Germany, 2000, DOI: 10.1002/14356007.a09_531.
- 10 N. Kindermann, T. Jose and A. W. Kleij, *Top. Curr. Chem.*, 2017, **375**, 15.
- 11 J.-Y. Li, Q.-N. Zhao, P. Liu, D.-S. Zhang, Q.-W. Song and K. Zhang, *Greenh. Gases Sci. Technol.*, 2018, **8**, 803–838.
- 12 R. S. Hanslick, W. F. Bruce and A. Mascitti, *Org. Synth.*, 1953, **33**, 74–75.
- 13 W. Guerin, A. K. Diallo, E. Kirilov, M. Helou, M. Slawinski, J.-M. Brusson, J.-F. Carpentier and S. M. Guillaume, *Macromolecules*, 2014, **47**, 4230–4235.
- 14 X. M. Yu, H. Han and B. S. J. Blagg, *J. Org. Chem.*, 2005, **70**, 5599–5605.
- 15 S. Böhm and M. Beth-Hübner, *Chloroformic Esters in Ullmann's Encyclopedia of Industrial Chemistry*, Wiley-VCH Verlag GmbH & Co. KGaA, Weinheim, Germany, 2006, DOI: 10.1002/14356007.a06_559.pub2.
- 16 K. M. Engstrom, A. Sheikh, R. Ho and R. W. Miller, *Org. Process Res. Dev.*, 2014, **18**, 488–494.
- 17 D. M. Pearson, N. R. Conley and R. M. Waymouth, *Adv. Synth. Catal.*, 2011, **353**, 3007–3013.
- 18 Y. Chen, C. A. Hone, B. Gutmann and C. O. Kappe, *Org. Process Res. Dev.*, 2017, **21**, 1080–1087.
- 19 M. Peña-López, H. Neumann and M. Beller, *Eur. J. Org. Chem.*, 2016, 3721–3727.
- 20 E. R. Baral, J. H. Lee and J. G. Kim, *J. Org. Chem.*, 2018, **83**, 11768–11776.
- 21 Z. Wang, R. Gérardy, G. Gauron, C. Damblon and J.-C. M. Monbaliu, *React. Chem. Eng.*, 2019, **4**, 17–26.
- 22 K. M. Tomczyk, P. A. Guńka, P. G. Parzuchowski, J. Zachara and G. Rokicki, *Green Chem.*, 2012, **14**, 1749–1758.
- 23 G. D. Yadav and P. S. Surve, *Catal. Sci. Technol.*, 2013, **3**, 2668–2676.
- 24 D. Nakatake, Y. Yokote, Y. Matsushima, R. Yazaki and T. Ohshima, *Green Chem.*, 2016, **18**, 1524–1530.
- 25 P. Tundo, M. Musolino and F. Aricò, *Green Chem.*, 2018, **20**, 28–85.
- 26 G. Fiorani, A. Perosa and M. Selva, *Green Chem.*, 2018, **20**, 288–322.
- 27 M. Selva, A. Perosa, D. Rodríguez-Padrón and R. Luque, *ACS Sustain. Chem. Eng.*, 2019, **7**, 6471–6479.
- 28 J. R. Ochoa-Gómez, O. Gómez-Jiménez-Aberasturi, C. Ramírez-López and M. Belsué, *Org. Process Res. Dev.*, 2012, **16**, 389–399.

- 29 M. O. Sonnat, S. Amigoni, E. P. Taffin de Givenchy, T. Darmanin, O. Choulet and F. Guittard, *Green Chem.*, 2013, **15**, 283–306.
- 30 W. K. Teng, G. C. Ngoh, R. Yusoff and M. K. Aroua, *Energy Convers. Manag.*, 2014, **88**, 484–497.
- 31 P. U. Okoye and B. H. Hameed, *Renew. Sustain. Energy Rev.*, 2016, **53**, 558–574.
- 32 A. Galadima and O. Muraza, *Waste Biomass Valor.*, 2017, **8**, 141–152.
- 33 S. Christy, A. Noschese, M. Lomelí-Rodríguez, N. Greeves and J. A. A. Lopez-Sanchez, *Curr. Opin. Green Sustain. Chem.*, 2018, **14**, 99–107.
- 34 D. Liu and E. Y.-X. Chen, *Green Chem.*, 2014, **16**, 964–981.
- 35 R. Gérardy, N. Emmanuel, T. Tupy, V.-E. Kassin, N. N. Tshibalonza, M. Schmitz and J.-C. M. Monbaliu, *Eur. J. Org. Chem.*, 2018, 2301–2351.
- 36 R. Gérardy, R. Morodo, J. Estager, P. Luis, D. P. Debecker and J.-C. M. Monbaliu, *Top. Curr. Chem.*, 2019, **377**, 1.
- 37 M. G. Álvarez, M. Plíšková, A. M. Segarra, F. Medina and F. Figueras, *Appl. Catal. B Environ.*, 2012, **113–114**, 212–220.
- 38 D. O. Nogueira, S. P. de Souza, R. A. C. Leão, L. S. M. Miranda and R. O. M. A. de Souza, *RSC Adv.*, 2015, **5**, 20945–20950.
- 39 R. A. C. Leão, S. P. de Souza, D. O. Nogueira, G. M. A. Silva, M. V. M. Silva, M. L. E. Gutarra, L. S. M. Miranda, A. M. Castro, I. I. Junior and R. O. M. A. de Souza, *Catal. Sci. Technol.*, 2016, **6**, 4743–4748.
- 40 S. Guidi, R. Calmanti, M. Noè, A. Perosa and M. Selva, *ACS Sustain. Chem. Eng.*, 2016, **4**, 6144–6151.
- 41 S. Van Mileghem, W. M. De Borggraeve and I. R. Baxendale, *Chem. Eng. Technol.*, 2018, **41**, 2014–2023.
- 42 M. A. do Nascimento, L. E. Gotardo, R. A. C. Leão, A. M. de Castro, R. O. M. A. de Souza and I. Itabaiana Jr., *ACS Omega*, 2019, **4**, 860–869.
- 43 For a review on the toxicity of ionic liquids and organic salts, see: K. S. Egorova and V. P. Ananikov, *ChemSusChem*, 2014, **7**, 336–360.
- 44 R. A. Grey, US Pat. 5091543, 1992.
- 45 M. Selva, A. Caretto, M. Noè and A. Perosa, *Org. Biomol. Chem.*, 2014, **12**, 4143–4155.
- 46 C. Chiappe and S. Rajamani, *Pure Appl. Chem.*, 2012, **84**, 755–762.
- 47 M. K. Munshi, P. S. Biradar, S. M. Gade, V. H. Rane and A. A. Kelkar, *RSC Adv.*, 2014, **4**, 17124–17128.
- 48 Z. I. Ishak, N. A. Sairi, Y. Alias, M. K. T. Aroua and R. Yusoff, *Chem. Eng. J.*, 2016, **297**, 128–138.
- 49 E. Elhaj, H. Wang and Y. Gu, *Mol. Catal.*, 2019, **468**, 19–28.
- 50 Y. Yi, Y. Shen, J. Sun, B. Wang, F. Xu and R. Sun, *Chin. J. Catal.*, 2014, **35**, 757–762.
- 51 X. Wang, P. Zhang, P. Cui, W. Cheng and S. Zhang, *Chin. J. Chem. Eng.*, 2017, **25**, 1182–1186.
- 52 S. M. Gade, M. K. Munshi, B. M. Chherawalla, V. H. Rane and A. A. Kelkar, *Catal. Commun.*, 2012, **27**, 184–188.
- 53 M. K. Munshi, S. M. Gade, V. H. Rane and A. A. Kelkar, *RSC Adv.*, 2014, **4**, 32127–32133.
- 54 Y. Zhou, F. Ouyang, Z.-B. Song, Z. Yang and D.-J. Tao, *Catal. Commun.*, 2015, **66**, 25–29.
- 55 M. Selva, M. Noè, A. Perosa and M. Gottardo, *Org. Biomol. Chem.*, 2012, **10**, 6569–6578.
- 56 M. Sutter, E. Da Silva, N. Duguet, Y. Raoul, E. Métaay and M. Lemaire, *Chem. Rev.*, 2015, **115**, 8609–8651.
- 57 J. R. Ochoa-Gómez, O. Gómez-Jiménez-Aberasturi, C. Ramírez-López and B. Maestro-Madurga, *Green Chem.*, 2012, **14**, 3368–3376.
- 58 V. P. Indran, A. S. H. Saud, G. P. Maniam, Y. H. Taufiq-Yap and M. H. A. Rahim, *Waste Biomass Valor.*, 2017, **8**, 1049–1059.
- 59 M. Tudorache, A. Nego, B. Tudora and V. I. Parvulescu, *Appl. Catal. B Environ.*, 2014, **146**, 274–278.
- 60 N. N. Tshibalonza, R. Gérardy, Z. Alsafr, G. Eppe and J.-C. M. Monbaliu, *Green Chem.*, 2018, **20**, 5147–5157.
- 61 E. Dolci, G. Michaud, F. Simon, B. Boutevin, S. Fouquay and S. Caillol, *Polym. Chem.*, 2015, **6**, 7851–7861.
- 62 P. T. Anastas and J. C. Warner, *Green chemistry: theory and practice*, Oxford University Press, New York, 1998.
- 63 P. Giraudeau and F.-X. Felpin, *React. Chem. Eng.*, 2018, **3**, 399–413.