



A meta-analysis and statistical modelling of nitrates in groundwater at the African scale

Issoufou Ouedraogo and Marnik Vanclooster

Earth and Life Institute, Université catholique de Louvain, Croix du Sud 2, Box 2, B-1348 Louvain-la-Neuve, Belgium

Correspondence to: Issoufou Ouedraogo (ouediss6@yahoo.fr)

Received: 9 March 2016 – Published in Hydrol. Earth Syst. Sci. Discuss.: 14 March 2016

Revised: 20 May 2016 – Accepted: 25 May 2016 – Published: 17 June 2016

Abstract. Contamination of groundwater with nitrate poses a major health risk to millions of people around Africa. Assessing the space–time distribution of this contamination, as well as understanding the factors that explain this contamination, is important for managing sustainable drinking water at the regional scale. This study aims to assess the variables that contribute to nitrate pollution in groundwater at the African scale by statistical modelling. We compiled a literature database of nitrate concentration in groundwater (around 250 studies) and combined it with digital maps of physical attributes such as soil, geology, climate, hydrogeology, and anthropogenic data for statistical model development. The maximum, medium, and minimum observed nitrate concentrations were analysed. In total, 13 explanatory variables were screened to explain observed nitrate pollution in groundwater. For the mean nitrate concentration, four variables are retained in the statistical explanatory model: (1) depth to groundwater (shallow groundwater, typically < 50 m); (2) recharge rate; (3) aquifer type; and (4) population density. The first three variables represent intrinsic vulnerability of groundwater systems to pollution, while the latter variable is a proxy for anthropogenic pollution pressure. The model explains 65 % of the variation of mean nitrate contamination in groundwater at the African scale. Using the same proxy information, we could develop a statistical model for the maximum nitrate concentrations that explains 42 % of the nitrate variation. For the maximum concentrations, other environmental attributes such as soil type, slope, rainfall, climate class, and region type improve the prediction of maximum nitrate concentrations at the African scale. As to minimal nitrate concentrations, in the absence of normal distribution assumptions of the data set, we do not develop a statistical model for these data. The data-based statistical

model presented here represents an important step towards developing tools that will allow us to accurately predict nitrate distribution at the African scale and thus may support groundwater monitoring and water management that aims to protect groundwater systems. Yet they should be further refined and validated when more detailed and harmonized data become available and/or combined with more conceptual descriptions of the fate of nutrients in the hydrosystem.

1 Introduction

Nitrate contamination of groundwater is a common problem in many parts of the world. Elevated nitrate concentrations in drinking water can cause methemoglobinemia in infants and stomach cancer in adults (Yang et al., 1998; Knobeloch et al., 2000; Hall et al., 2001). As such, the World Health Organization (WHO) has established a maximum contaminant level (MCL) of $50 \text{ mg L}^{-1} \text{ NO}_3$ (WHO, 2004). Nitrate in groundwater is generally of anthropogenic origin and associated with leaching of nitrogen from agriculture plots or from waste and sewage sanitation systems. The heavy use of nitrogenous fertilizers in cropping systems is the largest contributor to anthropogenic nitrogen in groundwater worldwide (Suthar et al., 2009). In particular, shallow aquifers in agricultural fields are highly vulnerable to nitrate contamination (Böhlke, 2002; Kyoung-Ho et al., 2009). According to Spalding and Exner (1993), nitrate may be the most widespread contaminant of groundwater.

In Africa, groundwater is recognized as playing a very important role in the development agenda. According to Xu and Usher (2006), degradation of groundwater is the most serious water resource problem in Africa. The two main

threats are overexploitation and contamination (MacDonald et al., 2013). Indeed, based on a review of 29 papers from 16 countries, Xu and Usher (2006) identified major groundwater pollution issues in Africa, considering the order of importance as follows: (1) nitrate pollution, (2) pathogenic agents, (3) organic pollution, (4) salinization, and (5) acid mine drainage. These authors have shown that the major sources of groundwater contamination are related to on-site sanitation, to the presence of solid waste dumpsites, including household waste pits, to infiltration of surface water, to agricultural activities, to the presence of petrol service stations (underground storage tanks), and to the mismanagement of well fields. Nitrate contamination of groundwater is a problem that commonly occurs in Africa, as illustrated in the studies for Algeria (Rouabhi et al., 2010; Messameh et al., 2014), Tunisia (Hamza et al., 2007; Anane et al., 2014), Morocco (Bricha et al., 2007; Fetouani et al., 2008; Benabbou et al., 2014), Senegal (Sall and Vanclooster, 2009; Diédhiou et al., 2012), Ivory Coast (Loko et al., 2013a; Eblin et al., 2014), Ghana (Tay and Kortatsi, 2008; Fianko et al., 2009), Nigeria (Wakida and Lerner, 2005; Akoteyon and Soladoye, 2011; Obinna et al., 2014), South Africa (Maherry et al., 2009; Musekiwa and Majola, 2013), Ethiopia (BGS, 2001a; Bonetto et al., 2005), and Zambia (Wakida and Lerner, 2005). Several of these studies showed that pollution from anthropogenic activities is the main source of high and variable nitrate levels. For example, Comte et al. (2012) illustrate that the groundwater situated in the Quaternary sandy aquifer of the peninsula of Dakar is under strong anthropogenic pressure from the city of Dakar, resulting in important nitrate loadings. Such contamination problems are often retrieved in many metropolises in Africa. Notwithstanding the availability of all these studies at the local, regional or country level, no comprehensive synthesis of nitrate contamination of groundwater at the scale of the African continent has been presented in the literature. Assessing large-scale groundwater contamination with nitrates is important for the planning of the large-scale groundwater exploitation programmes and for designing transboundary water management policies. It also yields important baseline information for monitoring progress in the implementation of the United Nations Sustainable Development Goals (UN SDGs) for water. According to Saruchera and Lautze (2015), transboundary water cooperation has emerged as an important issue in the post-2015 UN SDGs. This study will increase awareness of citizens, international agencies and authorities (e.g. FAO, UNEP, and OECD; Water Sanitation for Africa – WSA) of the environmental factors likely to be significant in groundwater contamination. However, making an appropriate African-scale synthesis of nitrate contamination of groundwater remains a scientific and technical challenge, given the heterogeneity of the nitrate monitoring programmes and the absence of administrative and institutional capacity to collect and diffuse the data at the African scale. A concept that partially helps to solve this urgent data management problem is that

of groundwater vulnerability. Groundwater vulnerability for nitrate contamination is an expression of the likelihood that a given groundwater body will be negatively affected by nitrate contamination. Given that the vulnerability is a likelihood, it is only an expression of the potential degradation of groundwater and hence a proxy of groundwater contamination by nitrates. Groundwater vulnerability can be assessed based on available generic data. It therefore does not depend on a strong and operational Africa groundwater quality monitoring capacity. In this paper, we propose and implement a methodology for assessing the vulnerability of groundwater contamination by nitrates at the African scale. We further consider nitrate in this study as a proxy for overall groundwater pollution, which is consistent with the view of the US EPA (EPA, 1996).

In general, there are three categories of models for the assessment of groundwater vulnerability: (1) index methods or subjective rating methods, (2) statistical methods and (3) process-based modelling methods. Index-and-overlay methods are one set of subjective rating methods that utilize the intersection of regional attributes with the qualitative interpretation of data by indexing parameters and assigning a weighting scheme. The most widely used index method is DRASTIC (Aller et al., 1985). Unfortunately, index methods are based on subjective rating methods (Focazio et al., 2002) and should preferably be calibrated using measured proxies of vulnerability (Kihumba et al., 2015; Ouedraogo et al., 2016). When a groundwater monitoring data set is available, formal statistical methods can be used to integrate groundwater contamination data directly into the vulnerability assessment. Finally, process-based methods refer to approaches that explicitly simulate the physical, chemical and biological processes that affect contaminant behaviour in the environment. They comprise the use of deterministic or stochastic process-simulation models eventually linked to physically based field observations (e.g. Coplen et al., 2000). Physically process-based methods are typically applied at small scales, mostly to define well protection zones, rather than to assess groundwater vulnerability at broader scales (Frind et al., 2006). A well-known example is the use of a physically based groundwater model (e.g. MODFLOW; Harbaugh et al., 2000) that solves the governing equations of groundwater flow and solute transport. Such models have explicit time steps and are often used to determine the timescales of contaminant transport to wells and streams, in addition to the effects of pumping. However, they also have many parameters that require estimation. In this paper, we use statistical models to assess the vulnerability of groundwater systems to nitrate pollution.

Formal statistical methods have often been employed to assess the vulnerability of groundwater at national and regional scales. They are also often used to discriminate contaminant sources and to identify factors contributing to contamination (Kolpin, 1997; Nolan and Hitt, 2006). Many authors used multiple linear regression (MLR) techniques. For

example, Bauder et al. (1993) investigated the major controlling factors for nitrate contamination of groundwater in agricultural areas using MLR of land uses, climate, soil characteristics, and cultivation types. MLR was also used to relate pesticide concentrations in groundwater to the age of the well, land use around the well, and the distance to the closest possible source of pesticide contamination (Steichen, et al., 1988). Boy-Roura et al. (2013) used MLR to assess nitrate pollution in the Osona region (north-eastern Spain). Amini et al. (2008a, b) used MLR and an adaptive neuro-fuzzy inference system (ANFIS), a general non-linear regression technique, to study the global geogenic fluoride contamination in groundwater and the global geogenic arsenic contamination in groundwater respectively. MLR has the strong advantage that regression coefficients can directly be interpreted in terms of the importance of explaining factors. Many studies linking nitrate occurrence in groundwater to spatial variables have employed logistic regression (Hosmer and Lameshow, 1989; Eckhardt and Stackelberg, 1995; Tesoriero and Voss, 1997; Gardner and Vogel, 2005; Winkel et al., 2008; Mair and El-kadi, 2013). According to Kleinbaum (1994), MLR is conceptually similar to logistic regression. Other authors have used more sophisticated approaches such as Bayesian methods (Worrall and Besien, 2005; Mattern et al., 2012) and, more recently, classification and regression tree modelling approaches (Burow et al., 2010; Mattern et al., 2012). However, to our knowledge, a statistical model of groundwater nitrate contamination at the African scale does not exist yet.

In the present study, we used MLR techniques to assess the vulnerability of nitrate groundwater pollution at the African scale. To this end, we compiled at the African-scale groundwater a pollution database from the literature and combined it with environmental attributes inferred from a generic database. The generic database was developed in a former study to assess vulnerability using the DRASTIC index method (Ouedraogo et al., 2016). MLR models were subsequently identified to explain quantitatively the log transformed observed nitrate contamination in terms of generic environmental attributes and, finally, the regression models were interpreted in terms of characteristics of contaminant sources and hydrogeology of the African continent.

2 Study area

We studied the vulnerability of groundwater systems for nitrate contamination at the scale of the African continent. Groundwater is Africa's most precious natural resource, providing reliable water supplies to at least a third of the continent's population (MacDonald, 2010). However, the African continent is not blessed with a large quantity of groundwater resources, because it is the world's second-driest continent after Australia and water resources are limited. MacDonald

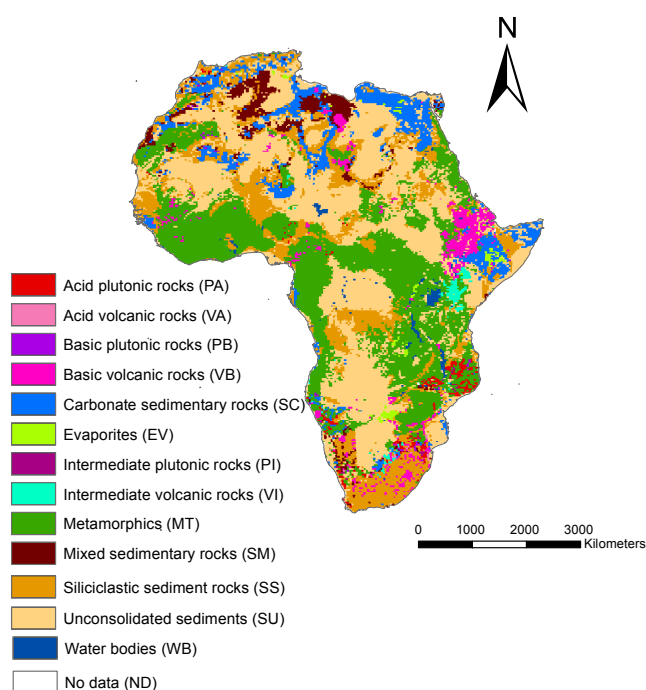


Figure 1. Hydrogeological setting of the African continent (from Hartmann and Moosdorf, 2012).

et al. (2012) have estimated the volume of groundwater resources in Africa at 0.66 million km³.

Africa has a vast array of drainage networks; the most important ones are the following: the Nile River, which drains north-east and empties into the Mediterranean Sea. The Congo River drains much of central Africa and empties into the Atlantic Ocean. The Niger River is the principal river of western Africa; it is the third-longest river after the Nile and the Congo River, and empties into the Atlantic Ocean. Southern Africa is drained by the Zambezi River. Lake Chad constitutes one of the largest inland drainage areas of the continent. Other major lakes located in the east of Africa include Lake Tanganyika and Lake Victoria.

The elevation of Africa varies from below sea level to 5825 m above sea level. The average elevation is approximately 651 m (Ateawung, 2010). The geology of the African continent contains 13 lithological classes (Fig. 1) with varying coverages: evaporites (0.6 %), metamorphic rocks (27.6 %), acid plutonic rocks (1.1 %), basic plutonic rocks (0.2 %), intermediate plutonic rocks (0.1 %), carbonate sedimentary rocks (9.4 %), mixed sedimentary rocks (6.4 %), siliciclastic sedimentary rocks (16.4 %), unconsolidated sediments (35.1 %), acid volcanic rocks (0.1 %), basic volcanic rocks (3.3 %), intermediate volcanic rocks (0.6 %) and water bodies (0.9 %) (Hartmann and Moosdorf, 2012). The lithology describes the geochemical, mineralogical and physical properties of rocks.

Table 1. Criteria used to identify nitrate data studies within web databases.

Search engine	Search criteria
Google, Google Scholar, and Google Books	Groundwater pollution + Africa Nitrate in groundwater + “African country name” or “African capital city name” Groundwater quality + Africa Nitrate and agricultural practices in Africa Groundwater vulnerability + “African country name” Pollution des eaux souterraines par les nitrates + “nom du pays Africain” (in French) Pollution des eaux souterraines + “nom du pays Africain” (in French) Nitrate concentrations under irrigated agriculture + “African country name”
Web of Sciences, Scopus, and Sciences Direct	Groundwater pollution by nitrate + “African country name” Nitrate in groundwater + “Africa capital city name” Pollution des eaux souterraines par les nitrates + “nom du capital des pays” (in French) Groundwater contamination by nitrate + “Africa countries” or “African capital city name” Africa irrigated agriculture + nitrate Groundwater contamination by nitrate + “Africa country name” or “African capital city name” Nitrate concentrations under irrigated agriculture + “African country name” Groundwater vulnerability to nitrate contamination + “Africa country name” or “African capital city name”
Books	Groundwater pollution in Africa (Xu and Usher, 2006)

(15 km × 15 km) at the 1 : 60 000 000 scale. This spatial resolution was chosen because we have considered that it was a reasonable compromise between different resolutions of the different data sets computing constraints and regional extent. Indeed, this grid cell dimension has been used to map the vulnerability and risk pollution maps at the African scale (Ouedraogo et al., 2016). Generic variables at the grid scale were extracted to build our explanatory variables in this study. Most of these variables were categorical, but some were continuous.

Groundwater recharge is considered a primary explaining variable because recharge is the primary vehicle by which a contaminant is transported from the ground surface to groundwater. Groundwater recharge to an unconfined aquifer is a function of precipitation, runoff, and evapotranspiration. The latter is related to vegetation and/or soil type. Groundwater recharge to a confined aquifer is generally more complex, as consideration must be given to the location of the recharge zone and the influence of any confining layers, vertical gradients, and groundwater pumping (Todd Engineers and Kennedy/Jenks Consultants, 2010). In this study, we derived the African recharge map from the global-scale groundwater recharge model of Döll et al. (2008). We also considered independent climate data as alternative proxies of recharge. Hence, we considered the climate and region type data class as defined by Trambauer et al. (2014). We also considered the rainfall map as generated from the UNEP/FAO World and Africa GIS database. The spatial resolution of this latter data set is approximately 3.7 km.

Subsequently, we selected a set of environmental attributes related to aquifer type, groundwater position, and the substrate that protects the aquifer. The depth to groundwater rep-

resents the distance that a contaminant must travel through the unsaturated zone before reaching the water table or to the first screen. We mapped the depth to water based on the data presented by Bonsor et al. (2011). The slope of the land surface is important with respect to groundwater vulnerability because it determines the potential of a contaminant to infiltrate into the groundwater or be transported horizontally as runoff. We inferred the slope from the 90 m Shuttle Radar Topography Mission (SRTM90) topographic map, using the Spatial Analyst software of ArcGIS10.2™. We derived the aquifer type and the impact of vadose zone material from the high-resolution global lithological database (GliM) of Hartmann and Moosdorf (2012). We determined aquifer type and unsaturated lithological zone for each of the five hydro-lithological and lithological categories as defined by Gleeson et al. (2014). These categories are unconsolidated sediments, siliciclastic sediments, carbonate rocks, crystalline rocks, and volcanic rocks (Gleeson et al., 2014). We constructed the soil type map from the 1 km resolution soil grid database developed by Hengl et al. (2012). We determined the hydraulic conductivity of aquifers from the Global Hydrogeology MaPS (GHYMPS) data set (Gleeson et al., 2014). For the determination of the land use at the African scale, we used the high-resolution land cover/land use map from the GlobCover data set (Defourny et al., 2014). There are twenty-two (22) classes of land cover that represent Africa in this data set. We aggregated these 22 classes into 6 similar classes (water bodies, bare area, grassland/shrubland, forest, urban, croplands) as represented in Fig. 4 and then re-grouped them into 5 groups (water bodies, forest/bare area, grassland/shrubland, croplands, urban area).

Table 2. Localization of study sites considered in the meta-analysis.

Country	Localization	Number of studies per country	References
Algeria	North-eastern Algeria Ouargla phreatic aquifer in Algeria: Valley of OuedM'y a Nord-Algerian aquifer (Mitidija) Medja area Biskra Case Skikda El Eulma Mostaganem, Mecheria, Naama, Tiaret, Bechar, and Adrar Southern Hodna Tlemcen Merdja plain	11	Labar et al. (2012a) Semar et al. (2013) Sbargoud (2013) Rouabhia et al. (2010) Messameh et al. (2014) Labar et al. (2012b) Belkhiri and Mouni (2012) Bahri and Saibi (2012) Abdesselam et al. (2012) Abdelbaki et al. (2013) Rouabhia et al. (2009)
Angola	Angola	1	Angola Water Works (2013)
Benin	Cotonou Beninese coastal basin Municipality of Pobè Dongo-pont Cotonou Cotonou	6	Totin et al. (2013) Totin et al. (2010) Lagnika et al. (2014) Bossa et al. (2012) BGS (2003b) Xu and Usher (2006)
Bostwana	Rural Bostwana Kalahari Eastern fringe of the Kalahari near Serowe	3	Batisani (2012) Stadler et al. (2004) Stadler et al. (2008)
Burkina Faso	Burkina Faso Burkina Faso Sourou Valley Ouagadougou	4	BGS (2002) Pavelic et al. (2012) Rosillon et al. (2012) Xu and Usher (2006)
Cameroon	Mingoa River basin/Yaounde Bafoussam Coastal zone of Cameroon/Douala Logon Valley/Chad–Cameroon Anga's river Rio del Rey Basin/south-western coast Mingoa/Yaounde catchment Two areas of Cameroon and Chad in the Lake Chad basin Dschang municipality Cameroon	10	Tabue et al. (2012) Mpakam et al. (2009) Nougang et al. (2011) Sorlini et al. (2013) Kuitcha et al. (2013) Wotany et al. (2013) Tabue et al. (2009) Ngatcha and Daira (2010) Temgoua (2011) Xu and Usher (2006)
Central African Republic	Bangui area	1	Djebebe-Ndjiguim et al. (2013)
Congo–Brazzaville	Brazzaville Brazzaville South-eastern Brazzaville South-eastern Brazzaville South-western Brazzaville	5	Matini et al. (2012) Barhe and Bouaka (2013) Laurent et al. (2010) Laurent and Marie (2010) Matini et al. (2009)
Egypt	Alexandria Helwan Nile Valley Tahta Kafr Al-Zayet district Nile Delta aquifers/western Nile Delta Cairo, Egypt/province of Giza	7	Abd El-Salam and Abu-Zuid (2014) Abdalla and Scheytt (2012) Abdel-Lah and Shamrukh (2001) Easa and Abou-Rayan (2010) Masoud (2013) Sharaky et al. (2007) Sadek and El-Samie (2001)

Table 2. Continued.

Ethiopia	Dire Dawa	13	Abate (2010)
	Ethiopia		BGS (2001a)
	Raya Valley		Bushra (2011)
	Adis Ababa		Engida (2001)
	Addis Ababa		Kahssay et al. (2010)
	Koraro/Tigray		Nedaw (2010)
	Ethiopia		Pavelic et al. (2012)
	Bulbule and Zway		Bonetto et al. (2005)
	Haromaya watershed, eastern Ethiopia		Tadesse et al. (2010)
	Akaki		Tegegn (2012)
	Adis Ababa		Xu and Usher (2006)
	Dire Dawa of Sabian area		Tilahun and Merkel (2010)
	Wondo Genet district, southern Ethiopia		Haylamicheal and Moges (2012)
Ghana	Ga East	14	Ackah et al. (2011)
	Sawla-Tuna-Kalba district		Cobbina et al. (2012)
	Akatsi, Adidome, and Ho districts		Ansa-Asare et al. (2009)
	Ghana		BGS (2000a)
	Six districts in the eastern region of Ghana		Fianko et al. (2009)
	Kwahu West district		Nkansah et al. (2010)
	Ga East district of Accra (Taifa)		Nyarko (2008)
	Ghana		Obuobie and Barry (2010)
	Ghana		Pavelic et al. (2012)
	Densu basin		Tay and Kortatsi (2008)
	Contamination in Ghana		Xu and Usher (2006)
	Western region of Ghana		Affum et al. (2015)
	Gold mining area in Ghana/Tarkwa		Armah et al. (2012)
	Lower Pra basin of Ghana		Armah (2010)
Guinea-Bissau	Boloma	1	Bordalo and Savva-Bordalo (2007)
Ivory Coast	Bonoua	16	Abenan et al. (2012)
	Bondoukou region		Ahoussi et al. (2012)
	Bonoua aquifer (south-eastern Ivory Coast)		Ake et al. (2010)
	Abidjan district		Douagui et al. (2012)
	Adiaké region		Eblin et al. (2014)
	Abidjan and Korhogo		Kouame et al. (2013)
	Abidjan aquifer		Xu and Usher (2006)
	South-western Ivory Coast		Yao et al. (2013)
	N'zi-Comoé (central eastern Ivory Coast)		Kouassi et al. (2010)
	Guiglo-Douekoué (western Ivory Coast)		Kouassi et al. (2012)
	N'zi, N'Zianouan municipality (southern Ivory Coast)		Ahoussi et al. (2012)
	Bandama basin at Tortiya (northern Ivory Coast)		Drissa et al. (2013)
	Abia Koumassi village/Abidjan		Loko et al. (2013a)
Kenya	Slums of Anoumabo (Marcory) and Adjouffou Port-Bouet	4	Osemwegie et al. (2013)
	Catchment Ehania, south-eastern Ivory Coast		Dibi et al. (2013)
	Hiré, south-western Ivory Coast		Loko et al. (2013b)
Kenya	Kisaumi, Mombasa	1	Xu and Usher (2006)
Libya	North-eastern Libya	3	Nair et al. (2006)
	Alshati		Salem and Alshergawi (2013)
	North-eastern Jabal Al Hasawnah		Sanok et al. (2014)
Malawi	Lake Chilwa basin	4	Xu and Usher (2006)
	Chikhwawa		Grimason et al. (2013)
	Upper Limphasa River/Nkhata-Bay district		Kanyerere et al. (2012)
	Blantyre		Mkandawire (2008)

Table 2. Continued.

Mali	Bamako Mali Timbuktu	3	Xu and Usher (2006) Pavelic et al. (2012) Cronin et al. (2007)
Mauritania	Mauritania	1	Friedel (2008)
Morocco	Oued Taza Taldla plain Marrakesh Meknès region Oum Azza of Rabat Phreatic aquifer of M'nasra Taldla plain Mzamza-Chouia Berrechid plain Taldla plain Triffa plain Triffa plain Essaouira Basin Phreatic aquifer of Martil Casablanca Souss-Massa basin (south-western Morocco)	16	Ben Abbou et al. (2014) Aghzar et al. (2002) Alaoui et al. (2008) Belghiti et al. (2013) Benabbou et al. (2014) Bricha et al. (2007) El Hammoumi et al. (2013) Asslouj et al. (2007) El Bouqdaoui et al. (2009) El Hammoumi et al. (2012) Fekkoul et al. (2011) Fetouani et al. (2008) Laftouhi et al. (2003) Lamribah et al. (2013) Smahi (2013) Tagma et al. (2009)
Mozambique	Lichinga Maputo	2	Cronin et al. (2007) Muiuane (2007)
Niger	Niamey Niamey Niamey	3	Chippaux et al. (2002) Hassane (2010) Abou (2000)
Nigeria	Uzouwani (south-eastern Nigeria) Lagos Ondo State South-western Abeokuta Lagos Lagos-State Nigeria Konduga Abuja Nigeria Edo State/South South Jimeta-Yola (north-eastern Nigeria) Eastern Niger Delta Anambra State Lagos Afikpo basin Benue State Nigeria Niger Delta Igbokoda, south-western Nigeria Lagos Nigeria Abia state Eti-Osa, Lagos	24	Ekere (2012) Adelekan and Ogunde (2012) Akinbile (2012) Aladejana and Talabi (2013) Anthony (2012) Balogun et al. (2012) BGS (2003a) Dammo et al. (2013) Dan-Hassan et al. (2012) Edet et al. (2011) Imoisi et al. (2012) Ishaku (2011) Nwankwoala and Udom (2011) Obinna et al. (2014) Ojuri and Bankole (2013) Omoboriowo et al. (2012) Ornguga (2014) Palevlic et al. (2012) Rim-Rukeh et al. (2007) Talabi (2012) Wakida and Lerner (2005) Xu and Usher (2006) Obi and George (2011) Akoteyon and Soladoye (2011)
Republic Democratic of Congo	Kahuzi-Biega Nationals Parks Kinshasa	2	Bagalwa et al. (2013) Longo (2009)

Table 2. Continued.

Senegal	Dakar region	7	Brandvold (2013)
	Thiaroye		Madioune et al. (2011)
	Niayes region		Sall and Vanclooster (2009)
	Dakar		Wakida and Lerner (2005)
	Dakar		Xu and Usher (2006)
	Dakar		Diédhiou et al. (2012)
	Yeumbeul/Dakar		BGS (2003b)
Somalia	Somaliland and Puntland	1	FAO-SWALIM (2012)
South Africa	South Africa	6	Maherry et al. (2009)
	Philippi/Western Cape		Aza-Gnandji et al. (2013)
	Mpumalanga Province		Mpenyana-Monyatsi and Momba (2012)
	South Africa		Musekiwa and Majola (2013)
	South Africa		Pavelic et al. (2012)
	Hex River Valley; Sandveld; Hertzogville		Xu and Usher (2006)
Sudan	Southern suburb of the Ondurman	5	Abdellah et al. (2013)
	Khartoun		Ahmed et al. (2000)
	Karray		Salim et al. (2014)
	Karray		Taha (2010)
	Khartoum		Idriss et al. (2011)
Tanzania	Tanzania	8	BGS (2000b)
	Dar es Salaam		De Witte (2012)
	Dodoma		Kashaigili (2010)
	Kilimanjaro region		McKenzie et al. (2010)
	Dar es Salaam		Mjemah (2013)
	Dar es Salaam		Mtoni et al. (2013)
	Tanzania		Palevlic et al. (2012)
	Temekedistrict/Dar es Salaam		Napacho and Manyele (2010)
Chad	N'djamena	3	Guideal et al. (2010)
	Lake Chad basin		Seeber et al. (2014)
	Chad basin		Ngatcha and Daira (2010)
Togo	Agoè-Zongo	2	Kissao and Housséni (2012)
	Gulf/southern Togo		Mande et al. (2012)
Tunisia	North-eastern Tunisia (Korba aquifer)	8	Zghibi et al. (2013)
	Cap Bon		Anane et al. (2014)
	Cap Bon		Charfi et al. (2013)
	Djebeniana		Fedrigoni et al. (2001)
	Metline-Ras Jebel-Raf Raf/north-east		Hamza et al. (2007)
	Sfax-Agareb		Hentati et al. (2011)
	El Khairat aquifer		Ketata et al. (2011)
	Chaffar/south of Sfax		Smida et al. (2010)
Uganda	Uganda	2	BGS (2001b)
	Kampala/Bwaise III		Kulabako et al. (2007)
Zambia	Petauke	4	Mbewe (2013)
	John Laing and Misisi de Lusaka		Xu and Usher (2006)
	Copperbelt Province/North-Western Province; Lusaka Province;		Nachiyunde et al. (2013)
	Central Province; Southern Province		
	Lusaka		Wakida and Lerner (2005)
Zimbabwe	Kamangara	2	Dzwairo et al. (2006)
	Epworth at Harare		Zingoni et al. (2005)

Table 3. Explanatory variables used in the MLR analysis.

Explanatory variables	Type	Units or categories	Spatial resolution/scale	Date	Data source(s)
Land cover/land use	Categorical data	–	300 m	2014	¹ UCL/ELIe-Geomatics (Belgium)
Population density	Continuous point data	people km ⁻²	2.5 km	2004	ESRI: www.arcgis.com/home
Nitrogen application	Continuous point data	kg ha ⁻¹	0.5° × 0.5°	2009	² SEDAC: www.sedac.ciesin.columbia.edu
Climate class data	Categorical data	–	0.5°	1997	Global-Aridity values (UNEP, 1987)/ (UNESCO-IHE, Delft, the Netherlands)
Type of regions	Categorical data	–	0.5°	2014	Global-Aridity values (UNEP, 1987)/ (UNESCO-IHE, Delft, the Netherlands)
Rainfall class	Categorical data	mm yr ⁻¹	3.7 km	1986	UNEP: http://www.grid.unep.ch
Depth to groundwater	Categorical data	m	0.5° × 0.5°	2012	British Geological Survey: www.bgs.ac.uk/
Aquifer type	Categorical data	–	1 : 3 750 000	2012	³ GLiM data (Hamburg University)
Soil type	Categorical data	–	1 km × 1 km	2014	ISRIC, World Soil Information: www.isric.org/content/soilgrids
Unsaturated zone (impact of vadose zone)	Categorical data	–	1 : 3 750 000	2012	GLiM data (Hamburg University)
Topography/slope	Continuous point data	Percentage (%)	90 m	2000	UCL/ELIe-Geomatics (Belgium) and ⁴ CGIAR/CSI
Recharge	Continuous point data	mm yr ⁻¹	5 km	2008	Global-scale modelling of groundwater recharge (University of Frankfurt)
Hydraulic conductivity	Continuous point data	m d ⁻¹	Average size of polygon ~ 100 km ²	2014	⁵ GLHYMPS data (McGill University)

¹ Université Catholique de Louvain/Earth and Life Institute/Environmental sciences;² Socioeconomic Data and Applications Center (SEDAC);³ The new global lithological map database – GLiM: a representative of rock properties at the earth's surface;⁴ Consultative Group for International Agricultural Research (CGIAR)/Consortium for Spatial Information (CSI);⁵ A glimpse beneath the earth's surface: Global Hydrogeology MaPS (GLHYMPS) of permeability and porosity.**Table 4.** Summary statistics of original and log (ln) transformed nitrate data.

Statistic	Maximum NO ₃ ⁻ concentration	Maximum ln(NO ₃ ⁻) concentration	Mean NO ₃ ⁻ concentration	Mean ln(NO ₃ ⁻) concentration	Minimum NO ₃ ⁻ concentration	Minimum ln(NO ₃ ⁻) concentration
Number of data (–)	206	206	82	82	185	185
Minimum (mg L ⁻¹ or ln(mg L ⁻¹))	0.08	–2.52	1.26	0.231	0	0
Maximum (mg L ⁻¹ or ln(mg L ⁻¹))	4625	8.43	648	6.473	180	5.19
Median (mg L ⁻¹ or ln(mg L ⁻¹))	73.64	4.29	27.58	3.317	0.55	0.43
Mean (mg L ⁻¹ or ln(mg L ⁻¹))	190.05	3.99	54.85	3.169	8.91	1.08
Variance ((mg L ⁻¹) ² or ln(mg L ⁻¹) ²)	183778.94	3.39	163.92	43.901	537.07	1.78
CV (–)	225.56	46.18	8085.08	1.935	260.08	123.04
Standard deviation (mg L ⁻¹ or ln(mg L ⁻¹))	428.69	1.84	89.91	1.391	23.17	1.33
Kurtosis	60.24	0.90	23.99	–0.167	25.57	0.37
Skewness	6.75	–0.74	4.31	–0.294	4.56	1.2

Finally, we considered a set of variables related to possible pollution pressure. We considered the application of fertilizer in the agricultural sector as a possible explanatory variable. We generated the nitrogen fertilizer application map from the Potter et al. (2010) data set. The values shown on this map represent an average application rate for all crops over a 0.5° resolution grid cell. Following this study, the highest N fertilizer application rate (i.e. 220 kg ha⁻¹) is found in Egypt's Nile Delta. We further considered population density as a proxy of pollution source. We considered the population density map for the year 2000, as produced by Nelson (2004).

3.4 Statistical model description

We used MLR as the statistical method for identifying the relationship between the observed nitrate concentrations in groundwater and the set of independent variables given in

Table 3. MLR is based on least squares, which means that the model is fitted such that the sum of squares of differences of predicted and measured values is minimized (Koklu et al., 2009; Helsel and Hirsh, 1992). The MLR model is denoted by Eq. (1):

$$y_i = \beta_0 + \sum_{j=1}^n \beta_j x_{ij} + \varepsilon_i \quad i = 1, m, \quad (1)$$

where y_i is the response variable at location i , β_0 is the intercept, β_j are the slope coefficients of the explanatory categorical or continuous variables x_{ij} , n is the number of variables, and m is the number of locations or wells (number of studies here). ε_i is the regression residual. In this study, the response variable is the log transformed nitrate concentration in groundwater. The log transformation was needed to stabilize the variance and to comply with the basic hy-

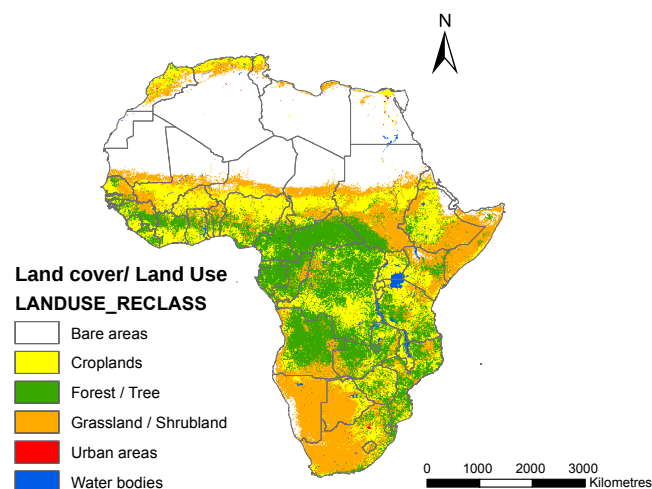


Figure 4. Land cover/land use map of Africa (modified from De-fourny et al., 2014).

pothesis of MLR. The log transformed nitrate concentration is a continuous monotonic increasing function; it is, therefore, reasonable to accept that factors that contribute to the log transformed nitrate load will also contribute to the nitrate load. The explanatory variables were defined using a stepwise procedure, using the Akaike information criterion (AIC) as a test statistic (Helsel and Hirsch, 1992). We evaluated model performance based on the significance level of estimated coefficients, the coefficient of determination (R^2), the mean square error (MSE), the probability plots of model residuals (PRES), the plots of predicted vs. observed values, and the Akaike information criterion (AIC). High values of R^2 and low values of RMSE, PRES, and AIC indicate a better performance of the model. To validate the model obtained by the stepwise procedure, the standard regression diagnostics were assessed. To test the heteroscedasticity in the model residuals, we use the Breusch–Pagan (BP) test by implementation with the “lmtest” package. A Student statistic t test was finally used to check the statistical significance (with p values < 0.10) of variables in the final model. We assessed tolerance to examine whether multicollinearity exists between variables. In this study, we performed the statistical analyses using R version 3.1.1 (R Development Core team, 2015).

4 Results

4.1 Normality of the dependent variable

Prior to analysis, we carefully checked the data using descriptive statistics such as boxplots and correlation analysis. The observed nitrate concentrations through meta-analysis range from 0 mg L^{-1} to 4625 mg L^{-1} for all categories, i.e. mean, maximum, and minimum values of nitrate groundwater contamination. Descriptive statistics are

summarized in Table 4. The average mean nitrate concentration is 27.85 mg L^{-1} . The positive skewness of the mean nitrate concentration data and the kurtosis suggest that the mean nitrate concentration is not normally distributed. In contrast, the log-normally transformed mean nitrate concentration obeys normality, as demonstrated by means of the non-parametric Shapiro–Wilk test (p value = $0.1432 > 0.05$). The histogram of mean and log transformed concentration is shown in Fig. 5. We also checked the minimum and maximum nitrate concentrations for normality (results can be obtained from the authors upon request).

4.2 Correlation between nitrate in groundwater and explanatory variables

Land cover/land use is a principle factor, controlling groundwater contamination. The boxplot distribution of log transformed mean nitrate concentration for different land use classes is presented in Fig. 6. Groundwater in agricultural and urban areas is clearly more susceptible to nitrate pollution as compared to forest/bare area land use. Also, water bodies are susceptible to nitrate contamination, but this result is likely spurious since only two studies support this category. We performed a similar analysis of the log transformed maximum and minimum nitrate concentrations. The corresponding boxplot results can be obtained from the authors upon request. High values for the log transformed maximum nitrate concentration are also found in urban and cropland areas. High values for the log transformed minimum nitrate concentration are detected in cropland fields. All analyses confirm that the highest nitrate pollution is retrieved in urban areas, immediately followed by agricultural areas.

In this study, the aquifer systems for Africa are divided into five categories based on the lithological formations. Figure 7 shows the relation between mean log transformed nitrate concentration and aquifer system type class. The carbonate rocks, the unconsolidated sediments, and the siliciclastic sedimentary rocks represent respectively the first, second, and third class in terms of nitrate contamination. The crystalline rock and volcanic rock aquifer classes are less contaminated. The high concentrations in the unconsolidated aquifer systems are a particular point of concern since this class is the most representative in terms of groundwater exploitation. The high concentrations in the carbonate rocks and fractured basalt can be explained by their high vulnerability related to the presence of solution channels and fractures.

The distribution of the log transformed mean nitrate concentration data with depth is shown in Fig. 8a. Apparently, no clear relationship exists between depth to groundwater and nitrate contamination. Pearson’s correlation gives a poor correlation ($r = 0.004$). However, careful analysis of this figure shows clearly that shallower wells (7–25 and 25–50 m b.g.l.) are associated with higher values of log transformed mean nitrate concentration, in contrast to the low values of log trans-

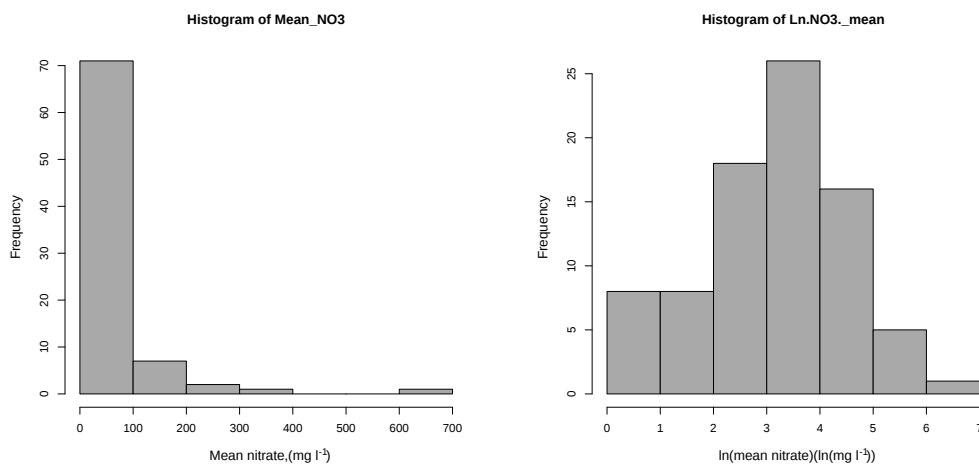


Figure 5. Histograms of observed mean nitrate concentration (mg L^{-1}) and log transformed mean nitrate concentration ($\ln(\text{mg L}^{-1})$).

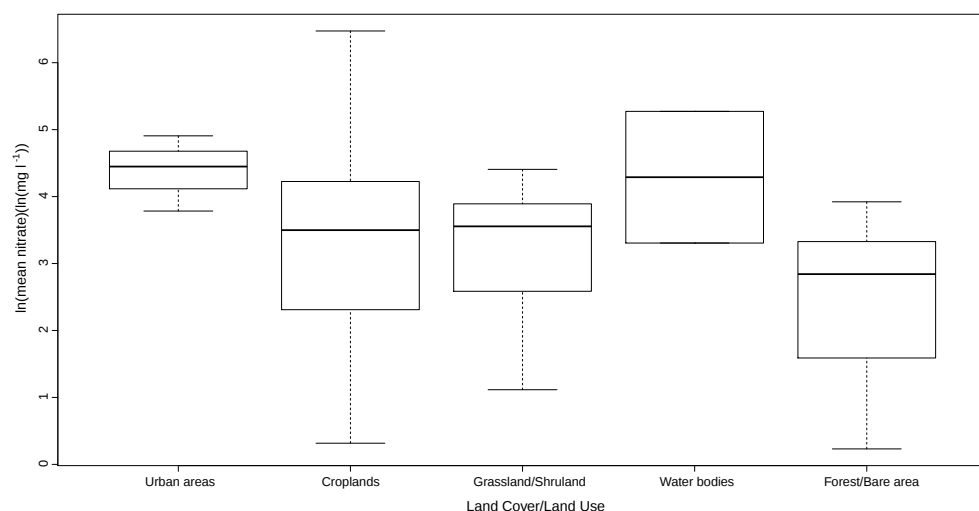


Figure 6. Log transformed mean nitrate concentration for different land use classes.

formed nitrate concentrations found in the deeper groundwater systems ($> 250 \text{ m b.g.l.}$).

The relationship between the log transformed mean nitrate concentration and groundwater recharge can also be observed in Fig. 8b. This figure shows that nitrate concentration in the groundwater decreases with recharge. This may be due to dilution of nitrate charge. We observe in this figure high nitrate concentrations in the very low recharge class ($0\text{--}45 \text{ mm yr}^{-1}$). This may be due to irrigation water return that feeds the groundwater and that is not integrated into the recharge calculations. The analysis of Pearson's correlation between recharge and log transformed mean nitrate gives $r = -0.292$.

The relation between the log transformed mean nitrate concentration and the population density is given in Fig. 8c. We observe increasing nitrate in groundwater related to increasing population. This explicit relationship between pop-


ulation density and nitrate concentration has a Pearson's correlation of 0.632. This obviously confirms the importance of studying the population as a potential polluting parameter and its relevant correlation with nitrate occurrence in the groundwater at the African scale.

Nitrogen fertilizer contributes significantly to an increase in crop yields, but excess nitrogen fertilizer generally pollutes groundwater (Green et al., 2004; Nolan et al., 2002). In the case of Africa, the impact of the nitrogen fertilizer application rate on log transformed mean nitrate concentration is illustrated in Fig. 8d. Pearson's correlation gives a low relation ($r = 0.09$). The analysis in this figure confirms that no clear relationship exists between fertilizer load and groundwater nitrate contamination. This can be linked to the relatively low fertilizer use in Africa as compared to other continents. Indeed, most studies have nitrogen fertilizer dressings that are below 50 kg ha^{-1} . According to the FAO (2012),

Table 5. Optimal linear regression model for explaining the log transformed mean nitrate concentration.

Coefficients	Estimate	Std. error	<i>t</i> value	Pr (> <i>t</i>)
(Intercept)	3.348	6.624×10^{-1}	5.055	$3.56 \times 10^{-6***}$
Depth (0–7)	1.160	3.895×10^{-1}	2.977	0.00404**
Depth (7–25)	6.563×10^{-1}	3.693×10^{-1}	1.778	0.08002*
Depth (25–50)	1.114	4.755×10^{-1}	2.342	0.02216**
Depth (50–100)	6.536×10^{-1}	4.005×10^{-1}	1.632	0.10744
Depth (100–250)	4.258×10^{-1}	6.766×10^{-1}	0.629	0.53129
Recharge (0–45)	-2.506×10^{-1}	6.089×10^{-1}	−0.412	0.68200
Recharge (45–123)	−1.187	6.055×10^{-1}	−1.961	0.05407*
Recharge (123–224)	−1.112	6.134×10^{-1}	−1.812	0.07440*
Recharge (224–355)	-8.856×10^{-1}	6.089×10^{-1}	−1.455	0.15047
Aquifer media (crystalline rocks)	-9.851×10^{-1}	3.374×10^{-1}	−2.920	0.00477**
Aquifer media (siliciclastic sedimentary rocks)	1.893×10^{-2}	3.916×10^{-1}	0.048	0.96158
Aquifer media (unconsolidated sediment rocks)	-7.632×10^{-1}	3.384×10^{-1}	−2.255	0.02740**
Aquifer media (volcanic rocks)	-5.245×10^{-1}	6.123×10^{-1}	−0.857	0.39469
Population density (people km ^{−2})	5.611×10^{-4}	6.887×10^{-5}	8.147	$1.30 \times 10^{-11***}$
Residual standard error: 0.9116 on 67 degrees of freedom				
Multiple R-squared: 0.65				
F-statistic: 8.693 on 14 and 67 DF, <i>p</i> value = $2.422 \times 10^{-10} < 0.001$				

Note: * significant at $p < 0.1$; ** significant at $p < 0.05$ and *** significant at $p < 0.001$.

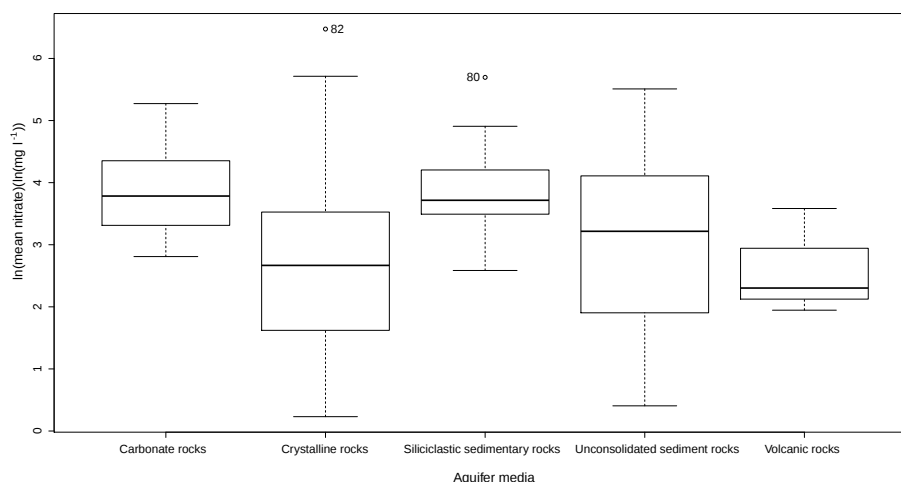**Figure 7.** Log transformed mean nitrate concentration for different aquifer system classes.

Africa only accounts for about 2.9 % of world fertilizer consumption in 2011.

We performed similar correlation analysis on the log transformed maximum concentration and log transformed minimum concentration respectively. Details can be obtained from the authors upon request. Results of these analyses are coherent with the results for log transformed mean nitrate concentration.

4.3 Development of the multi-variate statistical model

We developed a set of multiple variable regression models for the log transformed mean and maximum nitrate concen-

trations in terms of the above-mentioned explanatory variables. A positive regression coefficient indicates a positive correlation between a significant explanatory variable and a target contaminant, while a negative coefficient suggests an inverse or negative correlation. We retained only explanatory variables with p values ≤ 0.1 .

The best final model that explains the log transformed mean nitrate concentration includes only four explanatory variables: (1) depth to groundwater, (2) recharge, (3) aquifer type, and (4) population density. Table 5 summarizes the results of this linear regression model. This model can explain 65 % of the log transformed mean nitrate concentration ob-

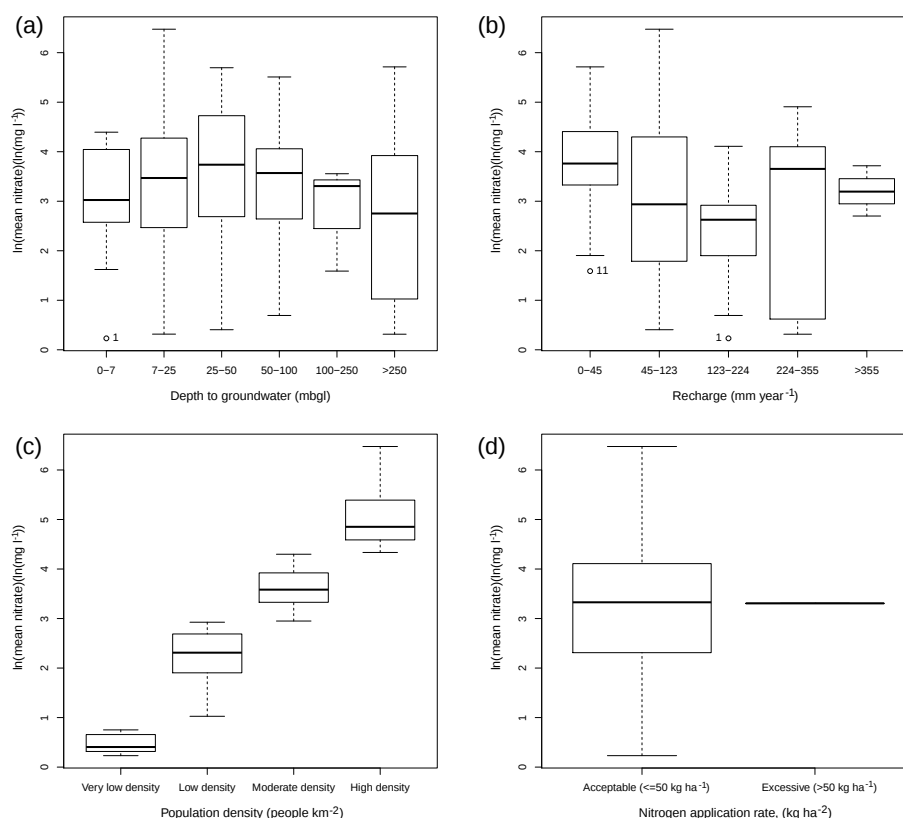


Figure 8. Log transformed mean nitrate concentration for different groundwater depth classes (a), recharge classes (b), population density classes (c) and nitrogen application rate classes (d).

servations. The sign of the parameter coefficient indicates the direction of the relationship between independent and dependent variables (Boy-Roura et al., 2013). The lower the p value, the more significant the model parameter.

The regression analysis confirms the strong relationship between population density and log transformed mean nitrate concentration. As the p value is far below 0.05, we are more than 95 % confident that the population density strongly affects the nitrate occurrences in groundwater.

The aquifer medium is another important explanatory variable for log transformed mean nitrate concentration. Three categories of aquifer media significantly explain the dependent variables: carbonate rocks, crystalline rocks, and unconsolidated sediment rocks. Indeed, the analysis of regression coefficients shows that the likelihood of nitrate contamination decreases with the presence of unconsolidated sediments and crystalline rocks. Other aquifer types tested include siliclastic sedimentary rocks, and volcanic rock aquifers were found to be statistically insignificant in the model. However, the aquifer media type is an important variable to assess groundwater vulnerability and to bring information about the hydrogeological system into the assessment. It allows one to differentiate the vulnerability in terms of aquifer lithology. Variables such as hydraulic conductivity could be surrogates

for aquifer media because hydraulic conductivity data were developed based on the lithological formation. Nevertheless, they were not statistically significant in the final model.

The third variable represents the depth to groundwater. The three first classes (0–7, 7–25, and 25–50 m b.g.l.) of groundwater depth are all statistically significant. The water table corresponding to the 0–7 m class has the strongest statistical significance. The positive parameter coefficient indicates large contamination for shallow groundwater depths. By analysing the table of the coefficients, we observe that the largest groundwater depth class (100–250 m b.g.l.) is not statistically significant (p value > 0.05). We can conclude that the shallow groundwater systems at an African scale are most vulnerable to nitrate pollution.

The fourth variable included in the final model is the recharge. The recharge rates in the 45–123 and 123–224 mm yr⁻¹ classes are statistically significant. In general, these rates correspond to semi-arid and dry sub-humid regions. The high concentrations in these areas can be due to intensive agricultural activities.

Other explanatory variables such as rainfall or land cover/land use were not considered in the final model. Indeed, notwithstanding the fact that a variable such as land cover/land use strongly influences observed log transformed

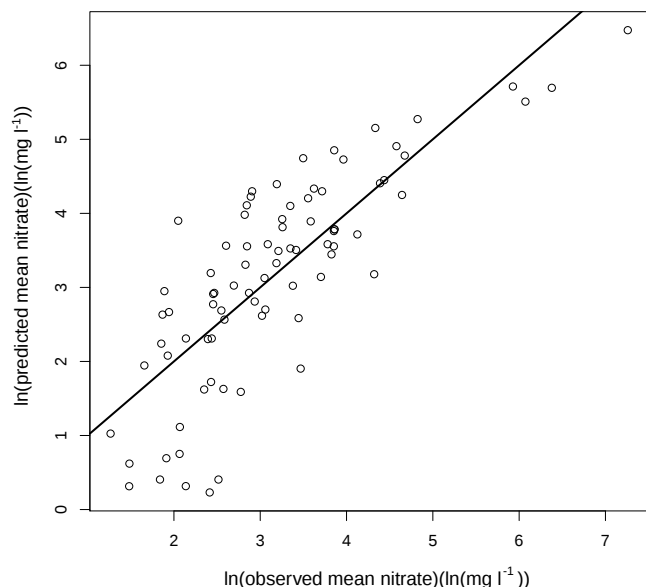


Figure 9. Predicted vs. observed mean log transformed nitrate concentration ($R^2 = 0.65$).

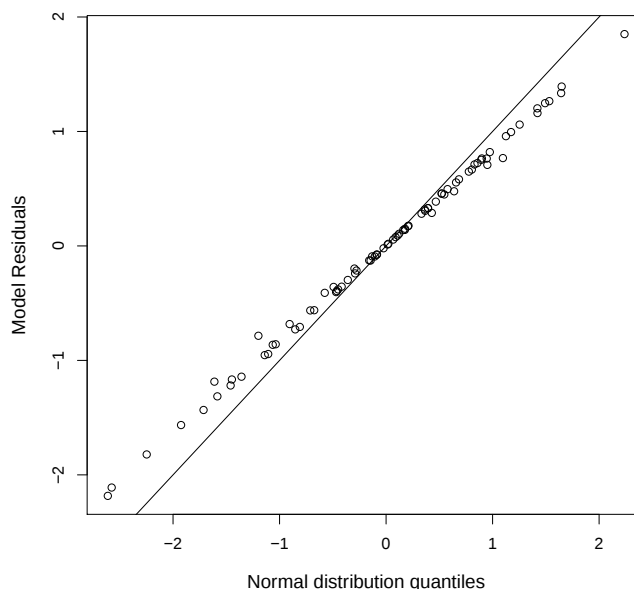


Figure 10. Normal probability distribution of model residuals for the predicted log transformed mean nitrate concentration.

mean nitrate concentration (Fig. 6), it is related to other variables such as population density. Hence, to avoid multicollinearity in the final model, the land cover/land use variable is no longer included in the final model.

The final MLR model using the four variables yields an R^2 of 0.65, indicating that 65 % of the variation in observed log transformed mean nitrate concentration at the African scale is explained by the model. The result of the model is globally significant because the p value is 2.422×10^{-10} at 95 % of the significance level. The observed vs. predicted log transformed mean nitrate concentrations are shown in Fig. 9 and indicate that the MLR fits the data well. The probability plot of model residuals indicates that the distribution is close to normal (Fig. 10). We performed the Shapiro–Wilk test as an additional check on the distribution of nitrate residuals. Because the probability associated with the test statistic is larger than 0.05, we accept the null hypothesis that the residuals follow a normal distribution. Despite the fact that a few points have a higher Cook D value compared to the rest of the observation, they were kept in the MLR to represent the whole range of nitrate concentration data. In order to check the regressions' assumptions of homoscedasticity, a plot of the residuals of log transformed mean nitrate vs. the predicted log transformed mean values is illustrated in Fig. 11. We observe that the majority of observations are in the range of -2 to 2 , except for two outliers observed in the bottom left part of the graph. The residual standard error of the log transformed mean nitrate is 0.91116 ($\ln(\text{mg L}^{-1})$). We observe that the residuals decrease with increasing predicted nitrate concentrations. The Breusch–Pagan test was used to assess heteroscedasticity in the model residuals (BP = 24.2773 and

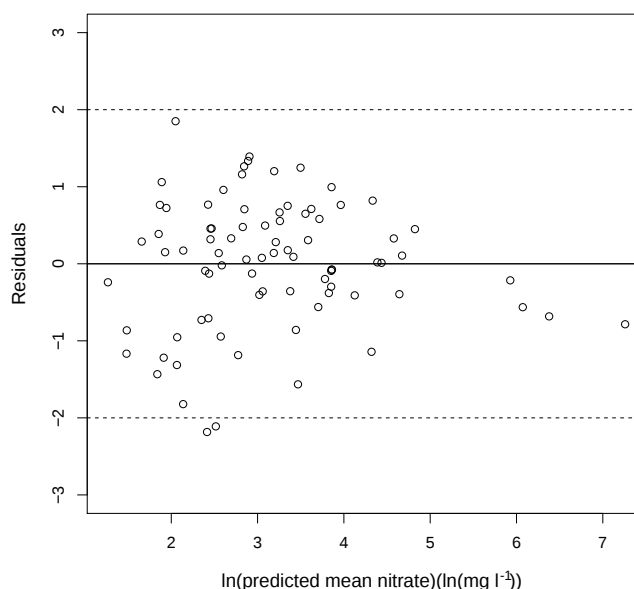


Figure 11. Relation between residuals and predicted log transformed mean nitrate concentration.

p value = 0.042). With a p value of 0.042, we reject the null hypothesis that the variance of the residuals is constant, and infer that heteroscedasticity is indeed present. As a result, we may expect some bias in the MLR model.

Similarly to the log transformed mean nitrate concentration modelling, we developed another model corresponding to the log transformed maximum nitrate concentration. This model yielded only $R^2 = 0.42$ for the maximum values. The explanatory variables which influence the log transformed

maximum nitrate concentration in groundwater are depth to groundwater, soil media, topography, rainfall, climate class, and type of region. For the log transformed minimum concentration, the absence of normal distribution assumptions did not allow one to develop a MLR model.

5 Discussion

We present in this study a database method to assess the vulnerability of groundwater systems to water quality degradation. We used the log transform of reported nitrate concentration as a proxy for groundwater vulnerability. We present a statistical model to explain this proxy in terms of generic data at the African scale. In a previous study, we evaluated the groundwater vulnerability to pollution at the African scale using the generic DRASTIC approach (Ouedraogo et al., 2016). However, the uncalibrated DRASTIC model predictions are subjected to quite some uncertainty, in particular due to the subjectivity in assigning the generic DRASTIC model parameters. In contrast to this previous study, we focus in this paper on nitrate pollution, which is a parameter that is strongly related to vulnerability and which often is measured in ongoing monitoring programmes. We integrate published nitrate in groundwater data explicitly in the assessment, thereby reducing the subjectivity of the DRASTIC approach.

We assessed in this study the quality of the data (Sect. 3.2). Yet notwithstanding this, some caution is needed in the interpretation of the results, in particular as bias may be present in the meta-analysis. For instance, there may be bias towards studies on aquifers which are productive and used for drinking water supply, irrigation, or mining activities. Another possible bias is that some studies mainly focussed on nitrates, while others are oriented to more general groundwater quality studies. Furthermore, the data were collected from different sources (peer-reviewed journal articles, book chapters, or other grey literature). With such an approach, sampling and analytical methods are not standardized, being an additional source of possible bias. Data availability is a major issue when developing a continental-scale groundwater nitrate statistical model. Unsurprisingly there are no consistent and standardized monitoring data sets at the continental scale. The available data sets are also patchy, both spatially and temporally. A meta-analysis of literature data is so far the only method for getting the picture at the continental scale. Results from this meta-analysis should not be over-interpreted. Whilst the data provide a useful preliminary assessment of the nitrate contamination in groundwater at the African scale, there are clear limitations.

In this study, we used MLR to explain nitrate groundwater in terms of other generic spatially distributed environmental parameters. MLR is an approach to model the relationship between a response variable and multiple sets of explanatory variables (Rawlings et al., 1998). MLR analysis is ca-

pable of both predicting and explaining a response variable using explanatory variables without compromise (Kleinbaum et al., 1988). Previous studies of MLR using spatial variables for nitrate concentration in groundwater showed R^2 values of 0.52 and 0.64 in shallow alluvial aquifers (Gardner and Vogel, 2005; Kaown et al., 2007) and an R^2 of 0.82 in deep sandy tertiary aquifers (Mattern et al., 2009). For the application in this study, we selected the parameters using stepwise MLR regression, allowing us to select only those parameters which have a significant impact on the log transformed concentration values of nitrate.

The explanatory variables with the strongest influence on the mean log transformed nitrate concentration at the African scale are the population density and groundwater depth, which is in agreement with results from other studies such as Nolan (2001), Nolan et al. (2002), Nolan and Hitt (2006), Liu et al. (2013), Bonsor et al. (2011), and Sorichetta et al. (2013). Both explanatory variables are directly related to the probability of having high nitrate concentrations in groundwater. The strong influence of the population density variable can be explained by the serious problem of sanitation in African townships. This is consistent with the conclusions of UNEP/UNESCO project “Assessment of Pollution Status and Vulnerability of Water Supply Aquifers Cities”, stating that the major pollution pressures on African water bodies are related to poor on-site sanitation, solid waste dumpsites including household waste pits, and surface water influences (Xu and Usher, 2006). This is also consistent with other studies stating that leaking septic tanks and sewer systems are considerably causing nitrate contamination of groundwater in urban areas (Böhlke, 2002; Showers et al., 2008). The magnitude of contamination is not only affected by the population density, but also by the socio-economic setting (UNEP/DEWA, 2014). A high population density is therefore often associated with the lack of adequate sanitation in many slums/shanty towns in Africa. The strong influence of population density in our model suggests that high concentrations in groundwater are mainly from subsurface leakage of municipal sewage systems, petrol service stations (underground storage tanks), and agricultural chemicals in small-scale farming. Hence, sanitation programmes in Africa must not be delinked from groundwater protection and controlling the use of fertilizer products in agriculture.

Nitrate concentrations were generally higher for shallower wells than for deeper groundwater systems. For deep groundwater, predicted nitrate concentration was lower as compared to shallow groundwater (Nolan et al., 2014). Alluvial and shallow aquifers are thus particularly vulnerable to nitrate pollution, while deep confined aquifers are generally better protected. The inverse relation between depth and nitrate is consistent with previous groundwater studies that considered well depth or depth of the screened interval as explanatory variables (Nolan and Hitt, 2006; Nolan et al., 2014; Wheeler et al., 2015; Ouedraogo and Vanclooster, 2016). Nitrate generally moves relatively slowly in soil and groundwater, and

therefore there is a significant time lag between the polluting activity and detection of the pollutant in groundwater (typically between 1 and 20 years, depending on the situation) (Boy-Roura, 2013; Mattern and Vanclooster, 2009). Deeper groundwater may, therefore, predate periods of intensive fertilizer application (1950–present).

The rate at which nitrate moves through the subsurface depends on the permeability and extent of fissuring of soil and aquifer, which controls flow, diffusion, and dispersion processes. According to Close (2010), nitrate is negatively charged and thus electrostatically repelled by media in the unsaturated zone that usually have a negative charge, such as clay minerals. This means that nitrate sorption within the unsaturated zone is unlikely and that the large residence times are related to the slow physical transport process. Foster and Crease (1974) and Young et al. (1976) were the first authors to mention a “storage of nitrate” in porewater and consequent slow vertical migration through the unsaturated zone towards groundwater systems. More recently, other investigators showed the process of nitrate accumulation in the unsaturated zone (Ascott et al., 2016; Wang et al., 2016; Worall et al., 2015). The long travel distances towards deep aquifer systems increase the probability that nutrients will react for instance through denitrification (Stevenson and Cole, 1999; Thayalakumaran et al., 2004; Aljazzar, 2010; Wheeler et al., 2015). Denitrification is facilitated by the absence of oxygen. Denitrification was found to be relatively limited in the unsaturated zone (Kinniburgh et al., 1994; Rivett et al., 2008), while it is the principle process responsible for reduction of nitrate in groundwater (Aljazzar, 2010; Stevenson and Cole, 1999; Thayalakumaran et al., 2004), in particular in reduced groundwater (Burow et al., 2013). Boy-Roura et al. (2013), for instance, found low nitrate concentrations (below 50 mg L^{-1}) in those areas where denitrification processes have been identified. An indicator of the presence of denitrification processes contributed as such to explain nitrate contamination in the Osona region (north-eastern Spain) (Boy-Roura et al., 2013). In our study, an indicator of the presence of denitrification processes in the groundwater system was not available and could not be included in the model.

Another remark concerns the presence of nitrate in some specific geological formations. According to Tredoux and Talma (cited in Xu and Usher, 2006), an apparent correlation may exist between the occurrence of high nitrate levels and certain geological formations. The apparent correlation however between the occurrence of high nitrate levels and certain geological formations is mainly due to secondary effects. Only in exceptional cases can geological formations serve as a primary source of nitrogen. This happens when contamination ions are incorporated into rock minerals to be released by weathering and oxidized to nitrate. These authors further concluded that in most cases, the occurrence of high levels of nitrate is due to contamination related to anthropogenic activities.

The strong relation between nitrate contamination and both groundwater depth and population density is a particular point of concern given the fact that the majority (85 %) of Africa's population lives in regions where depth to groundwater is shallow (0–50 m b.g.l.) and where hand pumps may be used to abstract water. Eight percent of these people (i.e. nearly 66 million people) are likely to live in areas where depth to groundwater is 0–7 m b.g.l. A significant minority (8 %) of Africa's population lives in regions where the depth to groundwater is between 50 and 100 m b.g.l., and common hand pump technologies (e.g. India Mark) are inoperable in these cases. These areas are mainly within southern Africa and to a lesser extent situated in the Sahel.

A third important explanatory variable that was included in the model was the groundwater recharge rate. The recharge rate of an aquifer is indeed another factor that controls groundwater flow regime and hence the movement of nitrate. Nitrate can easily be transported to shallow groundwater in well-drained areas with rapid infiltration and highly permeable subsurface materials. However, according to a recent study in the shallow unconfined aquifer of the Piemonte plain, dilution can be considered the main cause of nitrate attenuation in groundwater (Debernardi et al., 2007). The variable recharge in our model is consistent with studies like Hanson (2002) and Saffigna and Keeney (1997). According to UNEP/DEWA (2014), recharge from multiple sources influences groundwater microbial and chemical water quality. Groundwater recharge rate is interlinked with many other environmental variables, including, but not limiting, soil type, aquifer type, antecedent soil water content, land use/land cover type, and rainfall (Sophocleous, 2004; Ladekarl et al., 2005; Anuraga et al., 2006). Hence, to avoid multi-collinearity, variables like land use/land cover type, rainfall, and soil type were not considered in the final model.

Despite land cover/land use type not being explicitly included in the final model, the exploratory analysis clearly shows a strong relationship between nitrate concentration and land use/land cover type. Indeed, nitrate concentrations are generally higher in urban areas. This is consistent with many other studies such as Showers et al. (2008). The high contamination in urban areas jeopardizes groundwater exploitation in urban areas. Urbanization is a pervasive phenomenon around the world, and groundwater demands in urban areas are increasingly growing. The degradation of groundwater bodies in urban areas is, therefore, a particular point of concern. Also, agricultural land exhibits an impact on groundwater nitrate concentrations compared to the grassland/shrubland, water bodies, and forest/bare area, but this effect is less important as compared to agricultural land effects in other parts of the world (e.g. Europe).

The influence of aquifer type on the nitrate contamination was demonstrated by Boy-Roura et al. (2013) and the influence of soil type by Liu et al. (2013). As with land cover/land use type, these variables were not retained in the final model to avoid collinearity with recharge.

The advantage of the MLR technique is that it can be easily implemented and that model parameters can be easily interpreted if the possible interaction between variables is ignored. However, MLR cannot represent well the many non-linear dynamics that are associated with the contamination of groundwater systems. The violation of the homoscedasticity hypothesis, for instance, indicates that some bias will be present in our MLR model. Standard statistical models employed in distribution modelling, such as MLR, work under the assumption of independence in the residuals and homoscedasticity. When heteroscedasticity is present, residuals may be autocorrelated. This will lead to inflated estimates in degrees of freedom, an underestimation of the residual variances, and an overestimation of the significance of effects (Legendre and Fortin, 1989; Legendre, 1993; Dale and Fortin, 2002; Keitt et al., 2002). This may show that others variables should be included in the model or that the system may be highly non-linear.

We could avoid heteroscedasticity and improve the modelling performance by introducing non-linear regression techniques (Prasad et al., 2006) or by introducing additional variables in the model. Indeed, many studies showed that non-linear statistical models of groundwater contamination outperform the linear models (e.g. Pineros-Garcet et al., 2006; Mattern et al., 2009; Oliveira et al., 2012; Wheeler et al., 2015). To uncover non-linear relationships, non-parametric data mining approaches provide obvious advantages (Olden et al., 2008; Wiens, 1989; Dungan et al., 2002). Machine learning provides a framework for identifying other explanatory variables, building accurate predictions, and exploring other non-linear mechanistic relationships in the system. We may, therefore, expect that non-linear statistical models will improve the explanatory capacity of the model and remove heteroscedasticity from the model.

However, we believe that this theoretical constraint of heteroscedasticity does not undermine the overall results. The observed heteroscedasticity can be considered modest in view of the large extent of the study and the violation of statistical design criteria when collecting data through a meta-analysis. Also, the interpretation of the factors and coefficients associated with non-linear regression techniques becomes more complicated. We, therefore, prefer to maintain in this paper the MLR techniques as a first approach to screen the factors that contribute to log transformed mean nitrate concentration risk. We suggest however that future studies should address the added value that can be generated with non-linear modelling techniques. Such non-linear modelling techniques are particularly needed for the maximum concentration for which the R^2 of simple MLR remains currently too poor, and also for the minimum concentration, which shows the absence of normal distribution assumptions.

Also, in this study, we only identified a MLR model based on a meta-analysis spanning the African continent. Since the data collected through the meta-analysis are very heterogeneous, the quality of the data set remains rather poor. There-

fore, future studies should critically address the validity of the identified model and explore how the model can be improved and used in a predictive model. It is however suggested that such model improvement and validation steps should be based on a more homogeneous data set. We, therefore, suggest performing this future model validation and model improvement step using data collected at the regional scale using more homogeneous data collection protocols.

6 Conclusion

Contamination of groundwater by nitrate is an indicator of groundwater quality degradation and remains a point of concern for groundwater development programmes all over the world. It is also a good proxy of overall groundwater vulnerability to water quality degradation. We address in this paper the issue of nitrate contamination of groundwater at the African scale. We inferred the spatial distribution of nitrate contamination of groundwater from a meta-analysis of published field studies of groundwater contamination. We analysed the literature for reported mean, minimum and maximum concentrations of nitrate contamination. We subsequently analysed, using boxplots, the reported contamination in terms of spatially distributed environmental attributes related to pollution pressure and attenuation capacity. We extracted the explanatory variables from a geographic information system with the ArcGIS 10.3TM tool.

We finally developed a MLR statistical model allowing us to explain quantitatively the log transformed observed contamination that is a proxy of vulnerability, in terms of spatially distributed attributes. We selected the explanatory variables using a stepwise regression method.

Groundwater contamination by nitrates is reported throughout the African continent, except for a large part of the Sahara. The observed nitrate concentrations range from 0 to 4625 mg L⁻¹. The mean nitrate concentration varies between 1.26 to 648 mg L⁻¹. The sample mean of this mean nitrate concentration is 54.85 mg L⁻¹, its standard deviation was 89.91 mg L⁻¹, and its median was 27.58 mg L⁻¹. The minimum nitrate concentration varies between 0 and 185 mg L⁻¹, while the maximum concentration varies from 0.08 to 4625 mg L⁻¹. The sample means of the minimum and maximum concentrations are 8.91 and 190.05 mg L⁻¹; the sample standard deviations are 23.17 and 428.69 mg L⁻¹; and the sample medians are 0.55 and 73.64 mg L⁻¹ respectively. The distribution of the reported nitrate contamination data is strongly skewed. We, therefore, build statistical models for the log transformed mean and maximum concentrations.

The graphical boxplot analysis shows that nitrate contamination is important in shallow groundwater systems and strongly influenced by population density and recharge rate. Nitrate contamination is, therefore, a particular point of concern for groundwater systems in urban sectors.

The MLR model for the log transformed mean nitrate concentration uses “the depth to groundwater”, “groundwater recharge rate”, “aquifer type” and “population density” as explanatory variables. The total variability explained by the model is 65 %. This suggests that other variables may be needed to explain the reported nitrate concentrations. These findings highlight the challenges in developing appropriate regional databases to predict groundwater degradation. The MLR shows that the population density parameter is the most statistically significant variable. This confirms that leaking cesspits and sewer systems are causing significant nitrate contamination of groundwater, predominantly in urban areas. We identified similar MLR models for the log transformed maximum nitrate concentrations. However, for this latter attribute, the explained variation using the simple MLR techniques (i.e. 42 %) remains small.

One of the main strengths of our study is that it is based on a large database of groundwater contamination reports from different countries, spanning the African continent and linked to environmental attributes that are available in a spatially distributed high-resolution format. In addition, the development of a continental-scale model of nitrate contamination in groundwater of Africa allowed one to determine which explanatory variables mainly influence the presence of nitrate. This represents an important step in managing and protecting both water resources and human health at the African scale. The main weakness of the modelling approach lies in the lack of detailed information available at the African scale, particularly the lack and uneven distribution of measured nitrate points. In spite of weaknesses and uncertainties caused by a moderate heteroscedasticity from residuals in the model, the modelling approach presented here has great potential. Although the meta-analysis should not replace systematic nitrate monitoring, it gives a first indication of possible contamination. It can also be applied to the preliminary assessment of nitrate using spatial variables. This may support the water resource development programme for transboundary aquifer managers and regional basin organizations. This is particularly important as the demand for drinking water is increasing rapidly at the African scale.

We suggest that further development include the use of non-linear modelling techniques such as random forest techniques. Such techniques have the potential to improve the quality of explanation and eventually prediction by incorporating spatial autocorrelation. We also suggest that the models should be further validated using more homogeneous data sets. In a predictive mode, statistical models like those developed in the present paper can be used for exposure estimates in epidemiological studies on the effect of polluted groundwater on human health. Similar models can also be developed for other contaminants and could be explored.

Appendix A: Acronyms

BGS	British Geological Survey
DEWA	Division of Early Warning and Assessment
DRASTIC	Depth, Recharge, Aquifer media, Soil media, Topography, Impact of vadose zone, Conductivity
ECOWAS	Economic Community of West African States
FAO	Food and Agriculture Organization (United Nations)
OECD	Organization for Economic Cooperation and Development
MODFLOW	MODular finite-Difference Flow model (US Geological Survey)
SADC	Southern African Development Community
UNEP	United Nations Environment Programme
UNESCO	United Nations Educational, Scientific and Cultural Organization
US EPA	United States Environmental Protection Agency

Acknowledgements. This work was funded by the IDB (Islamic Development Bank) under its PhD Merit Scholarship Program (MSP) to the first author. GIS shape files to generate generic attributes were obtained from different sources throughout the world and also online. In this regard, special thanks go to Tom Gleeson, Petra Döll, Nils Moosdoorf, and P. Trambauer. We are especially indebted to the anonymous reviews for valuable comments on the manuscript.

Edited by: T. Kjeldsen

References

- Abate, E. Y.: Anthropogenic Impacts on Groundwater Resources in the urban Environment of Dire Dawa, Ethiopia. Master Thesis in Geosciences, Department of Geosciences, Faculty of Mathematics and Natural Sciences, University of Oslo, 64 pp., 2010.
- Abd El-Salam, M. M. and Abu-Zuid, G. I.: Impact of landfill leachate on the groundwater quality: A case study in Egypt, *J. Adv. Res.*, 2014.
- Abdalla, F. A. and Scheytt, T.: Hydrochemistry of surface water and groundwater from a fractured carbonate aquifer in the Helwan area, Egypt. *J. Earth Syst. Sci.*, 121, 109–124, 2012.
- Abdel-Lah, A. K. and Shamrukh, M.: Impact of septic system on ground water quality in a Nile valley village, Egypt. Sixth International Water Technology Conference, IWTC 2001, Alexandria, Egypt, 237–245, 2001.
- Abdelbaki, C., Asnoui, F., Assoud, I., Cherif, Z. E. A., and Yahiaoui, I.: Contribution to the cartography of the groundwater quality of the urban group of Tlemcen (Algeria), *Larhyss J.*, 16, 7–19, 2013.
- Abdellah, A. M., Abdel-Magid, H. M., and Shommo, E. I.: Assessment of Groundwater Quality in Southern Suburb of the Omdurman City of Sudan, *Greener J. Environ. Manage. Publ. Safety*, 2, 83–90, 2013.
- Abdesselam, S., Halitim, A., Jan, A., Trolard, F., and Bourrié, G.: Anthropogenic contamination of groundwater with nitrate in arid region: case study of southern Hodna (Algeria), *Environ. Earth Sci.*, 70, 2129–2141, 2012.
- Abenan, A. T., Jean, K. K., Bachir, S. M., Armand, A. K., Serge, D. K., Tanoh, K. J. J., Adiow, E. T., Kouassi, S. H., Jean-Patrice, J., and Jean, B.: Contribution of multicriteria analysis and GIS for the specific vulnerability mapping to agricultural inputs of groundwaters in Bonoua area (Southeast of Côte d'Ivoire), 2012.
- Abou, M. M.: Pollution des eaux souterraines en milieu urbain, cas de la nappe phréatique de la ville de Niamey, *Institut Supérieur des Techniques de l'Eau*, 112, 8 pp., 2000.
- Ackah, M., Agyemang, O., Anim, A. K., Osei, J., Bentil, N. O., Kpattah, L., Gyamfi, E. T., and Hanson, J. E. K.: Assessment of groundwater quality for drinking and irrigation: the case study of Teiman-Oyarifa Community, Ga East Municipality, Ghana, *Proc. Int. Acad. Ecol. Environ. Sci.*, 1, 186–194, 2011.
- Adelekan, B. and Ogunde, O.: Quality of water from dug wells and the lagoon in Lagos Nigeria and associated health risks, *Sci. Res. Essay*, 7, 1195–1211, 2012.
- Affum, A. O., Osa, S. D., Nyarko, B. J., Afful, S., Fianko, J. R., Akiti, T. T., Adomako, D., Acquah, S. O., Dorleku, M., Antoh, E., Barnes, F., and Affum, E. A.: Total coliforms, arsenic and cadmium exposure through drinking water in the Western Region of Ghana: application of multivariate statistical technique to groundwater quality, *Environ. Monit. Assess.*, 187, 4167, doi:10.1007/s10661-014-4167-x, 2015.
- Aghzar, N., Berdai, H., Bellouti, A., and Soudi, B.: Pollution nitrrique des eaux souterraines au Tadla (Maroc), *J. Water Sci.*, 15, 459–492, 2002.
- Ahmed, A. L. M., Sulaiman, S., Osman, M. M., Saeed, E. M., and Mohamed, Y. A.: Groundwater quality in Khartoum state, Sudan, *J. Environ. Hydrol.* 8, 7 pp., 2000.
- Ahoussi, K. E., Youan, T. M., Loko, S., Adja, M. G., Lasm, T., and Jourda, J. P.: Étude hydrogéochimique des eaux des aquifères de fractures du socle Paléo-protérozoïque du Nord-Est de la Côte d'Ivoire: Cas de la région de Bondoukou, *Afrique Sci.*, 8, 51–68, 2012.
- Ake, G. E., Kouadio, H. B., Dongo, K., Dibi, B., Kouame, F. K., and Biemi, J.: Application des méthodes DRASTIC et SI pour l'étude de la vulnérabilité à la pollution par les nitrates (NO_3^-) de la nappe de Bonoua (Sud-Est de la Côte d'Ivoire), *Int. J. Biol. Chem. Sci.*, 4, 1676–1692, 2010.
- Akinbile, C. O.: Environmental Impact of Landfill on Groundwater Quality and Agricultural Soils in Nigeria, *Soil Water Res.*, 7, 18–26, 2012.
- Akoteyon, I. S. and Soladoye, O.: Groundwater Quality Assessment in Eti-Osa, Lagos-Nigeria using Multivariate Analysis, *J. Appl. Sci. Environ. Manage.*, 15, 121–125, 2011.
- Aladejana, J. A. and Talabi, A. O.: Assessment of Groundwater Quality in Abeokuta Southwestern, Nigeria, *Int. J. Eng. Sci.*, 2, 21–31, 2013.
- Alaoui, H. L., Oufdou, K., and Mezrioui, N.: Environmental pollution impacts on the bacteriological and physicochemical quality of suburban and rural groundwater supplies in Marrakesh area (Morocco), *Environ. Monit. Assess.*, 145, 195–207, 2008.
- Aljazzar, T. H.: Adjustment of DRASTIC Vulnerability Index to Assess Groundwater Vulnerability for Nitrate Pollution Using the Advection-Diffusion Cell. Von der Fakultät für Georessourcen und Materialtechnik der Rheinisch-Westfälischen Technischen Hochschule Aachen, 146 pp., 2010.
- Aller, L., Bennet, T., Lehr, J. H., and Petty, R. J.: DRASTIC: A standardized system for evaluating groundwater pollution using hydrological settings, Ada, OK, USA: Prepared by the National water Well Association for the US EPA Office of Research and Development, EPA/600/2-85-018, 163 pp., 1985.
- Amini, M., Mueller, K., Abbaspour, K. C., Rosenberg, T., Afyuni, M., Møller, K. N., Sarr, M., and Johnson, C. A.: Statistical modeling of global geogenic fluoride contamination in groundwaters, *Environ. Sci. Technol.*, 42, 3662–3668, 2008a.
- Amini, M., Abbaspour, K. C., Berg, M., Winkel, L., Hug, S. J., Hoehn, E., Yang, H., and Johnson, C. A.: Statistical modeling of global geogenic arsenic contamination in groundwater, *Environ. Sci. Technol.*, 42, 3669–3675, 2008b.
- Anane, M., Selmi, Y., Limam, A., Jedidi, N., and Jellali, S.: Does irrigation with reclaimed water significantly pollute shallow aquifer with nitrate and salinity? An assay in a perurban area in North Tunisia, *Environ. Monit. Assess.*, 186, 4367–4390, 2014.
- Angola Water Works: Annual Drinking Water Quality Report. IN5276001, <http://www.angolain.org/Water/documents/Angola2013AnnualWaterReport.pdf> (last access: 13 August 2014) 2 pp., 2013.

- Ansa-Asare, O. D., Darko, H. F., and Asante, K. A.: Groundwater quality assessment of Akatsi, Adidome and Ho districts in the Volta Region of Ghana, *Desalination*, 248, 446–452, 2009.
- Anthony, K.-O.: Impact of municipal solid wastes on underground water sources in Nigeria, *Eur. Sci. J.*, 8, 19 pp., 2012.
- Anuraga, T. S., Ruiz, L., Kumar, M. S. M., Sekhar, M., and Leijnse, A.: Estimating groundwater recharge using land use and soil data: A case study in South India, *Agr. Water Manage.* 84, 65–76, 2006.
- Armah, F. A., Luginaah, I., and Benjamin, A.: Water Quality Index in the Tarkwa Gold Mining Area in Ghana, *J. Transdiscipl. Environ. Stud.*, 11, 15 pp., 2012.
- Armah, Y.: Hydrochemical Analysis of Groundwater In The Lower Pra Basin of Ghana, *J. Water Resour. Protect.*, 2, 864–871, 2010.
- Ascott, M. J., Wang, L., Stuart, M. E., Ward, R. S., and Hart, A.: Quantification of nitrate storage in the vadose (unsaturated) zone: a missing component of terrestrial N budgets, *Hydrol. Process.*, 542, 694–705, doi:10.1002/hyp.10748, 2016.
- Asslouj, J. E., Kholtei, S., Amrani-Paaza, N. E., and Hilali, A.: Impact des activités anthropiques sur la qualité des eaux souterraines de la communauté Mzamza (Chaouia, Maroc), *Rev. Sci. Eau*, 20, 309–321, 2007.
- Ateawung, J. N.: A GIS-Based Water Balance Study of Africa. Master of Physical Land Resources, Universiteit Gent Vrije Universiteit Brussel Belgium., 55 pp., 2010.
- Aza-Gnandji, C. D. R., Xu, Y., Raitt, L., and Levy, J.: Salinity of irrigation water in the Philippi farming area of the Cape Flats, Cape Town, South Africa, *Water SA*, 39, 199–210, 2013.
- Bagalwa, M., Majaliwa, M., Mushagalusa, N., and Karume, K.: Estimation of Transported Pollutant Load from Small Urban Kahuwa River Micro-catchment in Lake Kivu, Democratic Republic of Congo, *J. Environ. Sci. Eng.*, 2, 460–472, 2013.
- Bahri, F. and Saibi, H.: Characterization, classification, bacteriological, and evaluation of groundwater from 24 wells in six departments of Algeria, *Arab. J. Geosci.* 5, 1449–1458, 2012.
- Balogun, I. I., Akoteyon, I. S., and Adeaga, O.: Evaluating Land Use Effects on Groundwater Quality in Lagos-Nigeria Using Water Quality Index, *J. Sci. Res.*, 4, 397–409, 2012.
- Barhe, T. A. and Bouaka, F.: Physicochemical Characterization and Chlorination of Drilling Water Consumed In Brazzaville-Congo. *Journal of Chemical, Biological and Physical Sciences, An International Peer Review E-3, J. Sci.*, 3, 2328–2336, 2013.
- Batisani, N.: Groundwater hydrochemistry evaluation in rural Botswana: A contribution to integrated water resources management, *Ethiop. J. Environ. Stud. Manage.*, (Suppl.1), 5, 521–528, doi:10.4314/ejesm.v5i4.S12, 2012.
- Bauder, J. W., Sinclair, K. N., and Lund, R. E.: Physiographic and land use characteristics associated with nitrate nitrogen-nitrogen in montana groundwater, *J. Environ. Qual.*, 22, 255–262, 1993.
- Belghiti, M. L., Chahlaoui, A., Bengoumi, D., and El Moustaine, R.: Etude de la qualite physico-chimique et bacteriologique des eaux souterraines de la nappe plio-quaternaire dans la région de Meknès (Maroc), *Larhyss J.*, 14, 21–36, 2013.
- Belkhir, L. and Mouni, L.: Hydrochemical analysis and evaluation of groundwater quality in El Eulma area, Algeria, *Appl. Water Sci.*, 2, 127–133, 2012.
- Ben Abbou, M., Fadil, F., El Haji, M., and Zemzami, M.: Impact anthropique sur la qualite des eaux souterraines du bassin versant de l'Oued Taza (Maroc), *Eur. Sci. J.*, 10, 117–137, 2014.
- Benabbou, A., Benhoussa, A., Fekhaoui, M., El blidi, S., El Abidi, A., and Bounagua, M.: Assessment the risk of impact of waste treatment center on groundwater quality in Oum Azza (Rabat, Morocco), *J. Mater. Environ. Sci.*, 5, 143–152, 2014.
- BGS (British Geological Survey): Groundwater Quality: Ghana. Report, 4 pp., 2000a.
- BGS (British Geological Survey): Groundwater Quality: Tanzania. Report, 4 pp., 2000b.
- BGS (British Geological Survey): Groundwater Quality: Ethiopia. Report, 6 pp., 2001a.
- BGS (British Geological Survey): Groundwater Quality: Uganda. Report, 4 pp., 2001b.
- BGS (British Geological Survey): Groundwater Quality: Burkina Faso, Report, 4 pp., 2002.
- BGS (British Geological Survey): Groundwater Quality: Nigeria. Report, 9 pp., 2003a.
- BGS (British Geological Survey): Groundwater Quality: Water Quality Fact Sheet: nitrate (Benin and Senegal). Produced for WaterAid. London: 6pp., 2003b.
- Böhlke, J.-K.: Groundwater recharge and agricultural contamination, *Hydrogeol. J.*, 10, 153–179, 2002.
- Bonetto, S., De Luca Domenico, A., Fornaro, M., and Lasagna, M.: Drinking and irrigation groundwater quality in Bulbule and Zway area (Ethiopia). Proceedings of EWRA 2005, 6th International Conference, Menton, France, Paper EWRA129, 16 pp., 2005.
- Bonsor, H. C. and MacDonald, A. M.: An initial estimate of depth to groundwater across Africa. British Geological Survey Open Report OR/11/067, 26 pp., 2011.
- Bordalo, A. A. and Savva-Bordalo, J.: The quest for safe drinking water: an example from Guinea-Bissau (West Africa), *Water Res.*, 41., 2978–2986, 2007.
- Bossa, A. Y., Diekkrüger, B., Giertz, S., Steup, G., Sintondji, L. O., Agbossou, E. K. and Hiepe, C.: Modeling the effects of crop patterns and management scenarios on N and P loads to surface water and groundwater in a semi-humid catchment (West Africa), *Agr. Water Manage.*, 115, 20–37, 2012.
- Boy-Roura, M., Nolan, B. T., Menció, A., and Mas-Pla, J.: Regression model for aquifer vulnerability assessment of nitrate pollution in the Osona region (NE Spain), *J. Hydrol.*, 505, 150–162, 2013.
- Brandvold, V.: Nitrate Pollution of the Thiaroye Aquifer in the Suburban Parts of the Dakar Region, Senegal, Using Chemical and Stable Isotope Analyses to Identify the Sources of Nitrate and the Processes at the Groundwater/Surface Water Interface. Thesis of Norwegian University of Science and Technology, Department of Geology and Mineral Resources Engineering, 133 pp., 2013.
- Bricha, S., Ounine, K., Oulkheir, S., El Haloui, N., and Attarassi, B.: Etude de la qualité physicochimique et bactériologique de la nappe phréatique M'nasra (Maroc), *Afr. Sci.*, 3, 391–404, 2007.
- Burow, K. R., Nolan, B. T., Rupert, M. G., and Dubrovsky, N. M.: Nitrate in groundwater of the United States, 1991–2003, *Environ. Sci. Technol.*, 44, 4988–4997, 2010.
- Burow, K. R., Jurgens, B. C., Belitz, K., and Dubrovsky, N. M.: Assessment of regional change in nitrate concentrations in groundwater in the Central Valley, California, USA, 1950s–2000s, *Environ. Earth Sci.*, 69, 2609–2621, 2013.
- Bushra, A. H.: Quantitative status, vulnerability and pollution of groundwater resources in different environmental and climatic

- contexts in Sardinia and in Ethiopia, PhD Thesis in Earth Science, 205 pp., 2011.
- Charfi, S., Zouari, K., Feki, S., and Mami, E.: Study of variation in groundwater quality in a coastal aquifer in north-eastern Tunisia using multivariate factor analysis, *Quat. Int.*, 302, 199–209, 2013.
- Chippaux, J.-P., Houssier, S., Gross, P., Bouvier, C., and Brissaud, F.: Étude de la pollution de l'eau souterraine de la ville de Niamey, Niger, *Bull. Soc. Pathol. Exot.*, 94, 119–123, 2002.
- Close, M.: Critical Review of Contaminant Transport Time Through the Vadose Zone. Environment Canterbury Technical Report, Report No. R10/113, 46 pp., 2010.
- Cobbina, S. J., Nyame, F. K., and Obiri, S.: Groundwater Quality in the Sahelian Region of Northern Ghana, West Africa, *Res. J. Environ. Earth Sci.*, 4, 482–491, 2012.
- Comte, J., Banton, O., Sambou, S., Travi, Y., and Ouedraogo, I.: L'aquifère des sables de la presqu'île de Dakar (Sénégal): état de la ressource et impacts anthropiques. Dix-huitièmes journées techniques du Comité Français d'Hydrogéologie de l'Association Internationale des Hydrogéologues, Ressources et gestion des aquifères littoraux, Cassis, 2012, 276–274, 2012.
- Coplen, T. B., Herczeg, A. L., and Barnes, C.: Isotope engineering – using stable isotopes of the water molecule to solve practical problems. *Environmental tracers in subsurface hydrology*, Springer, 79–110, 2000.
- Cronin, A. A., Pedley, S., Hoadley, A. W., Komou, F. K., Haldin, L., Gibson, J., and Breslin, N.: Urbanisation effects on groundwater chemical quality: findings focusing on the nitrate problem from 2 African cities reliant on on-site sanitation, *J. Water Health*, 5, 441–454, 2007.
- Dale, M. R. T. and Fortin, M.-J.: Spatial autocorrelation and statistical tests in ecology, *Ecoscience*, 9, 162–167, 2002.
- Dammo, M. N., Deborah, J. M., Yusuf, I. A., and Sangodoyin, A. Y.: Evaluation of ground water quality of konduga town, Nigeria. *Europ. Int. J. Sci. Technol.*, 2, 13–20, 2013.
- Dan-Hassan, M., Olasehinde, P., Amadi, A., Yisa, J., and Jacob, J.: Spatial and temporal distribution of nitrate pollution in groundwater of Abuja, Nigeria, *Int. J. Chem.*, 4, p. 104, 2012.
- Debernardi, L., and De-Luca, D. A., and Lasahna, M.: Correlation Between Nitrate Concentration in Groundwater and Parameters Affecting Aquifer Intrinsic Vulnerability, *Environ. Geol.*, 55, 539–558, 2007.
- Defourny, P., Kirches, G., Brockmann, C., Boettcher, M., Peters, M., Bontemps, S., et al.: Land cover CCI product user guide version 2, 2014.
- De Witte, I.: Characterization of the status of Dar es Salaam aquifer in view of salt-water intrusion and nitrate contamination. Master in de Geologie, Faculteit Wetenschappen Vakgroep Geologie en Bodemkunde, Universiteit Gent, 141 pp., 2012.
- Dibi, B., Konan-Waidhet, A. B., Konan F. K., Yao, C. S., Zilé, A. K., Savané, I., and Gnagri, D.: Characterization of the Origin of Pollutants in Groundwater from Biostatistical Tests: The Case of Catchment Ehania, South-Eastern Côte d'Ivoire, *J. Water Resour. Protect.*, 5, 1178–1185, doi:10.4236/jwarp.2013.512125, 2013.
- Diédhiou, M., Faye, S. C., Douf, O. C., Faye, S., Faye, A., Rev, V., Wohnlich, S., Wisotzky, F., Schulte, U., and Maloszewski, P.: Tracing groundwater nitrate sources in the Dakar suburban area: an isotopic multi-tracer approach, *Hydrol. Process.*, 26, 760–770, 2012.
- Djebebe-Ndjiguim, C. L., Huneau, F., Denis, A., Foto, E., Moloto-a-Kenguemba, G., Celle-Jeanton, H., Garel, E., Jaunat, J., Mabin-gui, J., and Le Coustumer, P.: Characterization of the aquifers of the Bangui urban area, Central African Republic, as an alternative drinking water supply resource, *Hydrol. Sci. J.*, 58, 1760–1778, doi:10.1080/02626667.2013.826358, 2013.
- Döll, P. and Fiedler, K.: Global-scale modeling of groundwater recharge, *Hydrol. Earth Syst. Sci.*, 12, 863–885, doi:10.5194/hess-12-863-2008, 2008.
- Douagui, A. G., Kouame, I. K., Koffi, K., Bi Goula, A. T., Dibi, B., Gone, D. L., Coulibaly, K., Seka, A. M., Kouassi, A. K., Oi Mangoua, J. M., and Savane, I.: Assessment of the bacteriological quality and nitrate pollution risk of Quaternary groundwater in the southern part of Abidjan District (Côte d'Ivoire), *J. Hydro Environ. Res.*, 6, 227–238, doi:10.1016/j.jher.2012.05.001, 2012.
- Drissa, S. T., Ernest, A. K., Marie-Solange, O. Y., Gbombélé, S., and Nagnin, S.: A Multivariate Statistical Analysis of Groundwater Chemistry Data in the Highest Bandama Basin at Tortiya (Northern Côte D'Ivoire), *Earth Resour.*, 1, 72–77, doi:10.12966/er.09.03.2013, 2013.
- Dungan, J. L., Perry, J. N., Dale, M. R. T., Legendre, P., Citron-Pousty, S., Fortin, M. J., Jakomulska, A., Miriti, M., and Rosenberg, M. S.: A balanced view of scale in spatial statistical analysis, *Ecography*, 25, 626–640, 2002.
- Dzwairo, B., Hoko, Z., Love, D., and Guzha, E.: Assessment of the impacts of pit latrines on groundwater quality in rural areas: A case study from Marondera district, Zimbabwe, *Phys. Chem. Earth*, 31, 779–788, 2006.
- Easa, A. and Abou-Rayan, A.: Domestic wastewater effect on the pollution of the groundwater in rural areas in Egypt. Fourteenth International Water Technology Conference, IWTC 14 2010, Cairo, Egypt, 909–923, 2010.
- Eblin, S. G., Soro, G. M., Sombo, A. P., Aka, N., Kambiré, O., and Soro, N.: Hydrochimie des eaux souterraines de la région d'Adiaké (Sud-Est côtier de la Côte d'Ivoire), *Larhyss J.*, 17, 193–214, 2014.
- Eckhardt, D. A. V. and Stackelberg, P. E.: Relation of groundwater quality to land use on long Island, New York, *Ground Water*, 33, 1019–1033, doi:10.1111/j.1745-6584.1995.tb00047.x, 1995.
- Edet, A., Nganje, T., Ukpong, A., and Ekwere, A.: Groundwater chemistry and quality of Nigeria: A status review, *Afr. J. Environ. Sci. Technol.*, 5, 1152–1169, 2011.
- Ekere, N. R.: Nitrates in rural communities water sources in Uzouwani, South eastern Nigeria, west Africa, *J. Environ. Res. Develop.*, 7, 600–606, 2012.
- El Bouqdaoui, K., Aachib, M., Blaghen, M. and Kholtei, S.: Modélisation de la pollution par les nitrates de la nappe de Berrechid, au Maroc, *Afr. Sci.*, 5, 99–113, 2009.
- El Hammoui, N., Sinan, M., Lekhlif, B., and El Mahjoub, L.: Évaluation de la qualité des eaux souterraines pour l'utilisation dans l'eau potable et l'agriculture : plaine de Tadla, Maroc, *Afr. Sci.*, 8, 54–66., 2012.
- El Hammoui, N., Naima, M., Lekhlif, B. and Lakhdar, M.: Use of multivariate statistical and geographic information system (GIS)-based approach to evaluate ground water quality in the irrigated plain of Tadla (Morocco), *Int. J. Water Resour. Environ. Eng.*, 5, 77–93, 2013.

- Engida, Z. A.: Groundwater study of Addis Ababa area, Report No. 01/93, 28 pp., 2001.
- FAO-SWALIM: Hydrogeological Survey and Assessment of Selected Areas in Somaliland and Puntland. Technical Report No. W-20, FAO-SWALIM (GCP/SOM/049/EC) Project, Nairobi, Kenya, 2012.
- Farjad, B., Mohamed, T., A., Wijesekara N., Pirasteh, S., and Shafri, H. Z. B. M.: Groundwater intrinsic vulnerability and risk mapping, *Proc. ICE*, 165, 441–450, 2012.
- Fedrigoni, L., Krimissa, M., Zouari, K., Maliki, A., and Zuppi, G. M.: Origine de la minéralisation et comportement hydrogéochimique d'une nappe phréatique soumise à des contraintes naturelles et anthropiques sévères : exemple de la nappe de Djebeniana (Tunisie), *C. R. Acad. Sci. Paris, Earth Planet. Sci.*, 332, 665–671, 2001.
- Fekkoul, A., Zarhloule, Y., Boughriba, M. Machmachi, I., and Chafi, A.: Contamination par les pesticides organochloreset les nitrates des eaux souterraines du système aquifère de la plaine des Triffa (Maroc Nord Oriental), *ScienceLib Editions Mersenne*, 3, 110801, 2011.
- Fetouani, S., Sbaa, M., Vanclooster, M., and Bendra, B.: Assessing ground water quality in the irrigated plain of Triffa (north-east Morocco), *Agr. Water Manage.*, 95, 133–142, 2008.
- Fianko, J. R., Osa, S., Adomako, D., and Achel, D. G.: Relationship between land use and groundwater quality in six districts in the eastern region of Ghana, *Environ. Monit. Assess.*, 153, 139–146, 2009.
- Focazio, M. J., Reilly, T. E., Rupert, M. G., and Helsel, D. R.: Assessing Ground-Water Vulnerability to Contamination: Providing Scientifically Defensible Information for Decision Makers, *USGS Circular*, 1224, 33 pp., 2002.
- Foster, S. S. D. and Crease, R. I.: Nitrate pollution of Chalk groundwater in East Yorkshire – a hydrogeological appraisal, *J. I. Water Eng.*, 28, 178–194, 1974.
- Friedel, M. J.: Inventory and Review of Existing PRISM Hydrogeologic Data for the Islamic Republic of Mauritania, Africa: U.S. Geological Survey, Open-File Report 2008-1138, 69 pp., 2008.
- Frind, E. O., Molson, J. W., and Rudolph, D. L.: Well vulnerability: a quantitative approach for source water protection, *Ground Water*, 44, 732–742, 2006.
- Gardner, K. K. and Vogel, R. M.: Predicting Ground Water Nitrate Concentration from Land Use, *Ground Water*, 43, 343–352, 2005.
- Gleeson, T., Moosdorf, N., Hartmann, J., and van Beek, L. P. H.: A glimpse beneath earth's surface: Global HYdrogeology MaPS (GLHYMPS) of permeability and porosity, *Geophys. Res. Lett.*, 41, 3891–3898, 2014.
- Greene, E. A., LaMotte, A. E., and Cullinan, K. A.: Ground-Water Vulnerability to Nitrate Contamination at Multiple Thresholds in the Mid-Atlantic Region Using Spatial Probability Models, *Scientific Investigations Reports* 2004-5118, 2004.
- Grimason, A. M., Beattie, T. K., Masangwi, S. J., Jabu, G. C., Taulo, S. C., and Lungu, K. K.: Classification and quality of groundwater supplies in the Lower Shire Valley, Malawi – Part 2: Classification of borehole water supplies in Chikhwawa, Malawi, *Water SA*, 39, 573–582, doi:10.4314/wsa.v39i4.1, 2013.
- Guideal, R., Bala, A. E., and Ikpokonte, E. A.: Physical and Chemical Quality of Groundwater in the Quaternary Aquifer in N'djamena Region, Chad Republic, *J. Appl. Sci. Res.*, 6, 1885–1890, 2010.
- Hall, M. D., Shaffer, M. J., Waskom, R. M., and Delgado, J. A.: Regional nitrate leaching variability: what makes a difference in Northeastern Colorado, *J. Am. Water Resour. Assoc.*, 37, 139–150, 2001.
- Hamza, M. H., Added, A., Francés, A., and Rodríguez, R.: Validité de l'application des méthodes de vulnérabilité DRASTIC, SINTACS et SI à l'étude de la pollution par les nitrates dans la nappe phréatique de Metline-Ras Jebel-Raf Raf (Nord-Est tunisien), *C. R. Geosci.*, 339, 493–505, 2007.
- Hanson, C. R.: Nitrate concentrations in Canterbury ground water – A review of existing data, Report no. R02/17. Environment Canterbury, 2002.
- Harbaugh, A. W., Banta, E. R., Hill, M. C., and McDonald, M. G.: MODFLOW-2000, The U.S. Geological Survey Modular Groundwater Model-User Guide to Modularization Concepts and the Groundwater and Flow process, Open-File Report 00-92, 121 pp., 2000.
- Hartmann, J. and Moosdorf, N.: The new global lithological map database GLiM: A representation of rock properties at the Earth surface. *Geochemistry, Geophysics, Geosystems*, 13, Q12004, doi:10.29/2012GC004370, 2012.
- Hassane, A. B.: Aquifères superficiels et profonds et pollution urbaine en Afrique: cas de la communauté urbaine de Niamey (Niger). These de Doctorat, Université Abdou Moumouni de Niamey, 198 pp. and annexes, 2010.
- Haylamicheal, D. and Moges, A.: Assessing water quality of rural water supply schemes as a measure of service delivery sustainability: A case study of WondoGenet district, Southern Ethiopia, *Afr. J. Environ. Sci. Technol.*, 6, 229–236, 2012.
- Helsel, D. R. and Hirsch, R. M.: Statistical Methods in Water Resources: Techniques of Water-Resources Investigations, Book 4, US Geological Survey, p. 522, Chapter A3, 1992.
- Hengl, T., Hengl, T., de Jesus, J. M., MacMillan, R. A., Batjes, N. H., Heuvelink, G. B. M., Ribeiro, E., Samuel-Rosa, A., Kempen, B., Leenaars, J. G. B., Walsh, M. G., and Gonzalez, M. R.: SoilGrids1km – Global Soil Information Based on Automated Mapping, *PLoS One*, 9, e105992, doi:10.1371/journal.pone.0105992, 2014.
- Hentati, I., Zaïri, M., and Ben Dhia, H.: A statistical and geographical information system analysis for groundwater intrinsic vulnerability: a validated case study from Sfax-Agareb, Tunisia, *Water Environ. J.* 25, 400–411, 2011.
- Hosmer, D. W. and Lemeshow, S.: Applied Logistic Regression, John Wiley and Sons, New York, NY, 307 pp., 1989.
- Idriss, H., Salih, I., and Sam, A. K.: Study of radon in ground water and physicochemical parameters in Khartoum state, *J. Radioanal. Nucl. Chem.*, 290, 333–338, 2011.
- Imoisi, O., Ayesanmi, A., and Uwumarongie-Ilori, E.: Assessment of groundwater quality in a typical urban settlement of resident close to three dumpsites in South-south, Nigeria, *J. Environ. Sci. Water Resour.* 1, 12–17, 2012.
- Ishaku, J. M.: Assessment of groundwater quality index for Jimeta-Yola area, Northeastern Nigeria, *J. Geol. Mining Res.*, 3, 219–231, 2011.
- Kahssay, G., Olivier, J., Ayenew, T., and Ramose, M.: Low Cost Sanitation and its impact on Quality of Groundwater in Addis Ababa, 19 pp., 2010.

- Kanyerere, T., Levy, J., Xu, Y., and Saka, J.: Assessment of microbial contamination of groundwater in upper Limphasa River catchment, located in a rural area of northern Malawi, *Water SA*, 38, 581–596, doi:10.4314/wsa.v38i4.14, 2012.
- Kaown, D., Hyun, H., Bae, G.-O., and Lee, K.-K.: Factors affecting the spatial pattern of nitrate contamination in shallow groundwater, *J. Geol. Mining Res.*, 36, 1479–1487, 2007.
- Kashaigili, J. J.: Assessment of groundwater availability and its current and potential use and impacts in Tanzania, final report, International Water Management Institute (IWMI), 58 pp., 2010.
- Keitt, T. H., Bjørnstad, O. N., Dixon, P. M., and Citron-Pousty, S.: Accounting for spatial pattern when modeling organism-environment interactions, *Echography*, 25, 616–625, 2002.
- Ketata, M., Gueddari, M., and Bouhlila, R.: Use of geographical information system and water quality index to assess groundwater quality in El Khairat deep aquifer (Enfidha, Central East Tunisia), *Arab. J. Geosci.*, 5, 1379–1390, 2011.
- Kihumba, A. M., Longo, J. N., and Vanclooster, M.: Modelling nitrate pollution pressure using a multivariate statistical approach: the case of Kinshasa groundwater body, Democratic Republic of Congo, *Hydrogeol. J.*, 1–13, 2015.
- Kinniburgh, D. G., Gale, I. N., Gooddy, D. C., Darling, W. G., Marks, R. J., Gibbs, B. R., Coleby, L. M., Bird, M. J., and West, J. M.: Denitrification in the unsaturated zones of the British Chalk and Sherwood Sandstone aquifers, British Geological Survey Technical Report, UK, WD/99/2, British Geological Survey Technical Report WD/99/2, 1994.
- Kissao, G. and Housséni, A.: Flooding and groundwater quality in a peripheral urban zone: the case of the district of Agoè-Zongo in Lomé, Togo. 4th AMMA International Conference, 2–6 July 2012, Toulouse, France, 23 pp., 2012.
- Kleinbaum, D. G., Kupper, L. L., and Muller, K. E.: Applied regression analysis and other multivariate methods (2nd ed.), PWS Publishing Co., Boston, 366 pp., 1988.
- Kleinbaum, D. G.: Logistic Regression, A Self-Learning Text, Springer-Verlag, Berlin, p. 282., 1994.
- Knobeloch, L., Salna, B., Hogan, A., Postle, J., and Anderson, H.: Blue babies and nitrate-contaminated well water, *Environmental Health Perspectives* 108, 675–678, 2000.
- Koklu, R., Sengorur, B., and Topal, B.: Water Quality Assessment Using Multivariate Statistical Methods – A Case Study: Melen River System (Turkey), *Water Resour. Manage.*, 24, 959–978, 2009.
- Kolpin, D. W.: Agricultural chemicals in groundwater of the Mid-western United States: relations to land use, *J. Environ. Qual.*, 26, 1025–1037, 1997.
- Kouame, K. J., Jourda, J. P., Saley, M. B., Deh, S. K., Anani, A. T., and Biémi, J.: Mapping of groundwater vulnerability zones to pollution in various hydrogeological environments of Côte d'Ivoire by DRASTIC method, *Int. J. Sci. Eng. Res.*, 4, 915–923, 2013.
- Kouassi, M. A., Yao, A. K., Ahoussi, E. K., Seki, C. L., Yao, A. N., Kouassi, I. K., and Biémi, J.: Apports des méthodes statistiques et hydrochimiques à la caractérisation des eaux des aquifères fissurés de la région du N'zi-Comoé (Centre-Est de la Côte d'Ivoire), *Int. J. Biol. Chem. Sci.*, 4, 1816–1838, 2010.
- Kouassi, M. A., Ahoussi, E. K., Koffi, B. Y., Ake, Y. A., and Biémi, J.: Caractérisation hydrogéochimique des eaux des aquifères fissurés de la zone Guiglo-Duekoué (Ouest de la Côte d'Ivoire), *Int. J. Biol. Chem. Sci.*, 6, 504–518, 2012.
- Kuitcha, D., Takounjou, A. L. F., and Ndjama, J.: Apport de l'hydrochimie et de l'isotope de l'environnement à la connaissance des ressources en eaux souterraines de Yaoundé, Cameroun, *J. Appl. Biosci.*, 67, 5194–5208, 2013.
- Kulabako, N., Nalubega, M., and Thunvik, R.: Study of the impact of land use and hydrogeological settings on the shallow groundwater quality in a peri-urban area of Kampala, Uganda, *Sci. Total Environ.*, 381, 180–199, 2007.
- Kyoung-Ho, K., Yun, S. T., Choi, B. Y., Chae, G. T., Joo, Y., Kim, K., and Kim, H.-S.: Hydrochemical and multivariate statistical interpretations of spatial controls of nitrate concentrations in a shallow alluvial aquifer around oxbow lakes (Osong area, central Korea), *J. Contamin. Hydrol.*, 107, 114–127, 2009.
- Labar, S., Hani, A., and Djabri, L.: Assessing groundwater contamination by hydrocarbons and heavy metals (Northeast of Algeria), *J. Environ. Res. Manage.*, 3, 17–21, 2012a.
- Labar, S., Hani, A., and Djabri, L.: Biochemical Approach to Assess Groundwater Pollution by Petroleum Hydrocarbons (Case Skikda Algeria), *J. Water Resour. Protect.*, 4, 493–496, 2012b.
- Ladekarl, U. L., Rasmussen, K. R., Christensen, S., Jensen, K. H., and Hansen, B.: Groundwater recharge and evapotranspiration for two natural ecosystems covered with oak and heather, *J. Hydrol.*, 300, 76–99, 2005.
- Laftouhi, N.-E., Vanclooster, M., Jalal, M., O. Witam, O., Aboufirassi, M., Bahir, M., and Persoons, É.: Groundwater nitrate pollution in the Essaouira Basin (Morocco), *C. R. Geosci.*, 335, 307–317, 2003.
- Lagnika, M., Ibikounle, M., Montcho, J. C., Wotto, V. D., and Sakiti, N. G.: Caractéristiques physico-chimiques de l'eau des puits dans la commune de Pobè (Bénin, Afrique de l'ouest), *J. Appl. Biosci.*, 79, 6887, 2014.
- Lamribah, A., Benajiba, M. H., Saoud, Y., Ahrikat, M., and Benzakour, M.: Impact de la pollution urbaine sur la contamination par les nitrates et les nitrites de la nappe phréatique de martil (Maroc), *Larhyss J.*, 14, 79–91, 2013.
- Laurent, M. and Marie, M. J.: Groundwater Quality of Southeastern Brazzaville, Congo, *J. Chem.*, 7, 861–869, 2010.
- Laurent, M., François, A., and Marie, M. J.: Assessment of groundwater quality during dry season in southeastern Brazzaville, Congo, *Int. J. Appl. Biol. Pharmaceut. Technol.*, 1, 762–769, 2010.
- Legendre, P.: Spatial autocorrelation: trouble or new paradigm?, *Ecology*, 74, 1659–1673, 1993.
- Legendre, P. and Fortin, M.-J.: Spatial pattern and ecological analysis, *Vegetation*, 80, 107–138., 1989.
- Liu, C. W., Wang, Y. B., and Jang, C. S.: Probability-based nitrate contamination map of groundwater in Kinmen, *Environ. Monit. Assess.*, 185, 10147–10156, 2013.
- Loko, S., Ke, A., and Biémi, J.: Anthropogenic Activities and the Degradation of the Environmental Quality in Poor Neighborhoods of Abidjan, Côte d'Ivoire: Abia Koumassi Village, *J. Environ. Protect.*, 4, 1099–1107, 2013a.
- Loko, S., Ahoussi, K. E., Koffi, Y. B., Kakou, N. F., Kouassi, A. M., and Biémi, J.: Microbiological and physico-chemical quality of groundwater from artisanal sites of mining exploitation in the South-West of Côte d'Ivoire: case of the area of Hiré, *Int. J. Sci. Eng. Res.*, 4, 567–574, 2013b.

- Longo, J. N.: Apport des outils hydrogéochimiques et isotopiques à la gestion de laquifère du mont Amba, Kinshasa/République Démocratique du Congo), Thèse en cotutelle internationale Académie d'Aix Marseille Université d'Avignon et des Pays de Vaucluse, Université de Kinshasa Faculté des Sciences Agronomiques, 203 pp., 2009.
- MacDonald, A.: Groundwater, health, and livelihoods in Africa. British Geological Survey ©NERC 2010 Earthwise 26, 2 pp., 2010.
- MacDonald, A. M., Bonsor, H. C., Dochartaigh, B. É. Ó., and Taylor, R. G.: Quantitative maps of groundwater resources in Africa, *Environ. Res. Lett.*, 7, 024009, 1–7, 2012.
- MacDonald, A. M., Taylor, R. G. and Bonsor, C. H. (Eds.): Groundwater in Africa – is there sufficient water to support the intensification of agriculture from “Land Grabs”, *Handbook of land and water grabs in Africa*, 376–383, 2013.
- Madioune, D. H., Faye, S. C., and Faye, S.: Etude de la vulnérabilité intrinsèque à la pollution de la nappe libre des sables quaternaires de thiaroye par la méthode DRASTIC, *J. Sci. Technol.*, 9, 1–11, 2011.
- Maherry, A., Clarke, S., Tredoux, G., and Engelbrecht, P.: Spatial and temporal analysis of the nitrate concentrations in groundwater for South Africa, 12 pp., available at: <http://hdl.handle.net/10204/3848> (last access: 15 June 2016), 2009.
- Mair, A. and El-Kadi, A. I.: Logistic regression modeling to assess groundwater vulnerability to contamination in Hawaii, USA, *J. Contam. Hydrol.*, 153, 1–23, 2013.
- Mande, S. A. S., Liu, M., Djaneye-Boundjou, G., Liu, F., Bawa, M. L., and Chen, H.: Nitrate in drinking water: A major polluting component of groundwater in gulf region aquifers, south of Togo, *Int. J. Phys. Sci.*, 7, 144–152, 2012.
- Masoud, A. A.: Spatio-temporal evaluation of the groundwater quality in Kafr Al-Zayat District, Egypt, *Hydrol. Process.*, 27, 2987–3002, 2013.
- Matini, L., Moutou, J. M., and Kongo-Mantono, M. S.: Evaluation hydro-chimique des eaux souterraines en milieu urbain au Sud-Ouest de Brazzaville, Congo, *Afr. Sci.*, 5, 82–98, 2009.
- Matini, L., Tathy, C., and Moutou, J. M.: Seasonal Groundwater Quality Variation in Brazzaville, Congo, *Res. J. Chem. Sci.*, 2, 7–14, 2012.
- Mattern, S. and Vanclooster, M.: Estimating travel time of recharge water through the unsaturated zone using transfer function model, *Environ. Fluid Mech.*, doi:10.1007/s10652-009-9148-1, 2009.
- Mattern S., Fasbender, D., and Vanclooster, M.: Discriminating sources of nitrate pollution in a sandy aquifer. *Journal of hydrology* 376:275–284., 2009.
- Mattern, S., Raouafi, W., Bogaert, P., Fasbender, D., and Vanclooster, M.: Bayesian Data Fusion (BDF) of monitoring data with a statistical groundwater contamination model to map groundwater quality at the regional scale, *J. Water Resour. Protect.*, 4, 929–943, doi:10.4236/jwarp.2012.41109, 2012.
- Mbewe, S.: Characterisation and temporal variability assessment of groundwater quality in petauke town, Eastern province, Zambia. Master of Science in Integrated Water Resources Management, Department of Geology, School of Mines, University of Zambia. 134 pp., 2013.
- McKenzie, J. M., Mark, B. G., Thompson, L. G., Schotterer, U., and Lin, P.-N.: A hydrogeochemical survey of Kilimanjaro (Tanzania): implications for water sources and ages, *Hydrogeol. J.*, 18, 985–995, 2010.
- Messameh, A., Benkhaled, A., and Achour, B.: Numerical Modelling of Groundwater Anthropic Pollution in Urban Area: Biskra City, Algeria, 13th International Conference on Urban Drainage, Sarawak, Malaysia, 7–12 September 2014, 6 pp., 2014.
- Mjemah, I. C.: Saltwater Intrusion and Nitrate Pollution in the Coastal Aquifer of Dar es Salaam, International Workshop, Tanzania, Rome, 22 April 2013, 31 pp., 2013.
- Mkandawire, T.: Quality of groundwater from shallow wells of selected villages in Blantyre District, Malawi, *Phys. Chem. Earth*, 33, 807–811, 2008.
- Mpakam, H. G., Kenmogne, G. R. K., Tatiétsé, T. T., Maire, E., Boeglin, J.-l., Ekodeck, G. E., and Dupré, B.: Étude des facteurs de pollution des ressources en eau en milieu urbain: cas de Bafoussam (Ouest-Cameroun), 27 pp., 2009.
- Mpenyana-Monyatsi, L. and Momba, M.: Assessment of groundwater quality in the rural areas of the North West Province, South Africa, *Sci. Res. Essay*, 7, 903–914, 2012.
- Mtoni, Y., Mjemah, I. C., Bakundukize, C., Van Camp, M., Martens, K., and Walraevens, K.: Saltwater intrusion and nitrate pollution in the coastal aquifer of Dar es Salaam, Tanzania, *Environ. Earth Sci.*, 70, 1091–1111, 2013.
- Muiuane, E.: The Quality of Groundwater in and around Maputo city, Mozambique. Department of Geology, Eduardo Mondlane University <http://www.waternetonline.ihe.nl/downloads/uploads/symposium/zambia2007/Water%20and%20Society/Muiuane.pdf> (last access: 13 August 2014), 11 pp., 2007.
- Musekiwa, C. and Majola, K.: Groundwater Vulnerability Map for South Africa, *SA J. Geomatics*, 2, 152–163, 2013.
- Nachiyunde, K., Ikeda, H., Tanaka, K., and Kozaki, D.: Evaluation of portable water in five provinces of Zambia using a water pollution index, *Afr. J. Environ. Sci. Technol.*, 7, 14–29, 2013.
- Nair, G. A., Bohjuari, J. A., Al-Mariami, M. A., Attia, F. A., and El-Touml, F.: Groundwater quality of north-east Libya, *J. Environ. Biol.*, 27, 695–700, 2006.
- Napacho, Z. A. and Manyele, S. V.: Quality assessment of drinking water in Temeke District (part II): Characterization of chemical parameters, *Afr. J. Environ. Sci. Technol.*, 4, 775–789, 2010.
- Nedaw, D.: Water Balance and Groundwater Quality of Koraro Area, Tigray, Northern Ethiopia, *MEJS*, 2, 110–127, 2010.
- Nelson, A.: African Population Database, UNEP GRID Sioux Falls, edited by: Nelson, A., African Population Database Documentation, retrieved on: 27 January 2011 from UNEP/GRID Sioux Falls, available at: <http://www.arcgis.com/home/item.html?id=9ec46c83ca5c47ebb1a25bd43131b483> (last access: 18 March 2015), 2004.
- Ngatcha, B. N. and Daira, D.: Nitrate pollution in groundwater in two selected areas from Cameroon and Chad in the Lake Chad basin, *Water Pol.*, 12, 722–733, 2010.
- Nkansah, M. A., Ofosuah, J., and Boakye, S.: Quality of groundwater in the Kwahu West district of Ghana, *Am. J. Sci. Indust. Res.*, 1, 578–584, 2010.
- Nolan, B. T.: Relating Nitrogen Sources and Aquifer Susceptibility to Nitrate in Shallow Groundwaters of the United States, US Geological Survey, 23 pp., 2001.
- Nolan, B. T. and Hitt, K. J.: Vulnerability of shallow groundwater and drinking-water wells to nitrate in the United States, *Environ. Sci. Technol.*, 40, 7834–7840, 2006.

- Nolan, B. T., Hitt, K. J., and Ruddy, B. C.: Probability of Nitrate Contamination of Recently Recharged Groundwaters in the Conterminous, *Environ. Sci. Technol.*, 36, 2138–2145, 2002.
- Nolan, B. T., Gronberg, J. M., Faunt, C. C., Eberts, S. M., and Belitz, K.: Modeling nitrate at domestic and public-supply well depths in the Central Valley, California, *Environ. Sci. Technol.*, 48, 5643–5651, 2014.
- Nougang, M. E., Nola, M., Djuikom, E., Euphrasie, O. V., Moun-gang, L. M. and Bessa, H. A.: Abundance of Faecal Coliforms and Pathogenic *E. coli* Strains in Groundwater in the Coastal Zone of Cameroon (Central Africa), and Relationships with Some Abiotic Parameters, *Curr. Res. J. Biol. Sci.*, 3, 622–632, 2011.
- Nwankwoala, H. O. and Udom, G. J.: Hydrogeochemical evaluation of groundwater in parts of Eastern Niger Delta, Nigeria, *J. Acad. Appl. Stud.*, 1, 33–58, 2011.
- Nyarko, A. A.: Assessment of groundwater quality and urban water provision: A case of Taifa township in the Ga-east district of the greater Accra region, Ghana, MSc Environmental Science, Kwame Nkrumah University of Science and Technology (KNUST), 72 pp., 2008.
- Obi, C. N. and George, P.: The Microbiological and Physico_chemical Analysis of Borehole waters used by Off-Campus Students of Michael Okpara University of Agriculture Umudite (MOUUAU), Abia-State, Nigeria, *Res. J. Biol. Sci.*, 6, 602–607, 2011.
- Obinna, N. C., Ezeabasili, A. C. C., and Okoro, B. U.: Assessment of ground water quality in Awka, Anambra state, Nigeria, *J. Environ. Sci. Water Resour.*, 3, 80–85, 2014.
- Obuobie, E. and Barry, B.: Groundwater in sub-Saharan Africa: Implications for food security and livelihoods, Ghana Country Status on Groundwater, final report, 48 pp., 2010.
- Ojuri, O. O. and Bankole, O. T.: Groundwater Vulnerability Assessment and Validation for a Fast Growing City in Africa: A Case Study of Lagos, Nigeria, *J. Environ. Protect.*, 4, 454–465, 2013.
- Olden, J. D., Lawler, J. T., and Poff, N. L.: Machine learning methods without tears: a primer for ecologists, *Quart. Rev. Biol.*, 83, 171–193, 2008.
- Oliveira, S., Oehler, F., San-Miguel-Ayaz, J., Camia, A., and Pereira, J. M. C.: Modeling spatial patterns of fire occurrence in Mediterranean Europe using Multiple Regression and Random Forest, *Forest Ecol. Manag.*, 275, 117–129, 2012.
- Omoboriowo, A. O., Chiaghanam, O. I., Soronadi-Ononiwu, G. C., Acra, E. J., Okengwu, K. O., Ugwueze, C. U., Yikarebogha, Y., and Momta, P. S.: Appraisal of the Groundwater Quality in Arochuku Area, Afikpo Basin, Nigeria, *Int. J. Sci. Technol.*, 2, 788–793, 2012.
- Ornguga, T. T.: Groundwater Quality Assessment and Sanitary Surveillance of Boreholes in Rural Areas in Benue State Of Nigeria, *Acad. J. Interdisc. Stud.*, 3, 153–158, 2014.
- Osemwegie, I., Oga, Y. M.-S., Ahoussi, K. E., Koffi, Y. B., Kouassi, A. M., and Biémi, J.: Influence of Anthropogenic Activities of Groundwater from Hand Dug Wells within the Precarious Settlements of Southern Abidjan, Côte d'Ivoire: Case of the Slums of Anoumabo (Marcory) and Adjouffou (Port-Bout), *J. Water Resour. Protect.*, 5, 427–439, 2013.
- Ouedraogo, I., Defourny, P., and Vanclooster, M.: Mapping the groundwater vulnerability for pollution at the pan-African scale, *Sci. Total Environ.*, 544, 939–953, 2016.
- Ouedraogo, I. and Vanclooster, M.: Shallow groundwater poses pollution problem for Africa, *Sci. Dev. Net*, 4 pp., 2016.
- Pavelic, P., Giordano, M., Keraita, B., Ramesh, V. and Rao, T.: Eds. Groundwater availability and use in sub-saharan Africa: a review of 15 countries. Colombo, Sri Lanka: International Water Management Institute (IWMI), 274 pp., 2012.
- Pineros-Garcet J. D., Ordonnez, A., Roosen, J., and Vanclooster, M.: Metamodelling: theory, concepts, and application to nitrate leaching modelling, *Ecol. Model.*, 193, 629–644, 2006.
- Potter, P., Ramankutty, N., Bennett, E. M., and Donner, S. D.: Characterizing the Spatial Patterns of Global Fertilizer Application and Manure Production, *Earth Interact.*, 14, 1–22, 2010.
- Prasad, A. M., Iverson, L. R., and Liaw, A.: Newer classification and regression tree techniques: bagging and random forests for ecological prediction, *Ecosystems*, 9, 181–199, 2006.
- Rawlings, J. O., Pantula, S. G., and Dickey, D. A.: Applied regression analysis, a research tool, Springer, 658 pp., 1998.
- R Development Core Team.: A language and environment for statistical computing, Vienna, R Foundation Statistical Computing, available at: <http://www.r-project.org/> (last access: 21 January 2015), 2015.
- Rim-Rukeh, A., Ikhifa, G. O., and Okokoyo, P. A.: Physico-chemical characteristics of some waters used for drinking and domestic purposes in the Niger Delta, Nigeria, *Environ. Monit. Assess.*, 128, 475–482, 2007.
- Rivett, M. O., Buss, S. R., Morgan, P., Smith, J. W. N., and Bement, C. D.: Nitrate attenuation in groundwater: a review of biogeochemical controlling processes, *Water Res.*, 42, 4215–4232, 2008.
- Rosillon, F., Savadogo, B., Kabore, A., Bado-Sama, H. and Dianou, D.: Attempts to Answer on the Origin of the High Nitrates Concentrations in Groundwaters of the Sourou Valley in Burkina Faso, *J. Water Resour. Protect.*, 4, 663–673, 2012.
- Rouabhi, A., Baali, F., Hani, A., and Djabri, L.: Impact des activités anthropiques sur la qualité des eaux souterraines d'un aquifère en zone semi-aride: Cas de la plaine de la Merdja, Nord Est de l'Algérie, *Sécheresse*, 20, 279–285, doi:10.1684/sec.2009.0199, 2009.
- Rouabhi, A., Baali, F., and Fehdi, C.: Impact of agricultural activity and lithology on groundwater quality in the Merdja area, Tebessa, Algeria, *Arab. J. Geosci.*, 3, 307–318, 2010.
- Sadek, M. and El-Samie, A. S.: Pollution vulnerability of the Quaternary aquifer near Cairo, Egypt, as indicated by isotopes and hydrochemistry, *Hydrogeol. J.*, 9, 273–281, 2001.
- Saffigna, P. G. and Keeney, D. R.: Nitrate and Chloride in Groundwater under irrigated agriculture in Central Wisconsin, *Groundwater*, 15, 170–177, 1997.
- Saidi, S., Bouri, S., and Ben Dhia, H.: Groundwater vulnerability and risk mapping of the Hajeb elma aquifer (Central Tunisia) using a GIS-based DRASTIC model, *Environ. Earth Sci.*, 59, 1579–1588, 2010.
- Salem, M. A. and Alshergawi, M. I.: Physico-chemical Evaluation of Drinking Water Quality in Alshati District of Libya, *IOSR J. Environ. Sci. Toxicol. Food Technol.*, 4, 41–51, 2013.
- Salim, L. H. M., Elhassan, B. M., and Elawad, M. A.: Physicochemical Analysis of Surface and Ground Water in Karrary Locality, Sudan, *Int. J. Sci. Eng. Technol. Res.*, 3, 436–438, 2014.

- Sall, M. and Vanclooster, M.: Assessing the well water pollution problem by nitrates in the small scale farming systems of the Niayes region, Senegal, *Agr. Water Manage.*, 96, 1360–1368, 2009.
- Sanok, F. M., Toriman, M. E. B., and Mokhtar, M.: Evaluation of Spatial and Temporal Variation in North East Jabal Al Hasawna wellfields Water quality, Libya, *Int. J. Adv. Agr. Environ. Eng.*, 1, 23–28, 2014.
- Saruchera, D. and Lautze, J.: Measuring Transboundary Water Cooperation: Learning from the Past to Inform the Sustainable Development Goals, IWMI, Working Paper 168, 20 pp., 2015.
- Sbargoud, S.: Validité de l'application de la méthode de vulnérabilité DRASTIC à l'étude de la pollution par les nitrates dans la Mitidja (Nord d'Algérie), *Geotunis*, 2013, 22 pp., 2013.
- Secunda, S., Collin, M., and Melloul, A. J.: Groundwater vulnerability assessment using a composite model combining DRASTIC with extensive land use in Israel's Sharon region, *J. Environ. Manage.*, 54, 39–57, 1998.
- Seeber, K., Daïra, D., Bala, A. M. and Vassolo, S.: Lake Chad Basin: Sustainable Water Management, Groundwater Quality Investigations in the Lower Logone Floodplain in April–May 2013, 47 pp., techn_rep07, available at: <http://www.cbtl.org/en/bgr-report?order=title&sort=asc> (last access: 3 September 2015), 2014.
- Semar, A., Saïbi, H., and Medjerab, A.: Contribution of multivariate statistical techniques in the hydrochemical evaluation of groundwater from the Ouargla phreatic aquifer in Algeria, *Arab. J. Geosci.*, 6, 3427–3436, 2013.
- Sharaky, A. M., Atta, S. A., El Hassanein, A. S., and Khallaf, K. M. A.: Hydrogeochemistry of groundwater in the western Nile Delta aquifers, Egypt. 2nd International Conference on the Geology of Tethys, 19–21 March 2007, Cairo University, 23 pp., 2007.
- Showers, W. J., Genna, B., McDade, T., Bolich, R., and Fountain, J. C.: Nitrate contamination in groundwater on an urbanized dairy farm, *Environ. Sci. Technol.*, 42, 4683–4688, 2008.
- Smahi, D.: Environmental Impact of Casablanca Landfill on Groundwater Quality, Morocco, *Int. J. Geosci.*, 4, 202–211, 2013.
- Smida, H., Abdellaoui, C., Zairi, M., and Dhia, H. B.: Cartographie des zones vulnérables à la pollution agricole par la méthode DRASTIC couplée à un Système d'information géographique (SIG): cas de la nappe phréatique de Chaffar(sud de Sfax, Tunisie), *Sécheresse*, 21, 131–146, 2010.
- Sophocleous, M.: GROUNDWATER RECHARGE, in *Groundwater*, edited by: Silveira, L., Wohnlich, S., and Usunoff, E. J., in *Encyclopedia of Life Support Systems (EOLSS)*, Developed under the Auspices of the UNESCO, Eolss Publishers, Oxford, UK, available at: <http://www.eolss.net> (last access: 3 September 2015), 2004.
- Sorichetta, A., Ballabio, C., Masetti, M., Robinson Jr., G. R., and Sterlacchini, S.: A comparison of data-driven groundwater vulnerability assessment methods, *Ground Water*, 51, 866–879, 2013.
- Sorlini, S., Palazzini, D., Sieliechi, J., and Ngassoum, M.: Assessment of Physical-Chemical Drinking Water Quality in the Logone Valley (Chad-Cameroon), *Sustainability*, 5, 3060–3076, 2013.
- Spalding, R. F. and Exner, M. E.: Occurrence of nitrate in groundwater – a review, *J. Environ. Qual.*, 22, 392–402, 1993.
- Stadler, S., Osenbrück, K., Knöller, K., Himmelsbach, T., Suckow, A., and Weise, S. M.: Origin of nitrate in groundwaters of Kalahari, Botswana. European Society for Isotope Research, Seggau, Austria, 27 June–1 July 2004, 3 pp., 2004.
- Stadler, S., Osenbrück, K., Knöller, K., Suckow, A., Sültenfuß, J., Oster, H., Himmelsbach, T., and Hötzel, H.: Understanding the origin and fate of nitrate in groundwater of semi-arid environments. *Journal of Arid Environments* 72(10): 1830–1842., 2008.
- Steichen, J., Koelliker, J., Grosh, D., Heiman, A., Yearout, R., and Robbins, V.: Contamination of farmstead wells by pesticides, volatile organics, and inorganic chemicals in Kansas, *Groundwater Monitoring Remediation*, 8, 153–160, 1988.
- Stevenson, F. J. and Cole, M. A.: Cycles of Soil Carbon, Nitrogen, Phosphorus, Sulfur, Micronutrients (2nd ed.), John Wiley and Sons Inc., 448 pp., 1999.
- Suthar, S., Bishnoi, P., Singh, S., Mutiyar, P. K., Nema, A. K., and Patil, N. S.: Nitrate contamination in groundwater of some rural areas of Rajasthan, India, *J. Hazard Mater.*, 171, 189–199, 2009.
- Tabue, Y. J. G., Feumba, R., Wethe, J., Ekodeck, G. E., and De, M. G.: Evaluation of Groundwater Suitability for Domestic and Irrigational Purposes: A Case Study from Mingoa River Basin, Yaounde, Cameroon, *J. Water Resour. Protect.*, 4, 285–293, doi:10.4236/jwarp.2012.45031, 2012.
- Tabue, Y. J. G., Ntamack, D., Feumba, R., Ngnikam, E., Wéthé, J., and Tanawa, É.: Vulnérabilité des eaux souterraines et périmètres de protection dans le bassin versant de la Mingoa (Yaoundé, Cameroun), *Revue de l'Université de Moncton*, 40, 71–96, 2009.
- Tadesse, N., Bheemalingeswara, K., and Abdulaziz, M.: Hydrogeological Investigation and Groundwater Potential Assessment in Haromaya Watershed, Eastern Ethiopia, *Mekelle University*, 2, 26–48, 2010.
- Tagma, T., Hsissou, Y., Bouchaou, L., Bouragba, L., and Boutaleb, S.: Groundwater nitrate pollution in Souss-Massa basin (south-west Morocco), *Afr. J. Environ. Sci. Technol.*, 3, 301–309, 2009.
- Taha, G. M. E. E.: Determination, Source Identification and GIS Mapping for Nitrate Concentration in Ground water from Bara Aquifer, B.Sc. Honor (Chemistry), Faculty of Science, University of Khartoum, 95 pp., 2010.
- Talabi, A. O.: Geostatistical Assessment of Groundwater Quality from coastal aquifers of Igbokoda, Southwestern Nigeria. *Journal Of Environmental Science, Toxicology And Food Technology (IOSR-JESTFT)* 2, 18–24, 2012.
- Tay, C. and Kortatsi, B.: Groundwater Quality Studies: A Case Study of the Densu Basin, Ghana, *West Afr. J. Appl. Ecol.*, 12, 18 pp., 2008.
- Tegegn, F. E.: Physico-chemical pollution pattern in Akaki River basin, Addis Ababa, Ethiopia. Master's thesis Physical Geography and Quaternary Geology, Stockholm University, 38 pp., 2012.
- Temgoua, E.: Chemical and Bacteriological Analysis of Drinking Water from Alternative Sources in the Dschang Municipality, Cameroon, *J. Environ. Protect.*, 2, 620–628, 2011.
- Tesoriero, A. J. and Voss, F. D.: Predicting the probability of Elevated Nitrate Concentrations in the Puget Sound-Basin, Implications for Aquifer Susceptibility and Vulnerability, *Ground Water*, 35, 1029–1039, 1997.
- Thayalakumaran, T., Charlesworth, P. B., Bristow, K. L., van Bemmelen, R. J., and Jaffres, J.: Nitrate and Ferrous Iron Concentration in the Lower Burdekin Aquifers: Assessing Denitrifica-

- tion Potential, SuperSoil 2004: 3rd Australian New Zealand Soils Conference, 5–9 December 2004, University of Sydney, Australia, 2004.
- Tilahun, K. and Merkel, B. J.: Assessment of groundwater vulnerability to pollution in Dire Dawa, Ethiopia using DRASTIC, *Environ. Earth Sci.*, 59, 1485–1496, 2010.
- Todd Engineers and Kennedy/Jenks Consultants: Revised Final Groundwater Vulnerability Study Santa Clara County, California, Project Report, 92 pp., October 2010.
- Totin, H. S. V., Boukari, M., Faye, S., Alassane, A., Orékan, V., and Boko, M.: Climate and Land Use Change Impacts on Groundwater Quality in the Beninese Coastal Basin of the Transboundary Aquifer System Benin-Nigeria-Togo. International Conference “Transboundary Aquifers: Challenges and New Directions” (ISARM2010), 6–8 December 2010, 4 pp., 2010.
- Totin, H. S. V., Amoussou, E., Odoulami, L., Edoth, P. A., Boukari, M., and Boko, M.: Groundwater pollution and the safe water supply challenge in Cotonou town, Benin (West Africa), *Proceedings of H04, IAHS-IAPSO-IASPEI Assembly, Gothenburg, Sweden, July 2013 IAHS Publ.* 361, 191–196, 2013.
- Trambauer, P., Dutra, E., Maskey, S., Werner, M., Pappenberger, F., van Beek, L. P. H., and Uhlenbrook, S.: Comparison of different evaporation estimates over the African continent, *Hydrol. Earth Syst. Sci.*, 18, 193–212, doi:10.5194/hess-18-193-2014, 2014.
- UNEP/DEWA.: Sanitation and Groundwater Protection – a UNEP Perspective UNEP/DEWA, http://www.bgr.bund.de/EN/Themen/Wasser/Veranstaltungen/symp_sanitatgwprotect/present_mmayi_pdf.pdf?__blob=publicationFile&v=2 (last access: 13 August 2014), 18 pp., 2014.
- US EPA (Environmental Protection Agency): Environmental indicators of water quality in the United States: Washington, D.C., US Environmental Protection Agency, Office of Water, EPA 841-R-96-002, 25 pp., 1996.
- Wakida, F. T. and Lerner, D. N.: Non-agricultural sources of groundwater nitrate: a review and case study, *Water Res.*, 39, 3–16, 2005.
- Wang, L., Stuart, M. E., Lewis, M. A., Ward, R. S., Skirvin, D., Naden, P. S., Collins, A. L., and Ascott, M.: The changing trend in nitrate concentrations in major aquifers due to historical nitrate loading from agricultural land across England and Wales from 1925 to 2150, *Sci Total Environ.*, 542, 694–705, 2016.
- Wheeler, D. C., Nolan, B. T., Flory, A. R., DellaValle, C. T., and Ward, M. H.: Modeling groundwater nitrate concentrations in private wells in Iowa, *Sci. Total Environ.*, 536, 481–488, 2015.
- Wiens, J. A.: Spatial scaling in ecology. *Funct. Ecol.*, 3, 385–397, 1989.
- Winkel, L., Berg, M., Amini, M., Hug, S. J., and Johnson, A. C.: Predicting groundwater arsenic contamination in Southeast Asia from surface parameters, *Nature Geosci.*, 1, 536–542, 2008.
- WHO (World Health Organization): Rolling Revision of the WHO Guidelines for Drinking-Water Quality. Draft for review and comments, Nitrates and nitrites in drinking-water, WHO/SDE/WSH/04.08/56: 133 pp., 2004.
- Worrall, F. and Besien, T.: The vulnerability of groundwater to pesticide contamination estimated directly from observations of presence or absence in wells, *J. Hydrol.*, 303, 92–107, 2005.
- Worrall, F., Howden, N. J. K., and Burt, T. P.: Evidence for nitrogen accumulation: the total nitrogen budget of the terrestrial biosphere of a lowland agricultural catchment, *Biogeochemistry*, 123, 411–428, doi:10.1007/s10533-015-0074-7, 2015.
- Wotany, E. R., Ayonghe, S. N., Fantong, W. Y., Wirmvem, M. J., and Ohba, T.: Hydrogeochemical and anthropogenic influence on the quality of water sources in the Rio del Rey Basin, South Western, Cameroon, Gulf of Guinea, *Afr. J. Environ. Sci. Technol.*, 7, 1053–1069, 2013.
- Xu, Y. and Usher, B.: Groundwater pollution in Africa, Taylor&Francis/Balkema, the Netherlands, 353 pp., 2006.
- Yang, C. Y., Cheng, M. F., Tsai, S. S., and Hsieh, Y. L.: Calcium, magnesium, and nitrate in drinking water and gastric cancer mortality, *Cancer Sci.*, 89, 124–130, 1998.
- Yao, T. K., Oga, M. S., Fouche, O., Baka, D., Pernelle, C., and Biemi, J.: Évaluation de la potabilité chimique des eaux souterraines dans un bassin versant tropical, Cas du Sud-Ouest de la Côte d’Ivoire, *Int. J. Biol. Chem. Sci.*, 6, 7069–7086, 2013.
- Young, C. P., Oakes, D. B., and Wilkinson, W. B.: Prediction of future nitrate concentrations in groundwater, *Ground Water*, 14, 426–438, 1976.
- Zghibi, A., Tarhouni, J., and Zouhri, L.: Assessment of seawater intrusion and nitrate contamination on the groundwater quality in the Korba coastal plain of Cap-Bon (North-east of Tunisia), *J. Afr. Earth Sci.*, 87, 1–12, 2013.
- Zingoni, E., Love, D., Magadza, C., Moyce, W., and Musiwa, K.: Effects of a semi-formal urban settlement on groundwater quality, *Phys. Chem. Earth*, 30, 680–688, 2005.