

Surface Topography: Metrology and Properties



TOPICAL REVIEW

Boundaries of tactile acuity when exploring surfaces

OPEN ACCESS

RECEIVED
24 February 2025

REVISED
26 May 2025

ACCEPTED FOR PUBLICATION
4 July 2025

PUBLISHED
21 July 2025

Original content from this work may be used under the terms of the [Creative Commons Attribution 4.0 licence](#).

Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.



Jenna Fradin¹ , Mariama Dione² , André Mouraux³, Rochelle Ackerley² and David Gueorguiev^{3,*}

¹ Institut des Systèmes Intelligents et de Robotique, Sorbonne Université, CNRS, Paris, France

² Aix Marseille Univ, CNRS, CRPN (Centre de Recherche en Psychologie et Neurosciences—UMR 7077), Marseille, France

³ Institute of Neuroscience (IONS), Université catholique de Louvain (UCLouvain), Brussels, Belgium

* Author to whom any correspondence should be addressed.

E-mail: david.gueorguiev@uclouvain.be

Keywords: touch, tactile acuity, sensory threshold, brain mechanisms

Abstract

Our sense of touch enables us to perform dexterous manipulation and to extract features of objects and textures along a large number of sensory dimensions. Tactile discrimination abilities vary greatly according to the body site, and is maximal in the hand; due to its significant role in our daily interactions and communication. A large number of studies have focused on the boundaries of tactile perception with the fingers, which are heavily involved in discriminative touch to distinguish both gross and fine features. In this review, we will explore interactions in which touch is extremely accurate and interactions that induce unprecise, illusory tactile perceptions, focusing mainly on the glabrous, non-hairy skin of the hand and fingers, due to its importance in interacting with the world. We compare the perception of tactile dimensions over various processes, including different dimensions in touch like roughness, stickiness, and texture, as well as the impact of exploring surfaces with more than one finger. We also cover the potential to include temperature in haptics and its importance in shaping tactile interactions. The research from perceptual studies in humans is compared in terms of neurophysiological studies and computational models of touch, where it is important to understand both peripheral and central coding of touch to apply the findings in haptic devices. Finally, we highlight where future work can add to knowledge and lead to tactile and haptic applications, such as in the clinical domain for better diagnostics, in industries like the cosmetic and car manufacturing sectors to improve consumer usage, and the extension into bio-inspired sensors for robotic sensing and e-skins.

1. Introduction

The sense of touch exhibits exquisite sensitivity to small displacements of the skin, where specialized mechanoreceptors capture a large variety of tactile inputs to elicit percepts such as roughness, softness, stickiness. The biomechanical properties of the skin and underlying tissues shape and attenuate mechanical contact, which is transformed into neural signals. Several types of mechanoreceptors exist, each with specific properties and sensitivities, which encode and transmit tactile information that is further processed through various central nervous system areas, like the cuneate nucleus, thalamus, somatosensory cortex, and other parietal and frontal cortical areas (figure 1). A puzzling aspect of this haptic touch system, possibly due to specialization, is that it excels in extracting some

features of touch such as differentiating surfaces based on micrometer differences while it can struggle to notice very large differences in other features of tactile cues. For example, the diameter of manipulated strings needs to be more than doubled to distinguish it from a [1]. These discrepancies in the sensory resolution that touch can achieve are best shown by the numerous illusions that can trick the sense of touch and provide valuable insights on how the afferent input conveyed by tactile receptors at different body parts shapes tactile perception.

This review explores and compares the boundaries of tactile acuity across sensory dimensions, from those that are very grossly conveyed by touch to those that exhibit astonishing sensitivity. We believe that a more systematic and complete understanding of these boundaries will make it easier for future research to

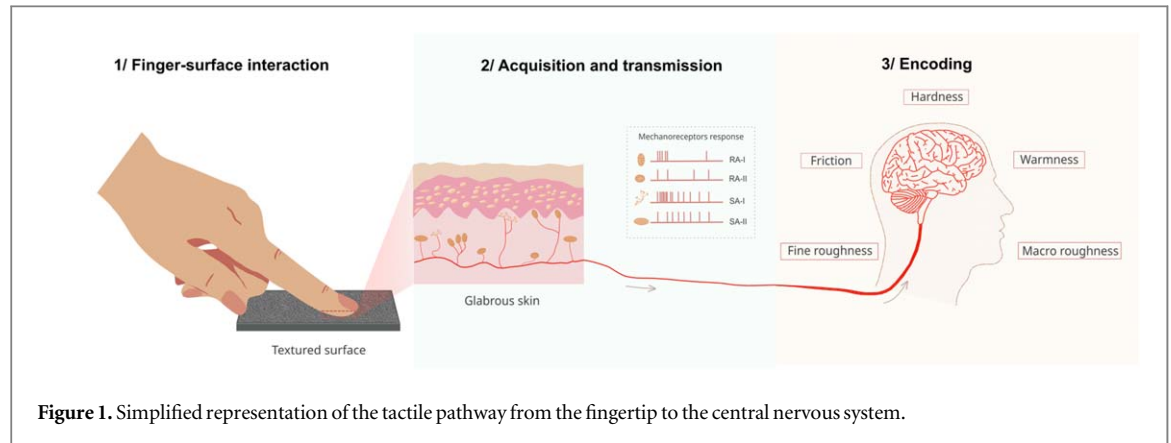


Figure 1. Simplified representation of the tactile pathway from the fingertip to the central nervous system.

identify the core computational mechanisms underlying the tactile sense. It is likely that evidence of these different percepts elicited on one hand by only tiny differences, and on the other, by the insensitivity to large variations in tactile input, will sum up to provide insights about which theories on the mechanisms of touch are still robust when evaluated against very specific perceptual phenomena. The present focus will be on the glabrous skin of the hand, an area densely innervated by mechanoreceptors, making it a key region for tactile perception that enables humans to discern subtle variations in texture, pressure, and vibration.

2. Perception of fine details through touch

Touch sensitivity is highly variable, both over the body and between individuals; however, naïve participants are remarkably efficient at finding an optimal exploration strategy to extract tactile cues that enables them to distinguish surface properties [2]. In this section, we explore specific cases in which tactile perception excels in discriminating differences, as well as perceptual tasks and tactile dimensions for which it displays a surprising lack of sensitivity.

2.1. Surface feature discrimination

A fundamental aspect of tactile perception is the ability to perceive and distinguish small surface features, including topographic details like ridges, bumps, and edges. This skill is essential in everyday life, such as to distinguish between different fabrics or material types, or for the successful exploration and manipulation of objects, and it relies largely on an almost immediate estimation of the properties of the object's surface.

Research has demonstrated the impressive precision of human tactile perception in detecting micro-scale features. Johansson and Vallbo [3] related the sensitivity of human hand mechanoreceptors with perceptual thresholds, finding that thresholds for tactile detection could be as low as 1 micrometer. Johansson and LaMotte [4] also observed that humans can detect edges as small as 0.85 micrometers, allowing for

precise identification of surface relief. Miyaoka *et al* [5] showed that humans can perceive surface variations as subtle as 2.4 to 3.3 micrometers, with tactile thresholds for detecting ridge height differences as low as 0.95 micrometers. Other studies have shown that the extent of tactile sensitivity reaches the nanometric scale. For instance, Skedung *et al* [6] demonstrated that humans can detect nanometer-scale geometric features on microscopic sinusoidal patterned surfaces and Loomis *et al* [7] showed that the motion direction of a 0.1 mm probe on the skin can be detected. Without motion that elicits vibratory or frictional phenomena, perception of surface features by an immobile finger is reduced, but remains sharp with a minimum detectable feature size of around 0.2 millimeters [8, 9].

In addition to detecting and discriminating fine surface features, humans excel at material discrimination, relying on their ability to perceive subtle surface variations. In everyday activities, such as distinguishing between different fabrics in clothing, individuals rely on tactile exploration to identify these materials quickly and accurately [8, 10, 11]. Hollins and Risner [12] and Miyaoka *et al* [5] demonstrated that individuals can perceive fine gradations in roughness across abrasive surfaces. Sahli *et al* [13] extended these findings by creating artificial surfaces with controlled roughness and observed that participants could discern differences in the Hurst roughness exponent as small as 0.2. The microgeometry of surfaces can also play an indirect role by enabling the perception of a slipping surface [14]. When it comes to intricate macroscopic tactile features, people can easily recognize hundreds of everyday objects by touch only [2].

Beyond surface topography, humans can distinguish other characteristics of the surfaces that they touch. Remarkably, smooth materials with very similar properties, such as plastic and glass [15], or plain paper [16], can be distinguished despite the absence of topographical differences. Recent studies have advanced this understanding by showing that humans can differentiate smooth surfaces based solely on variations of the surface chemistry [17, 18] by exploiting subtle differences in skin-surface adhesion.

On the contrary, humans exhibit rather poor performance at distinguishing certain tactile features. Surface features can be completely overshadowed by other tactile cues, such as the experienced lateral force [19]. It has also been shown that humans are incapable of distinguishing differences in the second order statistics of a 3D printed tactile pattern [20], which means that they can sense the average size of topographical features, but not their associated variance. Participants further show a rather poor performance at detecting differences in the randomness of embossed dots on a surface, especially when comparing more organized patterns [21]. In contrast with daily objects, humans also struggle to discriminate nonsense shapes printed on a flat surface [22], showing how expectation and recognition can influence touch perception.

2.2. Perception of tactile cues related to contact forces and elicited vibrations

The ability to perceive and finely adjust forces plays a critical role in tasks that require interactions with various surfaces, where slight changes in force can directly impact the tactile sensation of grip accuracy. Force regulation is dependent on tactile feedback and, for some tasks, the force applied has to be specific to enable subtle variations in surface characteristics to be detected [23, 24]. As a consequence, humans can sense small differences in applied force, down to the millinewton scale [25]. Similarly, Panarese and Edin [26] demonstrated that individuals could accurately detect and adapt to small directional changes in force, ranging from 7 to 10 degrees, when sliding a finger across a surface. This continuous force regulation is heavily dependent on tactile feedback, allowing for dynamic and responsive interactions with the environment. For instance, Westling and Johansson [27] showed that grip adjustments occur almost instantly in response to shifts in surface texture during object manipulation. Perception of softness also involves the processing of the applied force by comparing it to the resulting displacement of the surface [28–30]. When touching a soft material, like rubber, people gauge softness by estimating how much the material deforms under a given force, allowing them to detect the differences. Studies estimate the minimum detectable difference in stiffness at around $0.1\text{--}0.2\text{ N mm}^{-1}$ [31, 32].

Roughness perception entails the integration of both vibrational and pressure-based feedback. Judging a surface's roughness typically involves either sliding or pressing the fingertips into the surface. A rough surface generates uneven distribution of the applied force on the skin when touched and vibrations are elicited during movement. Vibrational sensing is particularly important in discerning fine textures with spatial periods below $200\text{ }\mu\text{m}$ [12, 33]. Through these vibrational and force signals, individuals can detect small features like fine ridges and minuscule bumps on a surface,


even when these features are on a near-microscopic scale. On the other hand, a recent study has shown that human tactile acuity for detecting missing tones from complex tactile vibrations that include several frequencies is generally quite low, especially for tones that are towards the high end of the waveform frequency spectrum [34]. This finding suggests that touch cannot rely on vibrations alone to distinguish complex tactile sceneries.

Increasing evidence suggests that surface friction, and its perceptual counterpart stickiness [23, 35, 36], also plays an important role in surface perception [15, 37]. Frictional cues are the mechanical cues generated when sliding a finger over a surface to explore it, with the skin stretching and sticking against the surface before initiating finger movement [15, 38]. Frictional cues inform us about the degree of lateral resistance of the surface against the skin, as quantified by the friction coefficient [23, 37] and which is widely used in physics to characterize basic features of surface properties. Research by Sahli *et al* [13] has shown that humans are very sensitive to small variations in surface friction, where participants can distinguish between surfaces whose coefficient of friction varies by only 0.035 during active touch. Gueorguiev *et al* [15] identified frictional forces experienced during the initial contact as a crucial factor in distinguishing flat surfaces, such as glass and plexiglass (figure 2). In the same vein, Skedung *et al* [39] reported that it is possible to successfully distinguish between flat materials that differ in several properties (i.e. the water contact angle or free energy), due to the molecular composition of their surface coating. Other studies have focused on the clingy aspect of stickiness perception with exploring it as skin detachment, to reveal how the former pressure required to provoke detachment as well as the pull-off itself impacted experienced sensations [40].

In contrast, frictional cues give only limited information in conveying more complex tactile features, such as two-dimensional shapes on a surface [41]. Mayet *et al* [1] showed that kinesthetic force in a close to real life scenario involving plucking strings differing in tension is more challenging than predicted by sensitivity in highly controlled experiments. Participants displayed a Weber fraction of 1.53 for string diameter discrimination and 0.4 for string tension discrimination. Moreover, perception of the pressure felt on the finger seems to be unidimensional, following the amplitude of the total force vector, rather than depending on its orientation [42].

2.3. Temperature perception

The ability to perceive temperature is an important aspect of touch. When a surface contacts the skin, there is often a thermal transfer that entails the heating or cooling of the skin. This interaction provides key information about the composition and characteristics

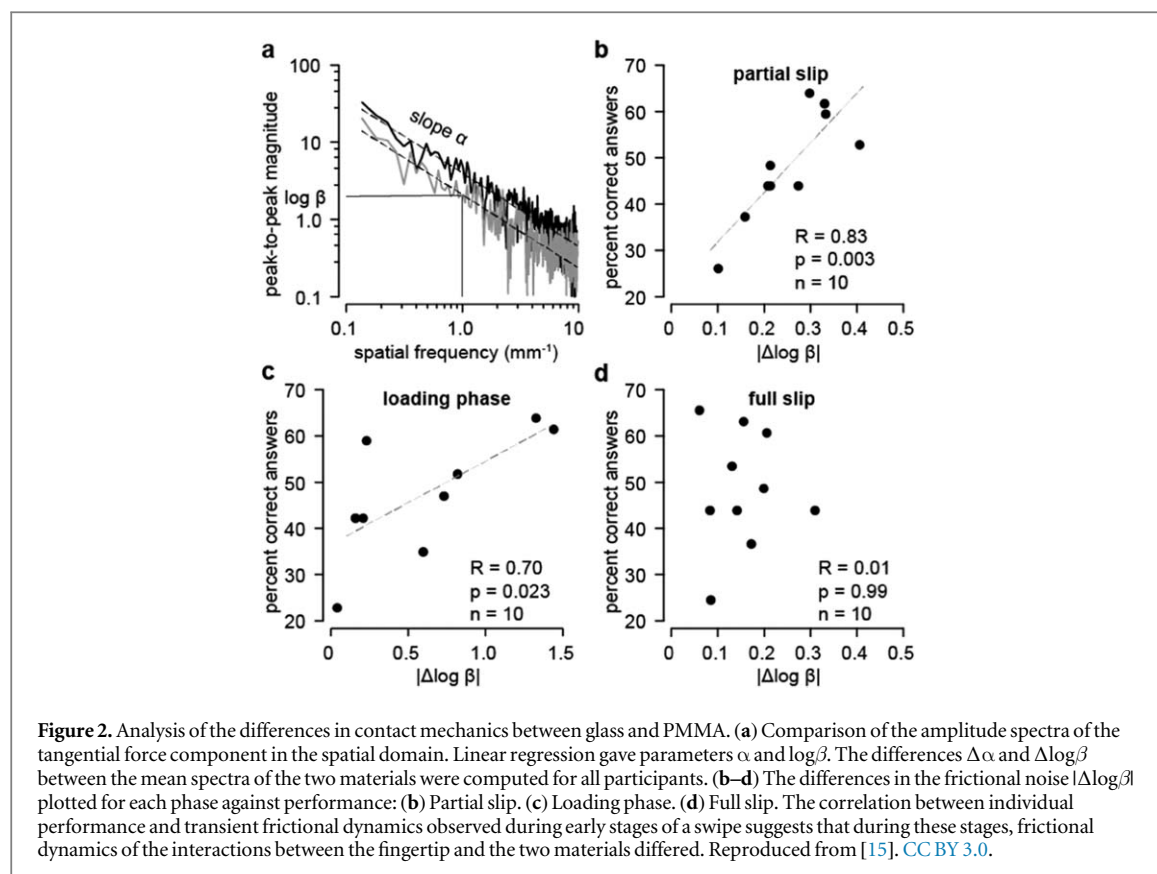

of surface materials. Thermal changes are detected by skin thermoreceptors, which encode variations in skin temperature and transmit the signals to the central nervous system, although some mechanoreceptors can be thermally-sensitive and nociceptors encode painful thermal sensations [43].

Humans are sensitive to changes in skin temperature, and are generally better at detecting transient cooling compared to warming of the skin surface [44], likely due to having more thermoreceptors for cold. Many factors influence temperature perception, including the initial temperature of the skin, thickness of the skin layers and their respective thermal properties, the density, sensitivity and conduction velocity of thermosensitive afferents, the temperature of the touched object, as well as its conductance/capacitance properties, and the area contacted. This can make concluding about temperature perception challenging and limit the generalizability of findings.

Temperature perception can vary by magnitudes over the body, with the upper half of the body being generally more sensitive to thermal changes than the lower half [44]. Temperature perception even varies over the hand, showing a proximal-distal increase in temperature sensitivity, where the region nearing the wrist being most sensitive [45]. Temperature sensitivity can be very precise, where rates above 0.1°C per second can be readily detected and a difference of 0.05°C from skin temperature can be perceived; however, very slow rates of change (e.g. <0.5°C per

minute) can remain undetected until around a 5°C deviation from skin temperature [46].

Humans can distinguish between materials using thermal cues [47–49]. The interaction between the hand and the material also affects discrimination performance [50, 51]. For effective material discrimination and identification, noticeable differences in thermal properties are required [52], but this ability diminishes when the material's temperature closely matches the skin's temperature, due to minimal heat transfer between the skin and the object [53].

Recognizing materials through thermal cues involves linking temperature changes felt during a contact to a mental representation of the material's properties [47]. Studies have explored material recognition using thermal displays that simulate materials through thermal cues [49, 54]. Recognition performance is influenced by various factors, such as the materials used and the temperature transient of the objects [55, 56]. Additionally, performance can vary with the number of fingers used in exploration, where recognition improves significantly when transitioning from single-digit to multi-digit exploration [50].

Table 1 provides an overview of human tactile acuity to surfaces features, tactile dimensions and temperature. Tactile acuity is commonly assessed using several psychophysical methods, including discrimination tasks (e.g. forced-choice task, odd-one-out), detection thresholds, recognition, similarity judgments and magnitude estimation. In the listed studies, tactile acuity is based on behavioral responses,

Table 1. Characteristics of studies on tactile acuity: stimuli type, performed task, and tactile threshold measurement.

Surface features					
Authors	Year	Stimulus	Modality	Task	Acuity
Loomis and Collins [7]	1978	Water-jet stimulation	Only tactile	Discrimination	Up to 75% correct shift discrimination with 0.1 mm probe
Johansson and LaMotte [4]	1983	Micro-textured surfaces	Only tactile	Detection	0.85 μm edge, 10 μm diameter
Lederman and Klatzky [2]	1985	Everyday objects	Only tactile	Recognition	Almost Perfect
Miyaoka <i>et al</i> [5]	1999	Abrasive papers	Only tactile	Discrimination	2.4 μm texture discrimination, 0.95 μm ridge height discrimination
Hollins and Risner [12]	2000	Abrasive papers	Only tactile	Discrimination/ Magnitude estimation	9 μm with motion, 100 μm without motion
Summers <i>et al</i> [16]	2008	Plain white paper	Only tactile	Odd-one-out	Up to 67% accuracy at distinguishing plain paper
Skedung <i>et al</i> [6]	2013	Nano-texture surfaces	Only tactile	Similarity of pairs	14 nm edge versus flat
Gueorguiev <i>et al</i> [15]	2016	Hydrophobic versus hydrophilic surfaces	Only tactile	Odd-one-out	Molecular bounds
Carpenter <i>et al</i> [17]	2018	Hydrophobic versus hydrophilic surfaces	Only tactile	Odd-one-out	Surface chemistry
Sahli <i>et al</i> [13]	2020	Micro-textured surfaces	Visual / Tactile	Similarity	Hurst roughness exponent of 0.2 for a difference in surface curvature of 0.8 mm^{-1}
Mayet <i>et al</i> [1]	2024	Strings	Only tactile	Odd-one-out	JND of 1.53 for string diameter
Tactile dimensions					
Cholewiak <i>et al</i> [31]	2008	Virtual surfaces	Only tactile	Magnitude estimation	0.1 N force magnitude, 0.2 N/mm stiffness magnitude
Karadogan <i>et al</i> [32]	2010	Virtual surfaces	Visual / Tactile	Discrimination	Average Weber fraction between 0.2–0.3 for stiffness discrimination
Panarese and Edin [26]	2011	3D force stimuli	Only tactile	Direction discrimination	Threshold at 7.1°
Gueorguiev <i>et al</i> [15]	2016	Hydrophobic versus hydrophilic surfaces	Only tactile	Odd-one-out	Up to 60% accuracy at distinguishing glass and PMMA
Skedung <i>et al</i> [39]	2018	Coated float glass	Only tactile	Similarity of pairs	Surface chemistry
Sahli <i>et al</i> [13]	2020	Micro-textured surfaces	Visual / Tactile	Similarity	0.035 in difference of friction coefficient
Mayet <i>et al</i> [1]	2024	Strings	Only tactile	Odd-one-out	JND of 0.4 for string tension discrimination
Le <i>et al</i> [34]	2024	Vibrotactile signals	Only tactile	Odd-one-out	Low acuity for discriminating missing tones in complex tactile vibrations
TEMPERATURE					
Erickson and Poulos [54]	1973	Thermal stimuli	Only tactile	Discrimination	Threshold of about 0.4°C–0.5°C
Dyck <i>et al</i> [52]	1974	Materials of varying thermal conductivity	Only tactile	Discrimination	Above chance discrimination of copper and steel
Darian-Smith and Johnson [46]	1977	Pulses	Only tactile	Discrimination	Smallest differentiated increment is 0.05°C
Steven and Cho [44]	1998	Simulated surfaces	Only tactile	Detection	Highest sensitivity in upper body
Jones and Berris [49]	2003	Material of varying thermal conductivity	Only tactile	Discrimination	Average thermal responses of 0.5°C
Yang <i>et al</i> [51]	2008	Real and simulated materials	Only tactile	Discrimination / identification	Comparable performance with real and simulated materials

participant verbally or manually report their answers. Physiological measurements is not the primary method in the research summarized here. The stimuli used ranged from highly controlled textures (nano or micro-patterned surfaces, abrasive papers) to everyday materials (e.g. paper, glass) as well as simulated or virtual stimuli that modulate force feedback or thermal properties. To reduce variability, most studies control tactile exploration using passive or guided active movement. Overall, table 1 illustrates the diversity of experimental designs and metric used to study human tactile acuity.

2.4. Multi-digit perception

Humans most often explore the surfaces and objects of their surrounding using several fingers. Compared to single-digit touch, multi-digit touch increases the quantity of incoming tactile information. Consequently, one could predict that multi-digit touch should improve tactile performance. This intuitive prediction is supported by several experimental measures of acuity. For example an improvement in tactile discrimination of about 15% was found in a review summarizing the results from 33 studies using the same type of stimulation [57]. However, the effect of multi-digit touch remains quite complex, with both positive and negative effects observed. This complexity is well illustrated in Braille reading, where some of the readers use multi-digit scanning to read Braille dots with positive effects [58–60]. On the negative side, a tendency to confuse the fingers is often reported in multi-digit readers. This effect is referred to as a ‘mislocalization’, which is an error in locating a tactile stimulus applied to the skin. For example, the participant responds finger B when asked to locate a tactile stimulation applied to finger A. Errors are typically restricted to the fingers that are routinely used to read, without affecting the other fingers [58]. It is unclear if this negative effect influences the reading itself through a confusion in the perceived letters. This phenomenon help to better understand the fundamental neurophysiological mechanisms at play, such as experience-driven cortical plasticity in the finger representations [61] whose effects are complex and multidetermined [62].

3. Neural coding of fine tactile features

The exquisite sensitivity of touch to specific features raises the question of the mechanisms that code them, which ranges from the induced effects on the skin to the computational principles underlying the processing in higher-level brain areas, through the activation of the vast and diverse populations of afferents. In the skin, there exist many different types of receptors that are sensitive to mechanical deformation. In the glabrous skin of the hands and feet, there are four main types of fast-conducting, myelinated mechanoreceptors,

namely fast-adapting types I (FA1, Meissner corpuscles) and II (FA2, Pacinian corpuscles) and slowly-adapting types I (SA1, Merkel cells) and II (SA2, Ruffini corpuscles), as comprehensively covered in the classic review by Vallbo and Johansson [63]. In the hairy skin that covers the majority of the body, Meissner corpuscles are not found, but we have the other types and, additionally, hair follicle afferents and field afferents that are all fast-conducting, myelinated mechanoreceptors [64]. There also exist low-threshold C-tactile fiber afferents that are unmyelinated and send their signals at a much slower speed to the brain. These are found densely in the hairy skin, especially on the upper body, and are thought to contribute more to positive affective touch signaling, rather than adding to the encoding of conscious, discriminative aspects of touch [65]. Recent literature [66] has shown that most stimuli, especially largely above threshold ones, activate all receptors. Nevertheless, it remains true that SA1 and SA2 are most sensitive to dynamic stimuli with variations around a few Hz, FA1 primarily respond to frequencies around 30–50 Hz, and Pacinian reach their peaks sensitivity around 250 Hz but also display an impressive sensitivity range (40–400 Hz) [67]. These properties probably influence the choice to model stimuli that rely on rather slow indentations through the SA activity while textures and vibratory signals, which exhibit rather high-frequency signals, are usually addressed by models mainly relying on Pacinian properties. We will not cover the exact properties of all these mechanoreceptors here, but they are well-documented in the above papers and for further information, Corniani and Saal [68] provide a detailed and comprehensive review of tactile afferents all over the body.

3.1. Spatial and temporal acuity of the tactile afferents

Our ability to distinguish feature differences between surfaces is not uniform across the body. The highest ability to discriminate small tactile features is observed on the glabrous skin of the hand, where the density of tactile afferents is the largest [68]. This ability varies across the hand, with the highest spatial resolution at the fingertips and a steady decrease towards the wrist [3]. Sensory threshold differences are even observed at different locations over the finger pad, which is most sensitive at its center [69]. High spatial information input enables precise exploration and discrimination of surface characteristics that coincides with the use of fingertips by primates to explore small features [70]. The spatial representation of tactile afferents’ activity efficiently encodes topographical elements at the millimeter scale [71]. Specific properties such as the anisotropy of the receptive field can encode higher-order features like edge orientation [72]. Transient cues such as the direction of a suddenly applied force can be extracted by the first spikes produced within a population of mechanoreceptors [73] and the precise

temporal encoding of dynamic stimuli, especially from the Pacinian corpuscles and Meissner corpuscles, complements the spatial encoding, more from Merkel cells, to allow the enhanced perception of complex surfaces, such as textures [74]. It is pertinent to further explore the role of these mechanoreceptors in encoding texture perception for perceptual dimensions other than roughness, e.g. stickiness, hardness [36]. Further to this, the role of Ruffini corpuscles is underexplored in tactile perception [75], where they likely play a relevant part in encoding surface friction, due to their sensitivity to skin stretch and pressure, especially concerning tangentially applied forces [36, 76].

3.2. Representation and acuity in the somatosensory cortex

Neural codes in the cortex are typically dedicated to higher-level features such as decoding tactile motion and shape that are mediated by cortical processes that integrate afferent activity over time and over receptor populations [66]. Interestingly, enlargement or shrinking of the size of the cortical areas representing limbs that are either overstimulated or deprived from sensory feedback have been observed in the human primary somatosensory cortex (S1) using neuroimaging methods, in the neurotypical population with overstimulation of the skin [77, 78], individuals to whom routine manual activities overstimulate their fingers such as Braille readers [59, 60], musicians [79], and individuals with sensory feedback deprivation, such as amputees [80, 81].

This plasticity phenomena were tested in studies with rats; enriching the tactile environment enlarges the size of the cortical areas coding tactile inputs [82], whilst increasing proprioceptive inputs reduces it, even though it enlarges the cortical areas coding proprioceptive inputs. Recently, active touch (i.e. through self-generated movements) has been proposed as a potential factor as well [83], based on the observation that cortical receptive fields were larger from active touch, compared to passive tactile stimulation. However, these findings remain difficult to interpret as the surfaces and numbers of fingers used to touch were different between the active and passive conditions [62].

Multiple factors can alter the size of a body area representation in S1 and it is challenging to disentangle these processes based only on the interpretation of the size of cortical representations. Furthermore, maladaptive effects have been described in populations demonstrating such plastic changes in the brain, which can be predictive of dystonia in musicians [84] or phantom pain in amputees [85]. Thus, it is still unclear which processes enhance tactile abilities and those that reduce or alter sensitivity. For example, blind people's tactile acuity clearly benefits from

cortical plasticity, which increases neuronal resources dedicated to the specific tactile tasks [86, 87].

Multi-digit stimulation can induce important cortical changes. Primary somatosensory regions of the brain normally represent the individual fingers in a somewhat segregated fashion, with respect to the somatotopy [88] and size of the representations at cortical level, as well as the size of their respective receptive fields on the skin. However, these can change after repeated intensive synchronous multi-digit stimulation, causing enlarging and fusing of the cortical representations of the fingers stimulated into either large cortical representations or enlarged and often multi-digit receptive fields [89, 90]. The effect is referred to as 'experience-driven' as it is restricted to the area of tactile stimulation [89]. It is also reversible, with passing time [90] or asynchronous stimulation [89].

3.3. Computational models of the acuity of touch

Computational models are powerful tools for understanding the mechanisms underlying tactile acuity. Models can provide a better understanding of how tactile features are extracted and how neural activation relates to perception, as such complex processes are often difficult to fully capture through experimental approaches alone.

Computational models can simulate the mechanics of the skin and the responses of tactile neurons. A first category of model was proposed to simulate the tactile properties of the hand and the response of the skin, afferents, and first-order neurons to stimuli such as contact with a rod or an edge [91]. To simulate the activity of single unit SA1 afferent, Gerling *et al* [92] focused on precisely modelling the distal phalanx, including its different skin layers and properties during static indentation. The TouchSim model by Saal *et al* [93] simplifies the considered skin properties to simulate the activity of population of afferents, including Pacinian corpuscles, in the entire hand, which enables the simulation of vibrational contact and the dynamics of the indentation with its tactile afferents. A further model proposed by Hay and Pruszynski [94] modeled the activity of first-order neurons through their many connections to afferents that constitute complex anisotropic receptive fields. These models fairly accurately reproduce the activity recorded in experiments, but face severe limitations in the kind of stimuli they can reproduce. For example, none of them can simulate lateral tactile motion or friction. The application to psychophysics also bears limitations since they do not account for cortical processing and the maximum resolution that could be extracted by afferent responses do not necessarily translate to the actual limits of human sensory abilities. Nevertheless, these models can set the plausible range for acuity hence inform future psychophysical studies. Gerling *et al* could reproduce Goodwin's results on curvature discrimination [95] but the 3 degrees resolution for

Table 2. Overview of computational models that aim to simulate neural activity or psychophysical dissimilarity. Grey shades represent the main focus of the proposed model.

	Skin Mechanics	Tactile Afferents	Primary Somatosensory Cortex	Higher-order Cognition	Outcomes
Gerling <i>et al.</i> , 2014 [92]					Neural Activity
Saal <i>et al.</i> 2017 [93]					
Hay and Pruszynski 2020 [94]					
Katic <i>et al.</i> 2023 [101]					
Foffani <i>et al.</i> 2008 [102]					
Detokaris <i>et al.</i> 2014 [103]					
Horch 1991 [104]					Psychophysics
Bensmaïa <i>et al.</i> 2005 [105]					
Senkow <i>et al.</i> 2019 [106]					
Lin and Park. 2023 [107]					
Le <i>et al.</i> 2024 [34]					

edge detection of Hay and Pruszynski outperforms the 12 degrees human accuracy for edge orientation discrimination [96].

These models have already enabled researchers to replicate the activity of tactile afferents in the glabrous skin when subjected to mechanical stimuli. The TouchSim model, for instance, has been used to simulate afferent responses to edges of different orientations [97] and to study how age-related changes in skin elasticity and afferent density impact tactile acuity [98–100]. Similar models have been developed to study tactile responses in other body parts. The FootSim model [101] simulates neural firing in the foot based on human microneurography data. It enables the reproduction of the temporal pattern of skin deformation to simulate realistic strides, even though it focuses on deformation in the normal direction only.

As discussed in section 3.2, computational modelling offers the possibility to test neurophysiological assumptions. For example, Foffani *et al* [102] used models to investigate the activity of neurons with small and large receptive fields, which correspond respectively to sharp and broad tuning curves, in the primary somatosensory cortex (S1).

Computational models can also leverage the sensory properties of tactile channels to reproduce and predict perceptual outcomes [108], such as codes that rely on the encoding of the signal's intensity [104] or on the specific activation elicited by each constitutive frequency of the signal [106, 109]. These models mainly simulate the responses of Pacinian channels to predict the psychophysical outcome. Recent work [107] has combined the four-channels theory with neural network training to predict the perceived dissimilarity of complex vibrations. Le *et al* [34] have suggested a simple empirical model that predicts whether missing tones will be noticed based on their ratio with the lowest frequency of the signal. When it comes to mechanical transmission of vibrations, Scheibert *et al* [110] designed a tactile sensor modeled on the human fingertip to investigate how epidermal ridges transmit


vibrations during contact with surfaces. Models that output neural activity rather focus on non-pacian systems while models that aim to directly predict perceived signal dissimilarity tend to focus on Pacinian responses. Le *et al* [34] proposed an empirical model whose biological mechanisms are still to be elucidated. Table 2 provides an overview of computational models and their main focus area.

However, these models only are valid for a limited range of stimuli and simulate in depth only a small part of the ascending sensory pathway. For example, no model accounts for lateral touch of surfaces. Moreover, those that focus on the peripheral mechanisms do not necessarily output the human perception but rather the maximum accuracy that could theoretically be achieved based on the elicited neural activity. Thus, beyond afferent responses, a more in depth understanding of the full chain of processes underlying sensations is needed to improve the model as well as interoperability between models that focus on different parts of the chain. Through iterative extensions, models of perception will ultimately be able to predict the boundaries of touch even for complex interactions and become an integral part of the development of devices capable of providing fine, precise tactile feedback, mimicking natural tactile sensation.

4. Haptic systems and application


4.1. Emerging technologies to study tactile acuity

Haptic technologies have the potential to push forward the limits of the types, precision and versatility of tactile features that can be generated by controlling precisely the parameters and tactile dimension of the signals or adjusting the range of stimuli, depending on the task or population evaluated (i.e. experts versus patients). Devices delivering vibrotactile stimulation [111] and force-feedback have been developed for three decades [112], but new categories of devices have recently been proposed. For example, devices relying on ultrasonic lubrication [113] can generate programmable variations in friction on a surface depending on

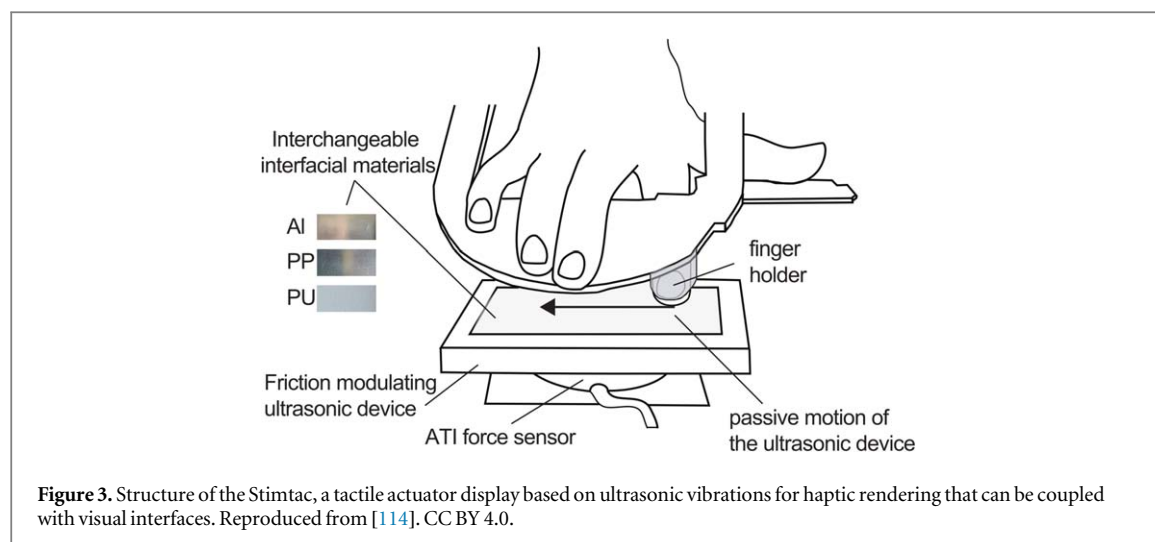

the contact location and can be coupled with visual feedback on the display (figure 3). One can alternate bands with and without modulated friction to simulate tactile gratings. Each abrupt change in friction can be programmed regarding its amplitude, sharpness, and duration, thus providing a wide range of possibilities for creating stimuli. The device has proven to be efficient for studying the fundamental aspects underlying the perception of friction [114, 115] and the human peripheral neural code corresponding to periodic changes in friction levels [116] (figure 4). This type of haptic stimulation has the potential to detect changes in tactile sensitivity, such as those occurring with ageing [117]. Limitations exist as well. In Dione *et al* [116], the maximal friction reduction that the device can achieve was shown to be smaller than what is measured in more ecological situations, such as when an object slips from the fingers. It was also discussed that the frequency up to which changes in friction can be induced on the skin might be limited to 60 Hz, due to skin viscoelastic properties, potentially limiting the possibility of simulating very fine gratings using this device, due to its inherent constraints. There is great interest in developing devices that can be used with several fingers, for example, to enable blind individuals to read from their phone, and, overall, to increase accessibility to content through the tactile channel. Some applications already enable multiple finger use [118], and others are being developed [119, 120]. Some devices provide an active lateral force along the direction of movement, making it possible to feel actual forces on the finger and changes in lateral forces even with a stationary finger [121].

Similar stimulations can be achieved by electro-adhesion-based haptic devices, which modulate electrostatic forces between the skin and a surface to create controllable friction variations. Devices based on electro-adhesion can also be used to mimic the frictional properties of various textures or surfaces, making them valuable tools for investigating tactile discrimination threshold [122].

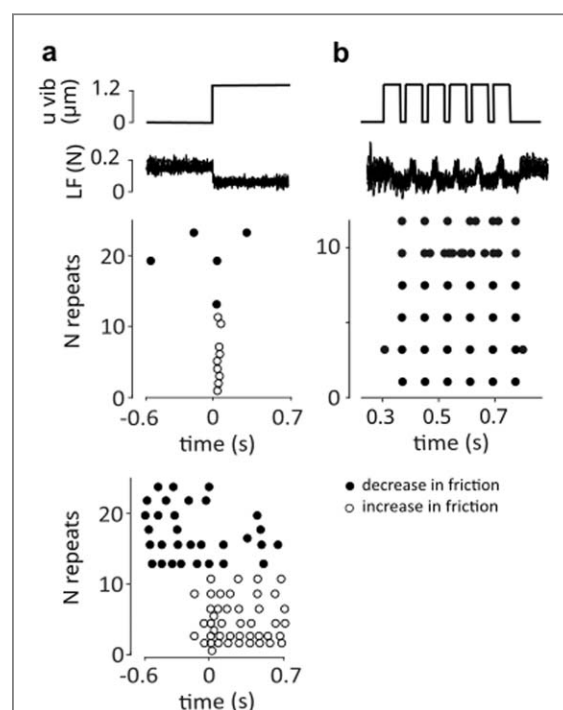

Mid-air haptic devices have also been proposed and can be used as a novel tool for studying tactile acuity. They can stimulate tactile feedback on the skin without direct contact, by using pressurized acoustic waves [123, 124]. This technology enables specific

sensations to be targeted and stimulated, as well as to dissociate the tactile and kinesthetic components of touch. For example, spatial acuity is usually assessed using a two-point discrimination test with skin indentation, but this method is often reliable. Mid-air haptics have been used to overcome problems associated with the variability in manually-applied tactile stimuli, having novel characteristics that cannot be obtained with traditional tests [125].

Despite these advancements, challenges remain since the power and resolution of mid-air haptic stimulation is still limited, making it difficult to replicate fine surface details [124]. Similarly, the perception of electro-adhesion and ultrasonic lubrication devices may suffer from variation in perception due to differences in skin moisture or impedance [122]. Still, emerging haptic technologies offer promising perspectives for investigating tactile acuity. By integrating new approaches, these technologies enable us to gain a deeper understanding of the underlying mechanisms involved in tactile processing.

4.2. Applications of tactile acuity mechanisms

Tactile acuity is of a great interest to the medical field and its related applications. Tactile acuity tests are performed as part of many medical procedures, such as to assess the extent of injury of a body part or in tests of functional loss, as found in the extremities with diabetes. Standard approaches included in quantitative sensory testing (QST), such as the detection of monofilaments delivering different forces and detecting vibrations [126], are useful, especially considering normative and comparative values between different groups, but these tests have little-evolved and newer technology could improve their accuracy and ease of application, as well as allowing testing at home in an automatic way. Further, QST focuses on understanding the underlying mechanisms in painful conditions, yet tactile disturbances can occur without pain (e.g. in aging, in psychiatric disorders) and require finer tactile tests, including a wide range of stimulus intensity to account for both loss of tactile function and hypersensitivity [127, 128]. Beyond the precise recognition of specific tactile features, some diseases induce intolerance to touch (tactile allodynia) that could come from an over-sensitivity to certain tactile dimensions or elements. In that respect, a better knowledge of people's sensory profile could be explored to provide solutions to these conditions [129]. It is known that tactile acuity within several tactile dimensions decreases with age [130] especially in the glabrous skin of the fingers [128, 131]. It is also well-known that there is a serious decrease in tactile acuity of the feet with age [132], which could cause falls. Consequently, preservation of tactile sensations, such as friction or vibrotactile cues, in addition to skin appearance, has become a goal of the next generation of the cosmetic and health industries [133]. The

cosmetics industry may especially be able to take advantage of haptic developments in the use of tools for self-care and in massage, to give a more relaxing and positive experience.

Manufactured surfaces in cars are less and less made from natural materials, but rather feature plastic that mimics textures like wood and leather [134]. Knowledge of whether human touch can be tricked to feel an engineered material, (e.g. chrome or lacquered wood), is a key interest for many consumer products [135]. Similarly, manufacturers of haptic devices need to consider tactile acuity to avoid under-engineering devices that deliver a poor tactile experience or over-engineered devices that display a resolution that is far above that of touch.

Another application of the principles of discriminative touch are bio-inspired sensors. A recent study shows how small actuator technology can be used in a dynamic way to stimulate different mechanoreceptor classes preferentially and combine stimuli to provide more complex, realistic tactile features, including opening up the possibility to stimulate various body parts simultaneously for a more immersive experience [136]. Research has also developed in the application of biologically-inspired skins, where these could be applied to improve robotic sensing [137] and in the improvement of neuroprostheses [138]. A further example is the investigation of the computational principles behind the phenomenon of tactile hyperacuity, in which tactile resolution goes beyond the resolution stemming from afferent density [7]. The computational principles of this occurrence of super resolution have been studied and have already inspired a new generation of optical and tactile sensors [139].

5. Discussion and conclusion

Scientific literature on the human capacity to distinguish challenging tactile features shows both occurrences of exquisite sensitivity, as well as surprising limitations. This discrepancy likely stems from the fundamental structuring of the sense of touch, but the type of haptic exploration and learning mechanisms can also impact acuity. Recent studies have shown that optimal exploration strategy improves the capacity to sense subtle features [140–142]. Tactile discrimination skills can also be improved through prior experience with the stimuli [2] or practice. For example, Ragert *et al* [143] found significantly better tactile acuity in professional pianists, compared to controls, and found a relationship between tactile acuity and the extent of piano playing. Hughes *et al* [144] reported that training could enhance sensitivity to subtle changes, with participants showing improved accuracy in categorizing dotted surfaces after training. This adaptability is particularly evident in Braille readers, who, through daily practice, develop heightened tactile

acuity and an enlarged somatosensory representation of the fingers used for reading [60, 145].

Although some studies leave participants free to explore as they wish and control for learning curves, most scientific experiments exhibit constraints due to the setup complexity or the reasonable duration of a study. Typically, studies test the tactile acuity resulting from a specific finger-surface interaction, sometimes in passive touch, and are often not able to implement enough different conditions to probe stronger hypotheses on the underlying computational and neurological mechanisms. To this date, experimental procedures that enable data to be easily compared between experiments have only been partly achieved only for the study of vibrotactile perception [146].

As a consequence, optimal exploration strategies and speeds that are observed in tasks specifically designed to highlight them are rarely witnessed in studies on the accuracy of touch, and some cues might be better detected in tasks that are more optimal at fostering the detection of very small differences. Moreover, data are still limited to truly understand the mechanisms underlying the perception of important tactile dimensions like friction and compliance. The physical phenomena underlying the cues related to these dimensions are multiple and even small differences in the experimental procedure make it difficult to compare the results of different studies. As a consequence, the neural processing of these phenomena has to be modeled on scarce or disparate data. For friction, an initiative has started with the STIMTAC device that was used in several studies, which made them more comparable, but the number of manufactured devices remains limited and not as widespread as vibrotactile actuators, which are industrial products. In the same vein, no standards exist to reliably modulate temperature in experiments.

In this context, the boundaries of tactile acuity are particularly informative since they highlight conditions of clear limitations or successes of the tactile system in rather compact experiments. We believe that it is essential to use and extend these findings in future studies with comparable experimental setups to better define these psychophysical limits and the computational and biological mechanisms that underlie the tactile sensations elicited in these discrimination tasks.

Acknowledgments

This study was funded by the European Union (ERC, TANGO, 101117300). Views and opinions expressed are however those of the authors only and do not necessarily reflect those of the European Union or the European Research Council. Neither the European Union nor the granting authority can be held responsible for them.

Data availability statement

No new data were created or analysed in this study.

Authors contributions

JF, MD, AM, RA, and DG designed the review plan. JF, MD, and DG drafted the manuscript. JF, MD, AM, RA, and DG edited the paper.

ORCID iDs

Jenna Fradin  <https://orcid.org/0000-0002-1970-6279>

Mariama Dione  <https://orcid.org/0000-0001-8308-9378>

David Gueorguiev  <https://orcid.org/0000-0002-2833-0437>

References

- [1] Mayet M, Carrou J-L L and Gueorguiev D 2024 Haptic sensitivity to diameter and tension during string plucking *IEEE Haptics Symposium (HAPTICS) 2024 (IEEE)* 19–24
- [2] Klatzky R L, Lederman S J and Metzger V A 1985 Identifying objects by touch: an 'expert system' *Perception & Psychophysics* **37** 299–302
- [3] Johansson R S and Vallbo A B 1979 Tactile sensibility in the human hand: relative and absolute densities of four types of mechanoreceptive units in glabrous skin *The Journal of Physiology* **286** 283–300
- [4] Johansson R S and Lamotte R H 1983 Tactile Detection Thresholds for a Single Asperity on an Otherwise Smooth Surface *Somatosensory Research* **1** 21–31
- [5] Miyaoka T, Mano T and Ohka M 1999 Mechanisms of fine-surface-texture discrimination in human tactile sensation *J. Acoust. Soc. Am.* **105** 2485–92
- [6] Skedung L, Arvidsson M, Chung J Y, Stafford C M, Berglund B and Rutland M W 2013 Feeling small: exploring the tactile perception limits *Sci Rep.* **3** 2617
- [7] Loomis J M and Collins C C 1978 Sensitivity to shifts of a point stimulus: an instance of tactile hyperacuity *Perception & Psychophysics* **24** 487–92
- [8] Hollins M, Bensmaïa S, Karlof K and Young F 2000 Individual differences in perceptual space for tactile textures: evidence from multidimensional scaling *Perception & Psychophysics* **62** 1534–44
- [9] Bensmaïa S J and Hollins M 2003 The vibrations of texture *Somatosensory & Motor Research* **20** 33–43
- [10] Picard D, Dacremont C, Valentin D and Giboreau A 2003 Perceptual dimensions of tactile textures *Acta Psychologica* **114** 165–84
- [11] Callier T, Saal H P, Davis-Berg E C and Bensmaïa S J 2015 Kinematics of unconstrained tactile texture exploration *Journal of Neurophysiology* **113** 3013–20
- [12] Hollins M and Risner S R 2000 Evidence for the duplex theory of tactile texture perception *Perception & Psychophysics* **62** 695–705
- [13] Sahli R, Prot A, Wang A, Müser M H, Piovarči M, Didyk P and Bennewitz R 2020 Tactile perception of randomly rough surfaces *Sci Rep.* **10** 15800
- [14] Srinivasan M A, Whitehouse J M and LaMotte R H 1990 Tactile detection of slip: surface microgeometry and peripheral neural codes *Journal of Neurophysiology* **63** 1323–32
- [15] Gueorguiev D, Bochereau S, Mouraux A, Hayward V and Thonnard J-L 2016 Touch uses frictional cues to discriminate flat materials *Sci Rep.* **6** 25553

- [16] Summers I R, Irwin R J and Brady A C 2008 Haptic discrimination of paper *Human Haptic Perception: Basics and Applications* ed M Grunwald (Birkhäuser) 525–35
- [17] Carpenter C W, Dhong C, Root N B, Rodriguez D, Abdo E E, Skelil K, Alkhadra M A, Ramirez J, Ramachandran V S and Lipomi D J 2018 Human ability to discriminate surface chemistry by touch *Mater. Horiz.* **5** 70–7
- [18] AliAbbasi E, Aydingul V, Sezin A, Er U, Turkuz S and Basdogan C 2023 Tactile Perception of Coated Smooth Surfaces *IEEE Trans. Haptics* **16** 586–93
- [19] Robles-De-La-Torre G and Hayward V 2001 Force can overcome object geometry in the perception of shape through active touch *Nature* **412** 445–8
- [20] Kuroki S, Sawayama M and Nishida S 2021 The roles of lower- and higher-order surface statistics in tactile texture perception *Journal of Neurophysiology* **126** 95–111
- [21] Ziat M, Pacic K, Buenteello I, Varney J and Newell F N 2023 Tactile perception of randomness: effect of varying stimulus size and participants age *i-Perception* **14** 20416695231214954
- [22] Cashdan S 1968 Visual and haptic form discrimination under conditions of successive stimulation *Journal of Experimental Psychology* **76** 215–8
- [23] Smith A M and Scott S H 1996 Subjective scaling of smooth surface friction *Journal of Neurophysiology* **75** 1957–62
- [24] Lederman S J and Klatzky R L 2009 Haptic perception: a tutorial *Attention, Perception & Psychophysics* **71** 1439–59
- [25] Doshier J A and Hannaford B 2002 Detection thresholds for small haptic effects *Proc. SPIE 4570 Telemanipulator and Telepresence Technologies VIII* 4570 ed M R Stein (SPIE) 50–9
- [26] Panarese A and Edin B B 2011 Human ability to discriminate direction of three-dimensional force stimuli applied to the finger pad *Journal of Neurophysiology* **105** 541–7
- [27] Westling G and Johansson R S 1984 Factors influencing the force control during precision grip *Exp. Brain Res.* **53**
- [28] Srinivasan M A and LaMotte R H 1995 Tactual discrimination of softness *Journal of Neurophysiology* **73** 88–101
- [29] Jones L A and Hunter I W 1990 A perceptual analysis of stiffness *Exp. Brain Res.* **79** 150–6
- [30] LaMotte R H 2000 Softness discrimination with a Tool *Journal of Neurophysiology* **83** 1777–86
- [31] Cholewiak S A, Tan H Z and Ebert D S 2008 Haptic identification of stiffness and force magnitude *Symposium on Haptic Interfaces for Virtual Environment and Teleoperator Systems* (IEEE) 87–91
- [32] Karadogan E, Williams R L, Howell J N and Conatser R R 2010 A stiffness discrimination experiment including analysis of palpation forces and velocities *Simulation in Healthcare: The Journal of the Society for Simulation in Healthcare* **5** 279–88
- [33] Hollins M and Bensmaïa S J 2007 The coding of roughness *Canadian Journal of Experimental Psychology/Revue canadienne de psychologie expérimentale* **61** 184–95
- [34] Le T S, Bailly G, Vezzoli E, Auvray M and Gueorguiev D 2024 Tactile sensitivity to missing tones in complex vibrotactile signals *Journal of Neurophysiology* **132** 1943–54
- [35] Hollins M, Seeger A, Pelli G and Taylor R 2004 Haptic perception of virtual surfaces: scaling subjective qualities and interstimulus differences *Perception* (<https://doi.org/10.1068/p5025>)
- [36] Yoshioka T, Bensmaïa S J, Craig J C and Hsiao S S 2007 Texture perception through direct and indirect touch: an analysis of perceptual space for tactile textures in two modes of exploration *Somatosensory & Motor Research* **24** 53–70
- [37] Adams M J, Johnson S, Lefèvre P, Lévesque V, Hayward V, André T and Thonnard J-L 2013 Finger pad friction and its role in grip and touch *J. R. Soc. Interface* **10** 20120467
- [38] André T, Lévesque V, Hayward V, Lefèvre P and Thonnard J-L 2011 Effect of skin hydration on the dynamics of fingertip gripping contact *J. R. Soc. Interface* **8** 1574–83
- [39] Skedung L, Harris K, Collier E S, Arvidsson M, Wäckerlin A, Haag W, Bieri M, Romanyuk A and Rutland M W 2018 Feeling smooth: psychotribological probing of molecular composition *Tribol. Lett.* **66** 138
- [40] Nam S, Vardar Y, Gueorguiev D and Kuchenbecker K J 2020 Physical variables underlying tactile stickiness during fingerpad detachment *Front. Neurosci.* **14** 235
- [41] Rohou-Claquin B, Kaci A, Lemaire-Semail B and Gueorguiev D 2025 Recognition of 2D shapes with varying complexity and thickness on an ultrasonic tactile display *Haptics: Understanding Touch; Technology and Systems; Applications and Interaction Lecture Notes in Computer Science* vol 14769 ed H Kajimoto, P Lopes, C Pacchierotti, C Basdogan, M Gori, B Lemaire-Semail and M Marchal (Springer Nature) 48–60
- [42] Gueorguiev D, Lambert J, Thonnard J-L and Kuchenbecker K J 2022 Normal and tangential forces combine to convey contact pressure during dynamic tactile stimulation *Sci Rep.* **12** 8215
- [43] Schepers R J and Ringkamp M 2010 Thermoreceptors and thermosensitive afferents *Neuroscience & Biobehavioral Reviews* **34** 177–84
- [44] Stevens Kenneth C and Choo J K 1998 Temperature sensitivity of the body surface over the life span *Somatosensory & Motor Research* **15** 13–28
- [45] Li X, Petrini L, Defrin R, Madeleine P and Arendt-Nielsen L 2008 High resolution topographical mapping of warm and cold sensitivities *Clinical Neurophysiology* **119** 2641–6
- [46] Darian-Smith I and Johnson K O 1977 Thermal Sensibility And Thermoreceptors *Journal of Investigative Dermatology* **69** 146–53
- [47] Katz D 1925 *The World of Touch*
- [48] Ho H and Jones L A 2004 Material identification using real and simulated thermal cues *The 26th Annual International Conference of the IEEE Engineering in Medicine and Biology Society* vol 3 (San Francisco, CA, USA: IEEE) 2462–5
- [49] Jones L A and Berris M 2003 Material discrimination and thermal perception *11th Symposium on Haptic Interfaces for Virtual Environment and Teleoperator Systems, 2003. HAPTICS 2003. Proceedings. 11th Symposium on Haptic Interfaces for Virtual Environment and Teleoperator Systems* (IEEE Comput. Soc.) 171–8
- [50] Yang G-H, Kwon D-S and Jones L A 2009 Spatial acuity and summation on the hand: The role of thermal cues in material discrimination *Perception & Psychophysics* **71** 156–63
- [51] Yang G-H, Jones L A and Kwon D-S 2008 Use of simulated thermal cues for material discrimination and identification with a multi-fingered display *Presence: Teleoperators and Virtual Environments* **17** 29–42
- [52] Dyck P J, Curtis D J, Bushek W and Offord K 1974 Description of ‘minnesota thermal disks’ and normal values of cutaneous thermal discrimination in man *Neurology* **24** 325–325
- [53] Bergmann Tiest W M and Kappers A M L 2008 Thermosensory reversal effect quantified *Acta Psychologica* **127** 46–50
- [54] Erickson R P and Poulos D A 1973 On the qualitative aspect of the temperature sense *Brain Res.* **61** 107–12
- [55] Caldwell D G and Gosney C 1993 Enhanced tactile feedback (tele-taction) using a multi-functional sensory system [1993/ *Proc. IEEE Int. Conf. on Robotics and Automation* [1993/ *IEEE Int. Conf. on Robotics and Automation* (Atlanta, GA (IEEE Comput. Soc. Press) 955–60
- [56] Ino S, Shimizu S, Odagawa T, Sato M, Takahashi M, Izumi T and Ifukube T 1993 A tactile display for presenting quality of materials by changing the temperature of skin surface *Proc. of 1993 2nd IEEE Int. Workshop on Robot and Human Communication 1993 2nd (IEEE Int. Workshop on Robot and Human Communication) (Tokyo, Japan)* (IEEE) 220–4
- [57] Parianen Lesemann F H, Reuter E-M and Godde B 2015 Tactile stimulation interventions: Influence of stimulation parameters on sensorimotor behavior and neurophysiological correlates in healthy and clinical samples *Neuroscience & Biobehavioral Reviews* **51** 126–37

- [58] Sterr A, Green L and Elbert T 2003 Blind Braille readers mislocate tactile stimuli *Biological Psychology* **63** 117–27
- [59] Sterr A, Müller M M, Elbert T, Rockstroh B, Pantev C and Taub E 1998 Changed perceptions in Braille readers *Nature* **391** 134–5
- [60] Sterr A, Müller M M, Elbert T, Rockstroh B, Pantev C and Taub E 1998 Perceptual correlates of changes in cortical representation of fingers in blind multifinger braille readers *J. Neurosci.* **18** 4417–23
- [61] Kieliba P, Clode D, Maimon-Mor R O and Makin T R 2021 Robotic hand augmentation drives changes in neural body representation *Sci. Robot.* **6** eabd7935
- [62] Dione M and Facchini J 2021 Experience-driven remodeling of S1 digit representation in awake monkeys: the challenge of comparing active and passive touch *Journal of Neurophysiology* **125** 805–8
- [63] Vallbo A B and Johansson R S 1984 Properties of cutaneous mechanoreceptors in the human hand related to touch sensation *Human Neurobio*
- [64] Vallbo A B, Olsson H, Wessberg J and Kakuda N 1995 Receptive field characteristics of tactile units with myelinated afferents in hairy skin of human subjects *The Journal of Physiology* **483** 783–95
- [65] Schirmer A, Croy I and Ackerley R 2023 What are C-tactile afferents and how do they relate to ‘affective touch’? *Neuroscience & Biobehavioral Reviews* **151** 105236
- [66] Saal H P and Bensmaia S J 2014 Touch is a team effort: interplay of submodalities in cutaneous sensibility *Trends in Neurosciences* **37** 689–97
- [67] Johansson R S and Flanagan J R 2009 Coding and use of tactile signals from the fingertips in object manipulation tasks *Nat. Rev. Neurosci.* **10** 345–59
- [68] Corniani G and Saal H P 2020 Tactile innervation densities across the whole body *Journal of Neurophysiology* **124** 1229–40
- [69] Keyson D V and Houtsmas A J M 1995 Directional sensitivity to a tactile point stimulus moving across the fingerpad *Perception & Psychophysics* **57** 738–44
- [70] Srinivasan M A and LaMotte R H 1991 Encoding of shape in the responses of cutaneous mechanoreceptors *Information Processing in the Somatosensory System* ed O Franzén and J Westman (Macmillan Education UK) 59–69
- [71] Johnson K 2001 The roles and functions of cutaneous mechanoreceptors *Curr. Opin. Neurobiol.* **11** 455–61
- [72] Pruszynski J A and Johansson R S 2014 Edge-orientation processing in first-order tactile neurons *Nat. Neurosci.* **17** 1404–9
- [73] Johansson R S and Birznieks I 2004 First spikes in ensembles of human tactile afferents code complex spatial fingertip events *Nat. Neurosci.* **7** 170–7
- [74] Weber A I, Saal H P, Lieber J D, Cheng J-W, Manfredi L R, Dammann J F and Bensmaia S J 2013 Spatial and temporal codes mediate the tactile perception of natural textures *Proc. Natl. Acad. Sci. U.S.A.* **110** 17107–12
- [75] Phillips J, Johansson R and Johnson K 1992 Responses of human mechanoreceptive afferents to embossed dot arrays scanned across fingerpad skin *J. Neurosci.* **12** 827–39
- [76] Birznieks I, Macefield V G, Westling G and Johansson R S 2009 Slowly adapting mechanoreceptors in the borders of the human fingernail encode fingertip forces *J. Neurosci.* **29** 9370–9
- [77] Pilz K, Veit R, Braun C and Godde B 2004 Effects of co-activation on cortical organization and discrimination performance *NeuroReport* **15** 2669–72
- [78] Lea-Carnall C A, Trujillo-Barreto N J, Montemurro M A, El-Dereby W and Parkes L M 2017 Evidence for frequency-dependent cortical plasticity in the human brain *Proc. Natl. Acad. Sci. U.S.A.* **114** 8871–6
- [79] Elbert T, Pantev C, Wienbruch C, Rockstroh B and Taub E 1995 Increased cortical representation of the fingers of the left hand in string players *Science* **270** 305–7
- [80] Elbert T, Flor H, Birbaumer N, Knecht S, Hampson S, Larbig W and Taub E 1994 Extensive reorganization of the somatosensory cortex in adult humans after nervous system injury *NeuroReport* **5** 2593–7
- [81] Yang T T, Gallen C, Ramachandran V S, Cobb S, Schwartz B J and Bloom F E 1994 Noninvasive detection of cerebral plasticity in adult human somatosensory cortex *NeuroReport* **5** 701–4
- [82] Coq J-O and Xerri C 1998 Environmental enrichment alters organizational features of the forepaw representation in the primary somatosensory cortex of adult rats *Experimental Brain Research* **121** 191–204
- [83] Cybulska-Klosowicz A, Tremblay F, Jiang W, Bourgeon S, Meftah E-M and Chapman C E 2020 Differential effects of the mode of touch, active and passive, on experience-driven plasticity in the S1 cutaneous digit representation of adult macaque monkeys *Journal of Neurophysiology* **123** 1072–89
- [84] Elbert T, Candia V, Altenmüller E, Rau H, Sterr A, Rockstroh B, Pantev C and Taub E 1998 Alteration of digital representations in somatosensory cortex in focal hand dystonia *NeuroReport* **9** 3571–5
- [85] Flor H, Elbert T, Knecht S, Wienbruch C, Pantev C, Birbaumer N, Larbig W and Taub E 1995 Phantom-limb pain as a perceptual correlate of cortical reorganization following arm amputation *Nature* **375** 482–4
- [86] Goldreich D and Kanics I M 2003 Tactile acuity is enhanced in blindness *J. Neurosci.* **23** 3439–45
- [87] Wong M, Gnanakumaran V and Goldreich D 2011 Tactile spatial acuity enhancement in blindness: evidence for experience-dependent mechanisms *J. Neurosci.* **31** 7028–37
- [88] Sanchez Panchuelo R M, Ackerley R, Glover P M, Bowtell R W, Wessberg J, Francis S T and McGlone F 2016 Mapping quantal touch using 7 tesla functional magnetic resonance imaging and single-unit intraneural microstimulation *eLife* **5** e12812
- [89] Wang X, Merzenich M M, Sameshima K and Jenkins W M 1995 Remodelling of hand representation in adult cortex determined by timing of tactile stimulation *Nature* **378** 71–5
- [90] Godde B, Spengler F and Dinse H 1996 Associative pairing of tactile stimulation induces somatosensory cortical reorganization in rats and humans *NeuroReport* **8** 281–5
- [91] Deflorio D, Di Luca M and Wing A M 2022 Skin and mechanoreceptor contribution to tactile input for perception: a review of simulation models *Front. Hum. Neurosci.* **16** 862344
- [92] Gerling G J, Rivest I I, Lesniak D R, Scanlon J R and Wan L 2014 Validating a population model of tactile mechanotransduction of slowly adapting type I afferents at levels of skin mechanics, single-unit response and psychophysics *IEEE Trans. Haptics* **7** 216–28
- [93] Saal H P, Delhaye B P, Rayhaun B C and Bensmaia S J 2017 Simulating tactile signals from the whole hand with millisecond precision *Proc. Natl. Acad. Sci. U.S.A.* **114** E5693–702
- [94] Hay E and Pruszynski J A 2020 Orientation processing by synaptic integration across first-order tactile neurons ed B A Richards *PLoS Comput. Biol.* **16** e1008303
- [95] Goodwin A W, John K T and Marceglia A H 1991 Tactile discrimination of curvature by humans using only cutaneous information from the fingerpads *Exp. Brain Res.* **86** 663–72
- [96] Olczak D, Sukumar V and Pruszynski J A 2018 Edge orientation perception during active touch *Journal of Neurophysiology* **120** 2423–9
- [97] Delhaye B P, O'Donnell M K, Lieber J D, McLellan K R and Bensmaia S J 2019 Feeling fooled: Texture contaminates the neural code for tactile speed ed A Kohn *PLoS Biol.* **17**, e3000431
- [98] Deflorio D, Di Luca M and Wing A M 2023 Skin properties and afferent density in the deterioration of tactile spatial acuity with age *The Journal of Physiology* **601** 517–33

- [99] Yang Y, Wang L, Yan F, Xiang X, Tang Y, Zhang L, Liu J and Qiu L 2018 Determination of normal skin elasticity by using real-time shear wave elastography *Journal of Ultrasound in Medicine* **37** 2507–16
- [100] García-Piqueras J, García-Mesa Y, Cárcaba L, Feito J, Torres-Parejo I, Martín-Biedma B, Cobo J, García-Suárez O and Vega J A 2019 Ageing of the somatosensory system at the periphery: age-related changes in cutaneous mechanoreceptors *Journal of Anatomy* **234** 839–52
- [101] Katic N, Siqueira R K, Cleland L, Strzalkowski N, Bent L, Raspopovic S and Saal H 2023 Modeling foot sole cutaneous afferents: footsim *iScience* **26** 105874
- [102] Foffani G, Chapin J K and Moxon K A 2008 Computational role of large receptive fields in the primary somatosensory cortex *Journal of Neurophysiology* **100** 268–80
- [103] Detorakis G I and Rougier N P 2014 Structure of receptive fields in a computational model of area 3b of primary sensory cortex *Front. Comput. Neurosci.* **8**
- [104] Horch K 1991 Coding of vibrotactile stimulus frequency by Pacinian corpuscle afferents *J. Acoust. Soc. Am.* **89** 2827–36
- [105] Bensmaïa S and Hollins M 2005 Pacinian representations of fine surface texture *Perception & Psychophysics* **67** 842–54
- [106] Senkow T, Theis N, Quindlen-Hotek J and Barocas V 2019 Computational and Psychophysical Experiments on the Pacinian Corpuscle's Ability to Discriminate Complex Stimuli *IEEE Trans. Haptics* **12** 635–44
- [107] Lim C and Park G 2023 Can a Computer Tell Differences between Vibrations?: Physiology-Based Computational Model for Perceptual Dissimilarity prediction *Proceedings of the 2023 CHI Conference on Human Factors in Computing Systems CHI '23: CHI Conference on Human Factors in Computing Systems (Hamburg Germany) (ACM)* 1–15
- [108] Bolanowski S J, Gescheider G A, Verrillo R T and Checkosky C M 1988 Four channels mediate the mechanical aspects of touch *J. Acoust. Soc. Am.* **84** 1680–94
- [109] Bensmaïa S, Hollins M and Yau J 2005 Vibrotactile intensity and frequency information in the Pacinian system: a psychophysical model *Perception & Psychophysics* **67** 828–41
- [110] Scheibert J, Leurent S, Prevost A and Debrégeas G 2009 The role of fingerprints in the coding of tactile information probed with a biomimetic sensor *Science* **323** 1503–6
- [111] Choi S and Kuchenbecker K J 2013 Vibrotactile display: perception, technology, and applications *Proc. IEEE* **101**, 2093–104
- [112] Seifi H, Fazlollahi F, Oppermann M, Sastrillo J A, Ip J, Agrawal A, Park G, Kuchenbecker K J and MacLean K E 2019 Haptipedia: Accelerating Haptic Device Discovery to Support Interaction & Engineering Design *Proc. of the 2019 CHI Conf. on Human Factors in Computing Systems (ACM)* 1–12
- [113] Vezzoli E, Sednaoui T, Amberg M, Giraud F and Lemaire-Semail B 2016 Texture rendering strategies with a high fidelity - capacitive visual-haptic friction control device *Haptics: Perception, Devices, Control, and Applications Lecture Notes in Computer Science* 9774 ed F Bello, H Kajimoto and Y Visell (Springer International Publishing) 251–60
- [114] Gueorguiev D, Vezzoli E, Mouraux A, Lemaire-Semail B and Thonnard J-L 2017 The tactile perception of transient changes in friction *J. R. Soc. Interface* **14** 20170641
- [115] Gueorguiev D, Vezzoli E, Sednaoui T, Grisoni L and Lemaire-Semail B 2019 The perception of ultrasonic square reductions of friction with variable sharpness and duration *IEEE Trans. Haptics* **12** 179–88
- [116] Dione M, Watkins R H, Vezzoli E, Lemaire-Semail B and Wessberg J 2021 Human low-threshold mechanoafferent responses to pure changes in friction controlled using an ultrasonic haptic device *Sci Rep.* **11** 11227
- [117] Messaoud W B, Bueno M-A and Lemaire-Semail B 2016 Relation between human perceived friction and finger friction characteristics *Tribol. Int.* **98** 261–9
- [118] Kalantari F, Gueorguiev D, Lank E, Bremard N and Grisoni L 2018 Exploring fingers' limitation of texture density perception on ultrasonic haptic displays *Haptics: Science, Technology, and Applications Lecture Notes in Computer Science* 10893 ed D Prattichizzo, H Shinoda, H Z Tan, E Ruffaldi and A Frisoli (Springer International Publishing) 354–65
- [119] Pantera L, Hudin C and Panëls S 2020 Two-Point Haptic Pattern Recognition with the Inverse Filter Method *12th Int. Conf., EuroHaptics 2020 (Leiden, Netherlands)* 545–53
- [120] Daunizeau T, Gueorguiev D, Haliyo S and Hayward V 2021 Phononic crystals applied to localised surface haptics *IEEE Trans. Haptics* **14** 668–74
- [121] Cai Z and Wiertelowski M 2023 Ultraloop: active lateral force feedback using resonant traveling waves *IEEE Trans. Haptics* **16** 652–7
- [122] Sirin O, Ayyildiz M, Persson B N J and Basdogan C 2019 Electrodehesion with application to touchscreens *Soft Matter* **15** 1758–75
- [123] Rakkolainen I, Freeman E, Sand A, Raisamo R and Brewster S 2021 A survey of mid-air ultrasound haptics and its applications *IEEE Trans. Haptics* **14** 2–19
- [124] Georgiou O, Frier W and Schneider O 2022 User Experience and Mid-Air Haptics: Applications, Methods, and Challenges (Ultrasound Mid-Air Haptics for Touchless Interfaces) *Human-Computer Interaction Series* ed O Georgiou, W Frier, E Freeman, C Pacchierotti and T Hoshi (Springer International Publishing) 21–69
- [125] Cataldo A, Frier W and Haggard P 2023 Quantifying spatial acuity of frequency resolved midair ultrasound vibrotactile stimuli *Sci Rep.* **13** 21149
- [126] Rolke R et al 2006 Quantitative sensory testing in the german research network on neuropathic pain (dfns): standardized protocol and reference values *Pain* **123** 231–43
- [127] Cascio C, McGlone F, Folger S, Tannan V, Baranek G, Pelphrey K A and Essick G 2008 Tactile perception in adults with autism: a multidimensional psychophysical study *J Autism Dev Disord* **38** 127–37
- [128] Dione M, Watkins R H, Aimonetti J-M, Jourdain R and Ackerley R 2023 Effects of skin moisturization on various aspects of touch showing differences with age and skin site *Sci Rep.* **13** 17977
- [129] Brown C, Tollefson N, Dunn W, Cromwell R and Filion D 2001 The adult sensory profile: measuring patterns of sensory processing *The American Journal of Occupational Therapy* **55** 75–82
- [130] McIntyre S, Nagi S S, McGlone F and Olausson H 2021 The effects of ageing on tactile function in humans *Neuroscience* **464** 53–8
- [131] Samain-Aupic L, Dione M, Ribot-Ciscar E, Ackerley R and Aimonetti J-M 2024 Relations between tactile sensitivity of the finger, arm, and cheek skin over the lifespan showing decline only on the finger *Front. Aging Neurosci.* **16** 1387136
- [132] Stevens J C and Choo K K 1996 Spatial acuity of the body surface over the life span *Somatosensory & Motor Research* **13** 153–66
- [133] Skedung L, El Rawadi C, Arvidsson M, Farcet C, Luengo G S, Breton L and Rutland M W 2018 Mechanisms of tactile sensory deterioration amongst the elderly *Sci Rep.* **8** 5303
- [134] Sousa E, Sampaio R, Sotgiu E, Ribeiro G, Silva C and Vieira J 2022 Tactile and visual perception of plastic textures for car interiors: psychophysical and affective dimensions *Int. J. Ind. Ergon.* **92** 103369
- [135] Zuo H, Jones M, Hope T and Jones R 2016 Sensory perception of material texture in consumer products *The Design Journal* **19** 405–27
- [136] Ha K-H 2025 Full freedom-of-motion actuators as advanced haptic interfaces *Science* **387** 1383–90
- [137] Liu F, Deswal S, Christou A, Sandamirskaya Y, Kaboli M and Dahiya R 2022 Neuro-inspired electronic skin for robots *Sci. Robot.* **7** eabl7344
- [138] Leogrande E, Filosa M, Ballanti S, De Cicco L, Mazzoleni S, Ackerley R, Oddo C M and Dell'Olio F 2025 Electronic skin technologies: from hardware building blocks and tactile sensing to control algorithms and applications *Sensors and Actuators Reports* **9** 100312

- [139] Lepora N F, Martinez-Hernandez U, Evans M, Natale L, Metta G and Prescott T J 2015 Tactile superresolution and biomimetic hyperacuity *IEEE Trans. Robot.* **31** 605–18
- [140] Drewing K, Lezkan A and Ludwig S 2011 Texture discrimination in active touch: effects of the extension of the exploration and their exploitation *IEEE World Haptics Conf. 2011 IEEE World Haptics Conf. (WHC 2011)* 2011 (Istanbul: IEEE) 215–20
- [141] Drewing K and Kaim L 2009 Haptic shape perception from force and position signals varies with exploratory movement direction and the exploring finger *Attention, Perception, & Psychophysics* **71** 1174–84
- [142] Morash V S 2016 Systematic movements in haptic search: spirals, zigzags, and parallel sweeps *IEEE Trans. Haptics* **9** 100–10
- [143] Ragert P, Schmidt A, Altenmüller E and Dinse H R 2004 Superior tactile performance and learning in professional pianists: evidence for meta-plasticity in musicians *Eur J of Neuroscience* **19** 473–8
- [144] Hughes B, Wang J, Rosic D and Palmer K 2007 Texture Gradients and Perceptual Constancy under Haptic Exploration *Second Joint EuroHaptics Conference and Symposium on Haptic Interfaces for Virtual Environment and Teleoperator Systems (WHC'07)* 2007 2nd Joint EuroHaptics Conference and Symposium on Haptic Interfaces for Virtual Environments and Teleoperator Systems (Tsukuba, Japan: IEEE) 66–71
- [145] Boven R W V, Hamilton R H, Kauffman T, Keenan J P and Pascual A 2000 Tactile spatial resolution in blind Braille readers *Neurology* **54** 2230–6
- [146] Silva E, Lisboa I C and Costa N 2024 How to determine hands' vibration perception thresholds—a systematic review *Behav Res Methods* **57** 27